





EDCON-COMPONENTS

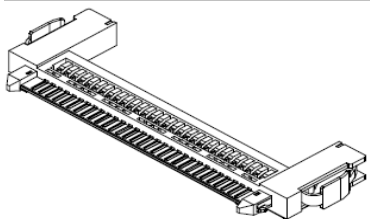

Specifications

Voltage Rating:	200 V AC/DC
Current Rating:	1A AC/DC
Operating Temperature:	-25°C to +85°C
Contact Resistance:	40 mΩ
Withstanding Voltage:	500 V AC/Minute
Insulation Resistance:	100MΩ min.
Material Housing:	Nylon 46 / UL94V-0
Body Color	Natural (Black)
Ground Plate	Stainless
Lock Lever	Stainless

Drawing (dimensions all into mm)

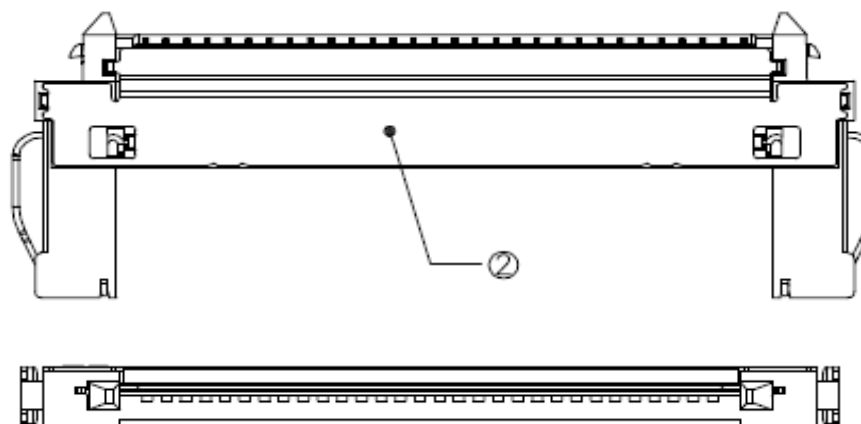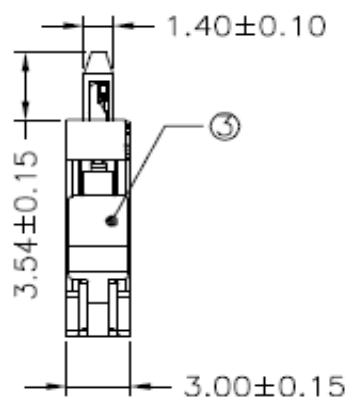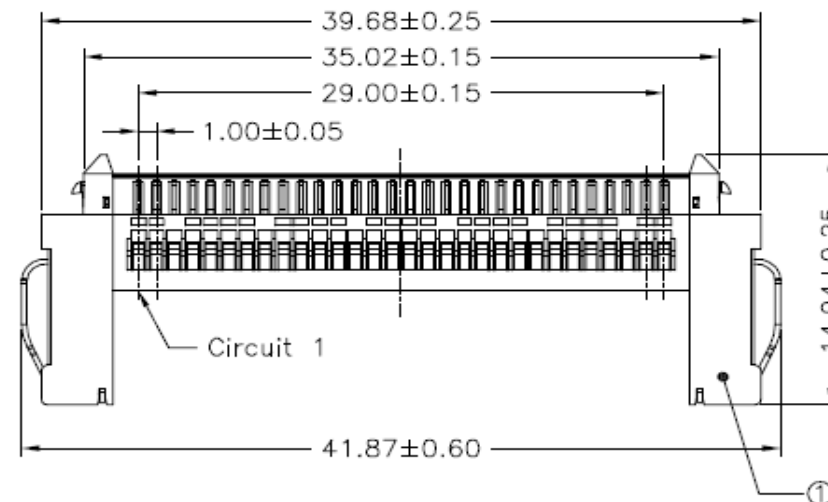


Housing Serie T68Lxxxx Pitch 1,00mm
Part No.: T68L034
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

www.edcon-components.com

email: info@edcon-components.com

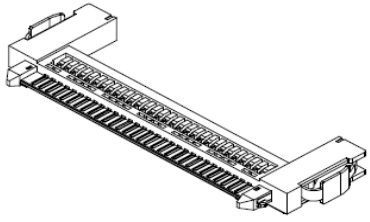

Dimension Information about Housing


Dimension (mm)						
Pos.	A	B	C	D	E	F

Dimension (mm)						
Pos.	A	B	C	D	E	F

Housing Serie T68Lxxxx Pitch 1,00mm	
Part No.:	T68L034
Customer:	

DRW:	Jason	CHKD:	Wilson	MATL:	Wilson	TOLERANCE:	Mason	DATE:	02.04.2009	Sheet No. 2 from 3
APPD:	Schumi			FINISH:	Jamy					

EDCON-COMPONENTS

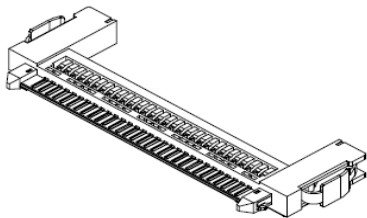

Ordering Informations

Serie	Number of Pos.	Color of Body	Packing							
T68L034	30	WH	TY							
xx = Pos.	WH= White	TY= Tray Packing								

Housing Serie T68Lxxxx Pitch 1,00mm
Part No.: T68L034
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	

www.edcon-components.com

email: info@edcon-components.com