


EDCON-COMPONENTS





Specifications

Voltage Rating: 250 V AC/DC
 Current Rating: 4A AC/DC
 Operating Temperature: -25°C to + 85°C
 Contact Resistance: 10 mΩ
 Withstanding Voltage: 1000 V AC/Minute
 Insulation Resistance: 1000MΩ min.
 Material Housing: Nylon 66 / UL94V-2
 Pantone Case Color: 1685C




Drawing (dimensions all into mm)

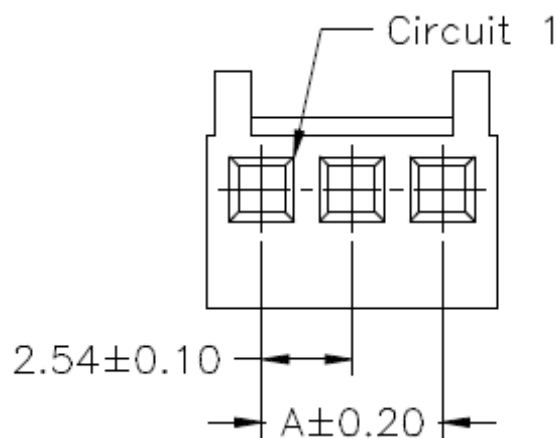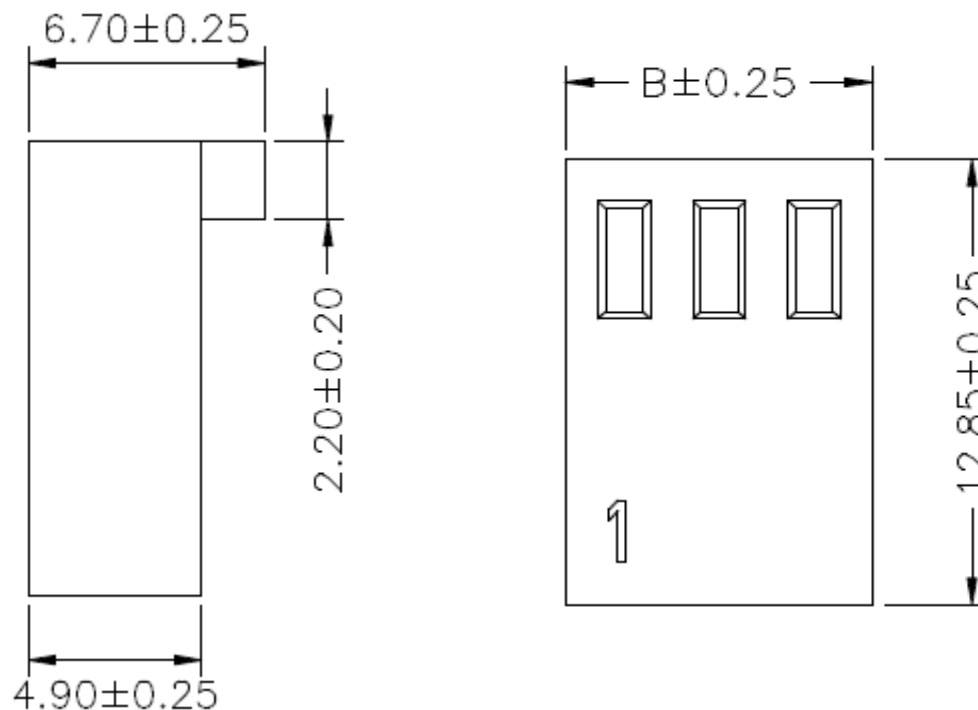

| | |
|---|----------------|
| Housing Serie T68Nxxx Pitch 2,54mm | |
| Part No.: | T68N028 |
| Customer: | |

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 02.04.2009 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 1 from 3 |

EDCON-COMPONENTS



Dimension Information about Housing


| Pos. | Dimension (mm) | | | | | |
|------|----------------|-------|---|---|---|---|
| | A | B | C | D | E | F |
| 2 | 2,54 | 5,68 | | | | |
| 3 | 5,08 | 8,22 | | | | |
| 4 | 7,62 | 10,76 | | | | |
| 5 | 10,16 | 13,30 | | | | |
| 6 | 12,70 | 15,84 | | | | |
| 7 | 15,24 | 18,38 | | | | |
| 8 | 17,78 | 20,92 | | | | |
| 9 | 20,32 | 23,46 | | | | |
| 10 | 22,86 | 26,00 | | | | |
| 11 | 25,40 | 28,54 | | | | |
| 12 | 27,94 | 31,08 | | | | |
| 13 | 30,48 | 33,62 | | | | |
| 14 | 33,02 | 36,16 | | | | |
| 15 | 35,56 | 38,70 | | | | |
| 16 | 38,10 | 41,24 | | | | |
| 17 | 40,64 | 43,78 | | | | |
| 18 | 43,18 | 46,32 | | | | |
| 19 | 45,72 | 48,86 | | | | |
| 20 | 48,26 | 51,40 | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

| Pos. | Dimension (mm) | | | | | |
|------|----------------|---|---|---|---|---|
| | A | B | C | D | E | F |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

| | |
|---|----------------|
| Housing Serie T68Nxxx Pitch 2,54mm | |
| Part No.: | T68N028 |
| Customer: | |

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 02.04.2009 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 2 from 3 |

EDCON-COMPONENTS



Ordering Informations

| Serie | Number of Pos. | Color of Body | Packing | | | | | | | |
|------------------|--------------------|-------------------------|-----------|--|--|--|--|--|--|--|
| T68N028 | 02 | NA | BU | | | | | | | |
| xx = Pos. | NA= Natural | BU= Bulk Packing | | | | | | | | |
| | WH= White | | | | | | | | | |

| |
|---|
| Housing Serie T68Nxxx Pitch 2,54mm |
| Part No.: T68N028 |
| Customer: |

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 02.04.2009 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 3 from 3 | |

www.edcon-components.com

email: info@edcon-components.com