




EDCON-COMPONENTS




Specifications

Voltage Rating:	250 V AC/DC
Current Rating:	4A AC/DC
Operating Temperature:	-25°C to + 85°C
Contact Resistance:	10 mΩ
Withstanding Voltage:	1000 V AC/Minute
Insulation Resistance:	1000MΩ min.
Material Housing:	Nylon 66 / UL94V-2
Pin-Material:	Brass /Tin-plated
Pantone Color of Body:	look order Code

Drawing (dimensions all into mm)

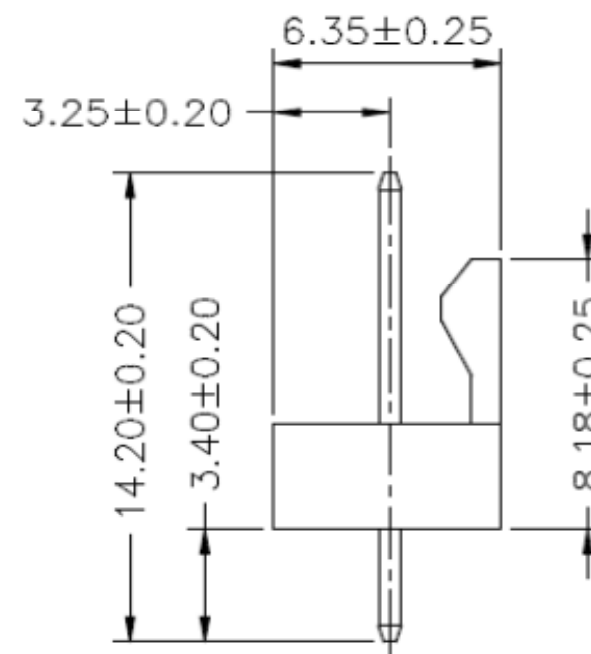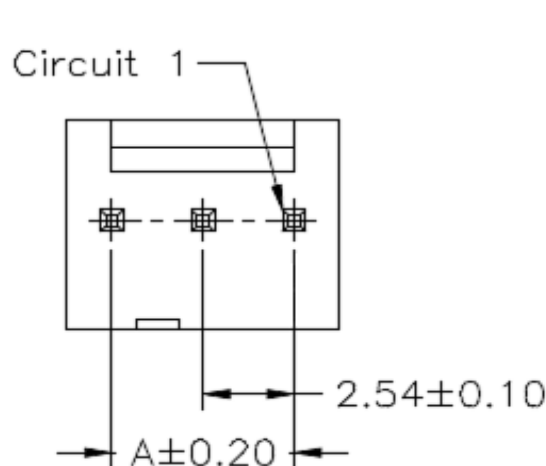

P.C.B. Layout

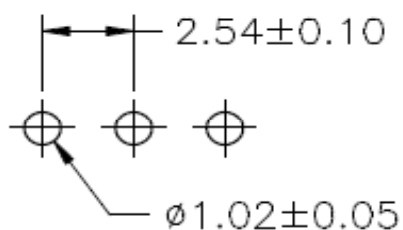


Wafer Serie T68Nxxxx Pitch
2,54mm

Part No.: **T68N036 -**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	09.01.2020
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Pos.	Leg function	Color of Body	Packing						
-------	----------------	--------------	---------------	---------	--	--	--	--	--	--


T68N036 -	02	N	WH	BU						
------------------	-----------	----------	-----------	-----------	--	--	--	--	--	--

xx = Pos.	N= without King	BN= Brown	BU= Bulk-ware							
		WH= White								




Wafer Serie T68Nxxxx Pitch 2,54mm
Part No.: T68N036 -
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	09.01.2020
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

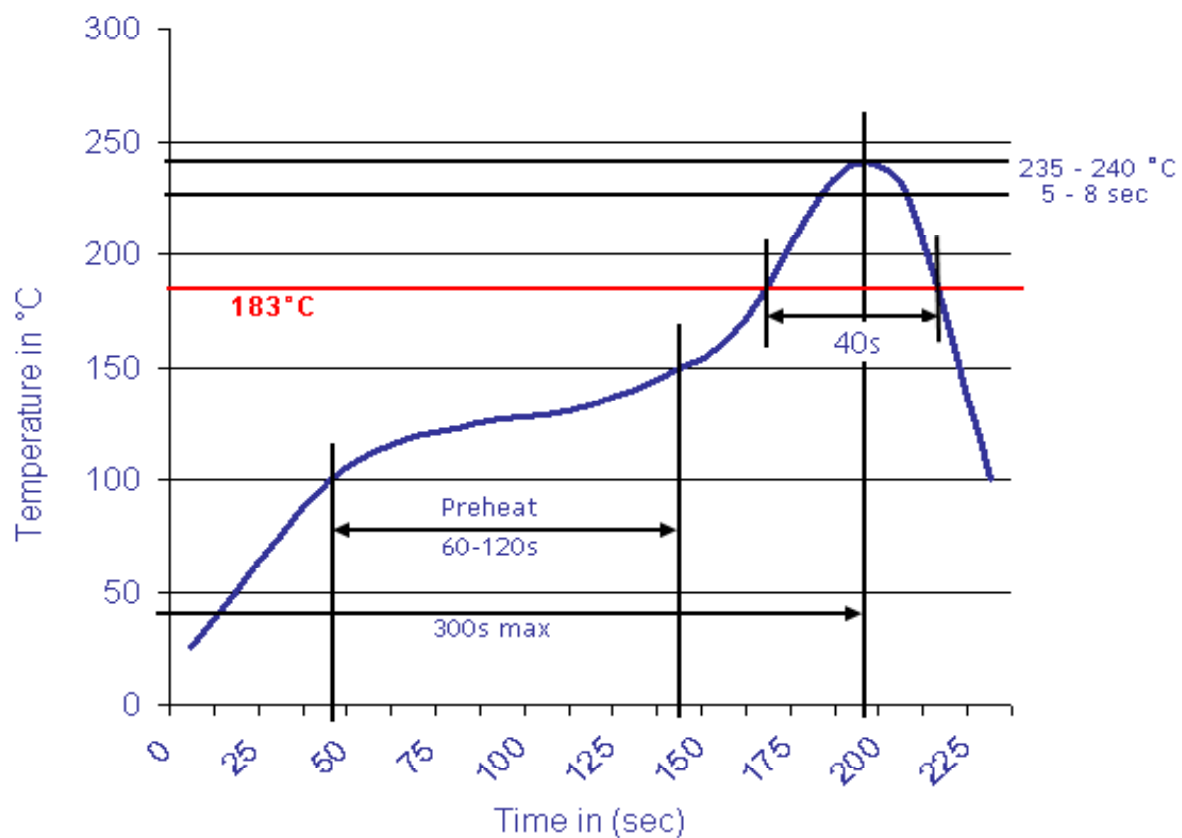

Wafer Serie T68Nxxxx Pitch 2,54mm
Part No.: T68N036 -
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	09.01.2020
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	