


EDCON-COMPONENTS






Specifications

Voltage Rating: 250 V AC/DC
 Current Rating: 4A AC/DC
 Operating Temperature: -25°C to + 85°C
 Contact Resistance: 10 mΩ
 Withstanding Voltage: 1000 V AC/Minute
 Insulation Resistance: 1000MΩ min.
 Material Housing: Nylon 66 / UL94V-0
 Pantone Body Color: 1685C



Drawing (dimensions all into mm)

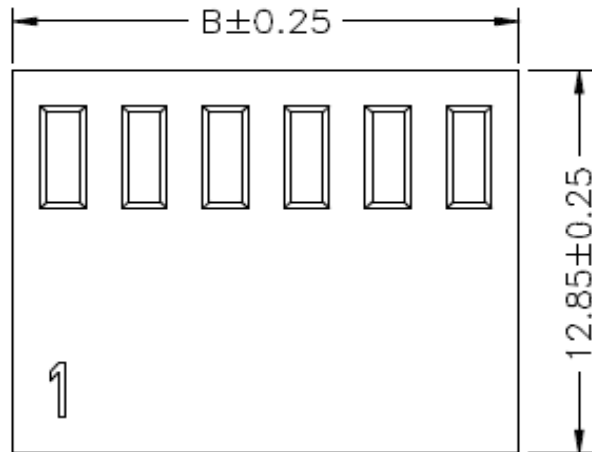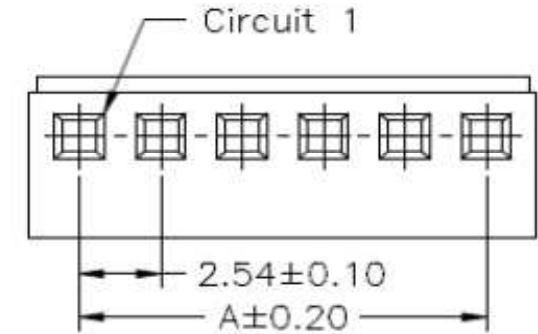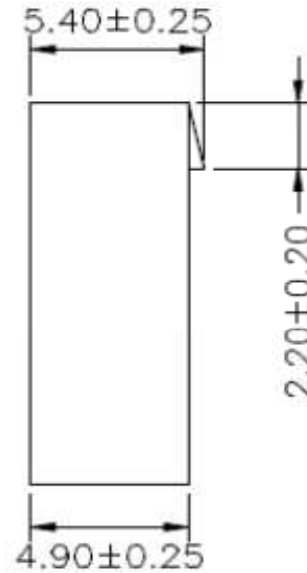


Housing Serie T68N040 Pitch 2,54mm

Part No.: **T68N040**

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 01.08.2022 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 1 from 3 | Customer: |

EDCON-COMPONENTS



Ordering Informations

| Serie | Number of Pos. | Color of Body | Packing | | | | | | | |
|----------------|------------------|------------------|-------------------------|--|--|--|--|--|--|--|
| T68N040 | 02 | BN | BU | | | | | | | |
| | xx = Pos. | BN= Brown | BU= Bulk Packing | | | | | | | |
| | | | | | | | | | | |

| |
|---|
| Housing Serie T68N040 Pitch 2,54mm |
| Part No.: T68N040 |
| Customer: |

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 01.08.2022 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 3 from 3 |