



# EDCON-COMPONENTS



## Specifications

Voltage Rating:	250VAC /DC
Current Rating	3 A AC / DC
Operating Temperature	-25°C ~ +85°C
Contact Resistance	20mΩ Max.
Withstanding Voltage	1500V AC/minute
Insulation Resistance	1000M Ω Min.
 Material Insulator:	 Nylon66+GF UL94V-0

## Drawing ( dimensions all into mm)

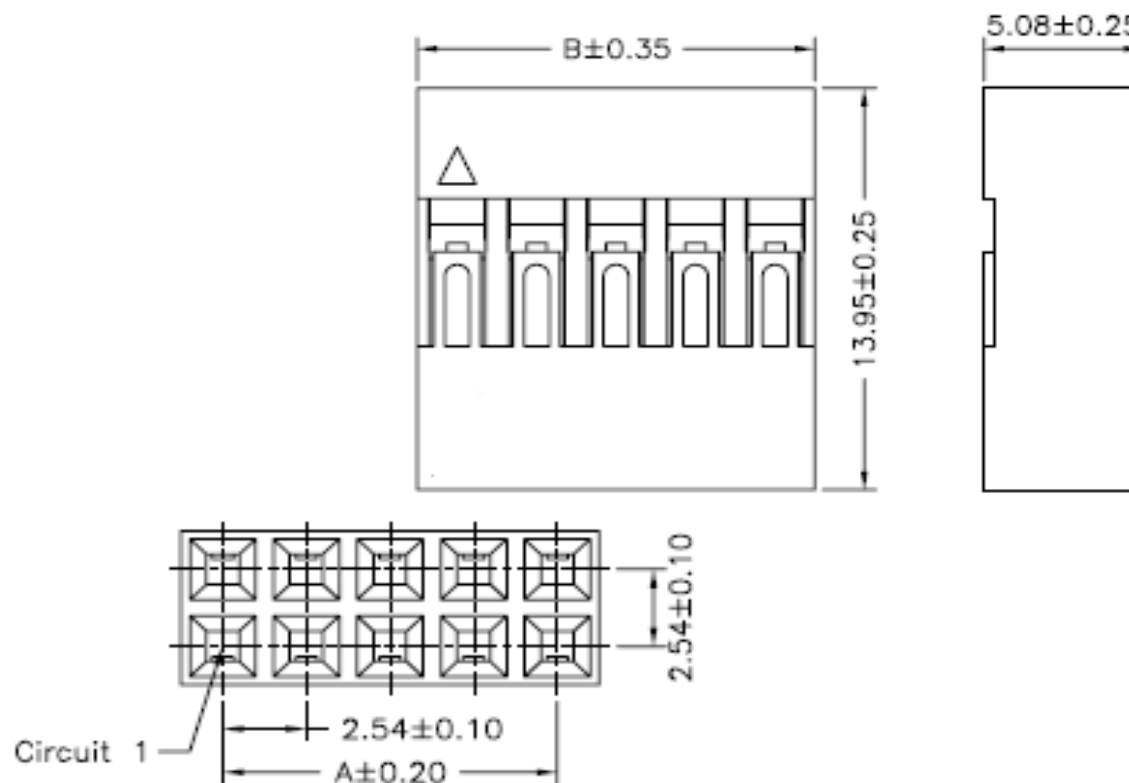

**Housing for Wire to Board Serie  
Pitch 2,54mm**


Part No.: **T68N042**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	



# EDCON-COMPONENTS



## Ordering Informations

Serie	Positions	Body Color	ROHS	Packing					
<b>T68N042</b>	<b>02</b>	<b>BK</b>	<b>R</b>	<b>BU</b>					

Look Table	<b>BK=</b> Black	<b>R=</b> ROHS Conform	<b>BU=</b> Bulk (Standard)
		<b>N=</b> NON ROHS Conform	

**Housing for Wire to Board Serie  
Pitch 2,54mm**

Part No.: **T68N042**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	Customer:

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)





