


EDCON-COMPONENTS





Specifications



Voltage Rating: 250 V AC/DC
 Current Rating: 3A AC/DC
 Operating Temperature: -40°C to + 105°C
 Contact Resistance: 20 mΩ
 Withstanding Voltage: 1500 V AC/Minute
 Insulation Resistance: 1000MΩ min.
 Material Housing: Nylon 6T (UL94V-0)

Pin-Material: Brass / Gold-flash
 Color of Base: Black

Drawing (dimensions all into mm)

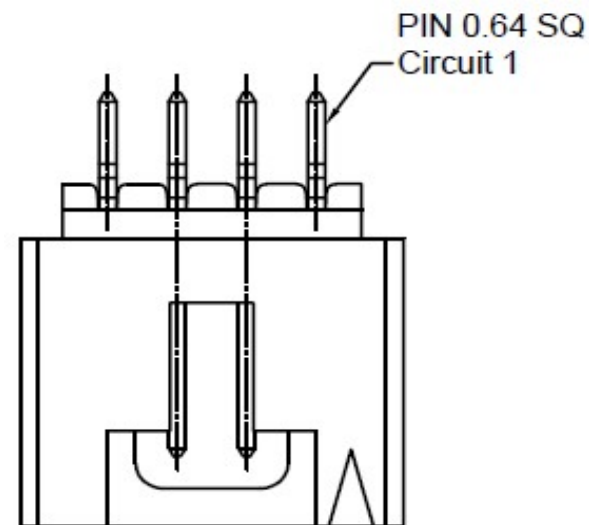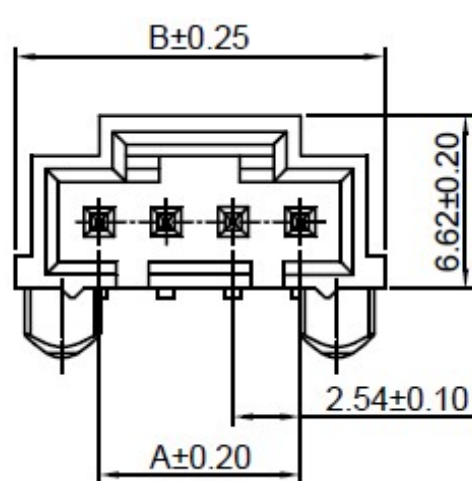

P.C.B. Layout

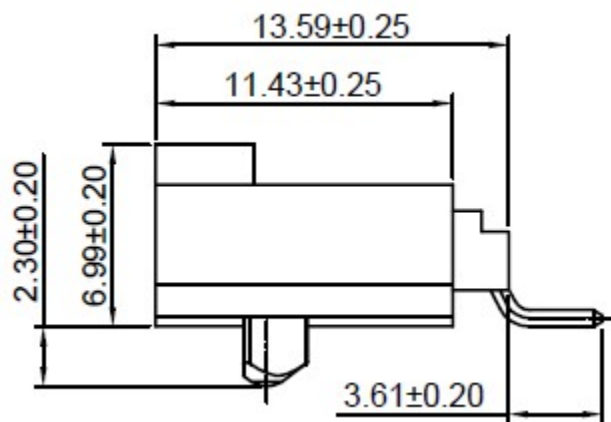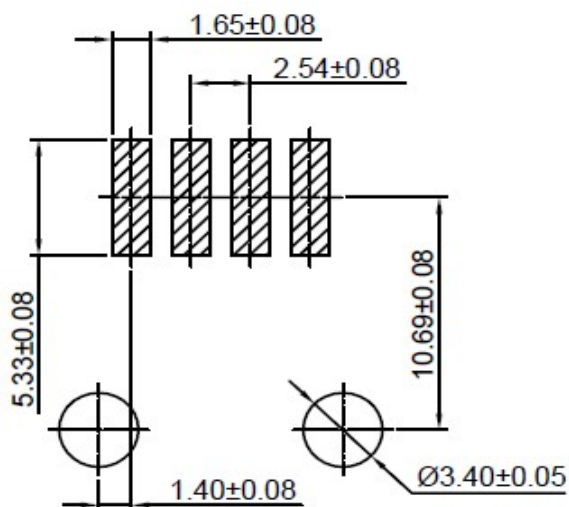

SMD Wafer Serie T68N070 Pitch 2,54mm

Part No.: **T68N070-**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.09.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4

Customer:

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Pos.	Contact Plating	Color of Body	Packing						
-------	----------------	-----------------	---------------	---------	--	--	--	--	--	--

T68N070-	02	GF	BK	BU						
-----------------	-----------	-----------	-----------	-----------	--	--	--	--	--	--


xx = like Pos. Table	GF= Gold Flash (standard) Gx = Other Contact Plating on request	BK= Black	BU= Bulk Ware						
			IV= Individual Packing						
			TR= Tape / Reel with PIC and Place Foil						
			TY= Tray Packing w. Pich and Place Foil						

SMD Wafer Serie T68N070 Pitch 2,54mm

Part No.: **T68N070-**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.09.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

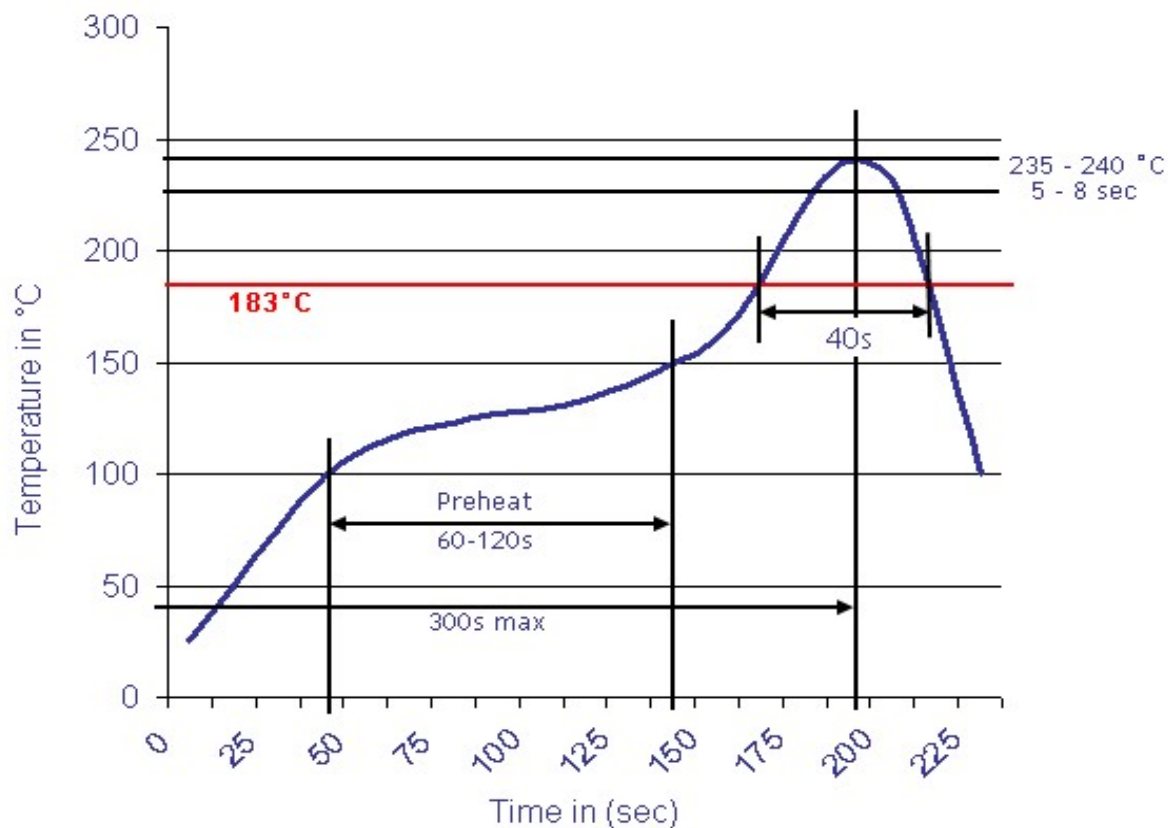

SMD Wafer Serie T68N070 Pitch
2,54mm

Part No.: **T68N070-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.09.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 4

Customer: