


EDCON-COMPONENTS




Specifications



Voltage Rating: 250 V AC/DC
 Current Rating: 3A AC/DC
 Operating Temperature: -25°C to + 85°C
 Contact Resistance: 10 mΩ
 Withstanding Voltage: 800 V AC/Minute
 Insulation Resistance: 1000MΩ min.
 Material Housing: Nylon 66 / UL94V-0

Pin-Material: Brass /Tin-plated
 Color of Base: Natural (White)



P.C.B. Layout



Drawing (dimensions all into mm)

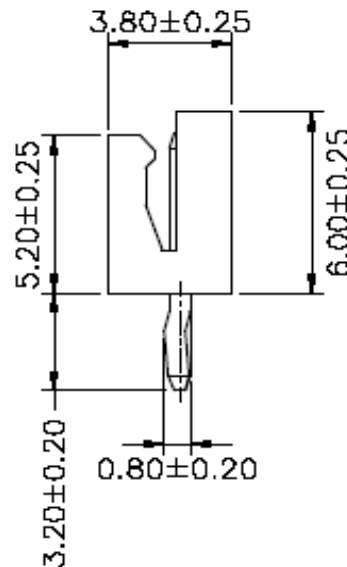

w/o Kink

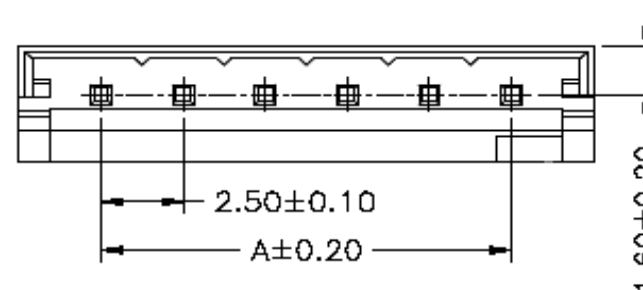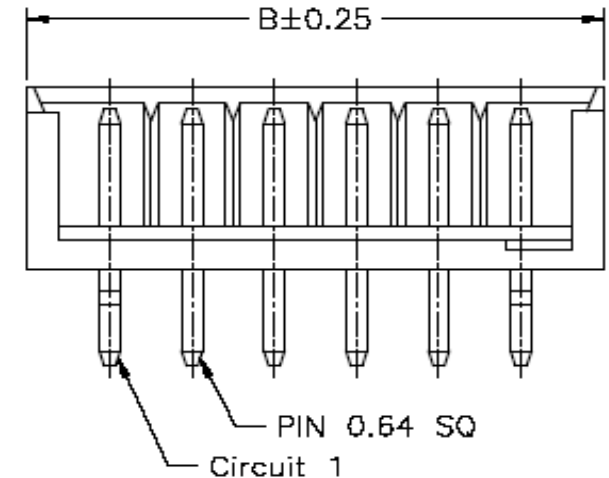

Wafer Serie T68Pxxxx Pitch
2,50mm

Part No.: **T68P030**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	


www.edcon-components.com

email: info@edcon-components.com

[illegible][illegible]

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Pos.	Leg Function	Color of Body	Packing						
T68P030	02	N	WH	BU						
	xx = Pos.	N= without Kink	WH= White	BU= Bulk Ware						
		K= with Kink								

Wafer Serie T68Pxxxx Pitch
2,50mm


Part No.: **T68P030**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:


www.edcon-components.com

email: info@edcon-components.com



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

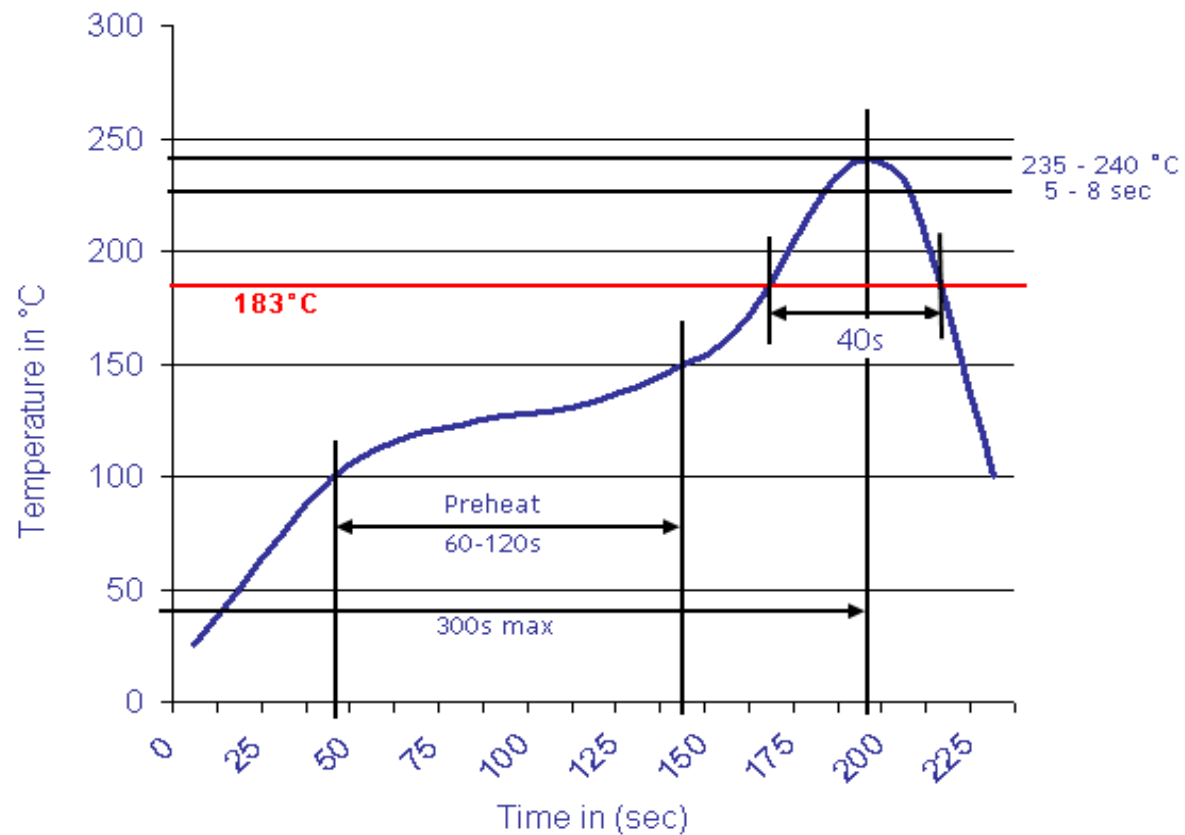
 Wafer Serie T68Pxxxx Pitch
 2,50mm

 Part No.: **T68P030**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	

 Customer:
 email: info@edcon-components.com