



EDCON-COMPONENTS





Specifications

Voltage Rating: 250 V AC/DC
 Current Rating: 3A AC/DC
 Operating Temperature: -25°C to + 85°C
 Contact Resistance: 20 mΩ
 Withstanding Voltage: 1000 V AC/Minute
 Insulation Resistance: 1000MΩ min.
 Material Housing: Nylon 66 / UL94V-0



Pin-Material: Brass /Tin-plated
 Pantone Color of Base: 7506 C



Drawing (dimensions all into mm)

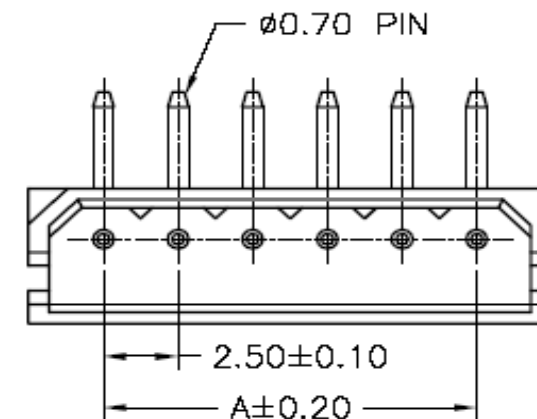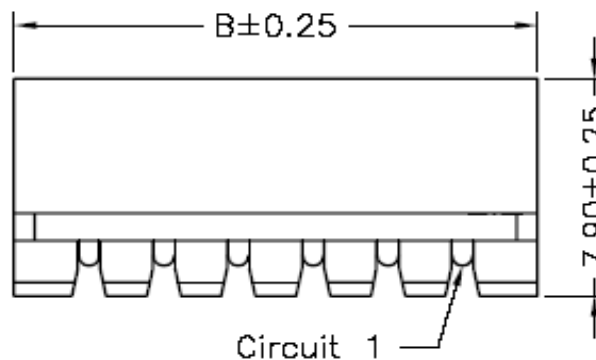

P.C.B. Layout

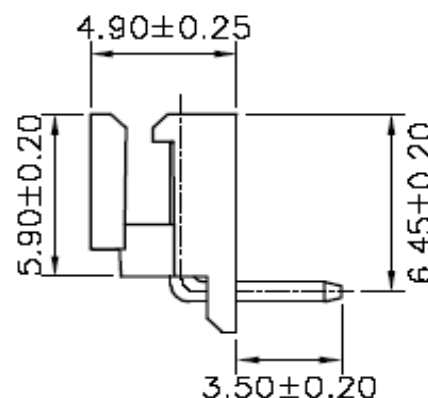


Wafer Serie T68Pxxxx Pitch
2,50mm

Part No.: **T68P038**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Pos.	Leg Function	Color of Body	Packing						
-------	----------------	--------------	---------------	---------	--	--	--	--	--	--

T68P038	02	N	BG	BU						
----------------	-----------	----------	-----------	-----------	--	--	--	--	--	--


xx = Pos.	N= without Kink	BG= Beige	BU= Bulk Ware						

Wafer Serie T68Pxxxx Pitch 2,50mm
Part No.: T68P038
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4


www.edcon-components.com

email: info@edcon-components.com



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

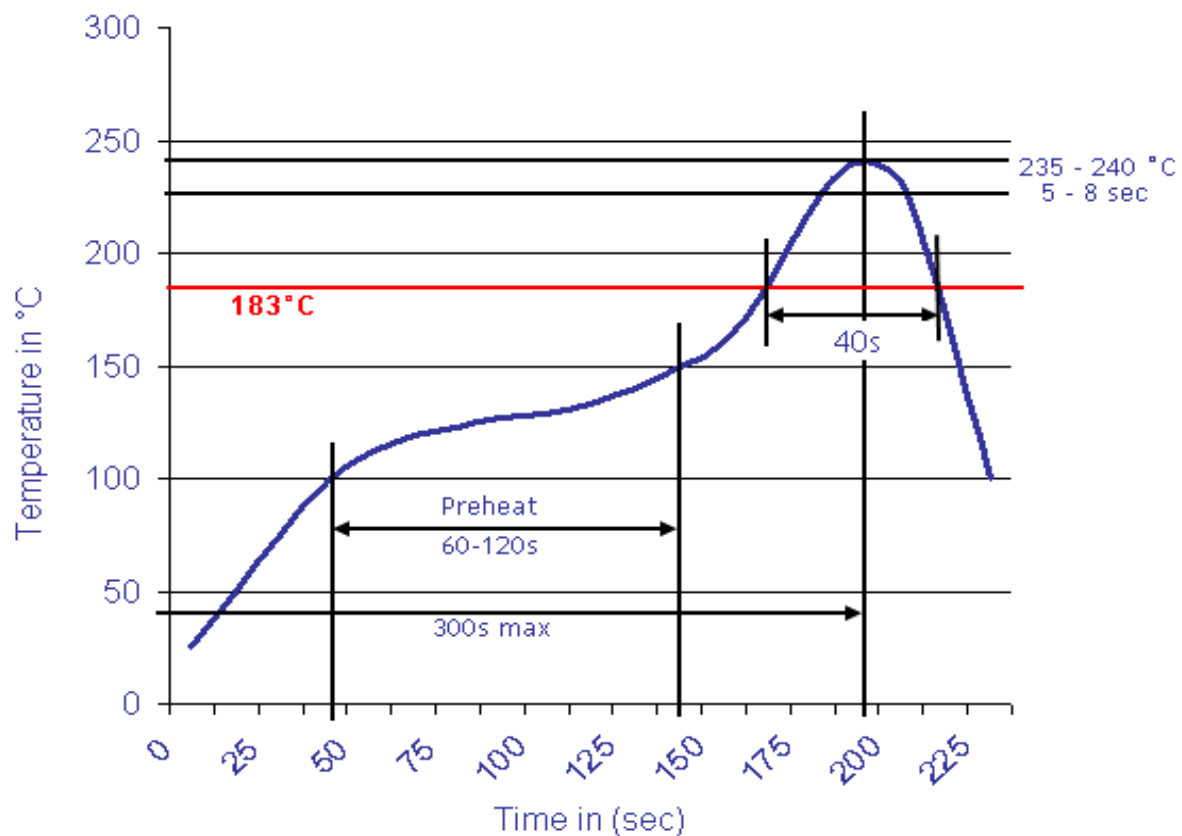

Wafer Serie T68Pxxxx Pitch
2,50mm

Part No.: **T68P038**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4		