



EDCON-COMPONENTS



Specifications

Voltage Rating:	250 V AC/DC
Current Rating:	3A AC/DC
Operating Temperature:	-25°C to +85°C
Contact Resistance:	10 mΩ
Withstanding Voltage:	1000 V AC/Minute
Insulation Resistance:	1000MΩ min.
Material Housing:	Nylon 66 / UL94V-0
Body Color:	Natural White



Drawing (dimensions all into mm)

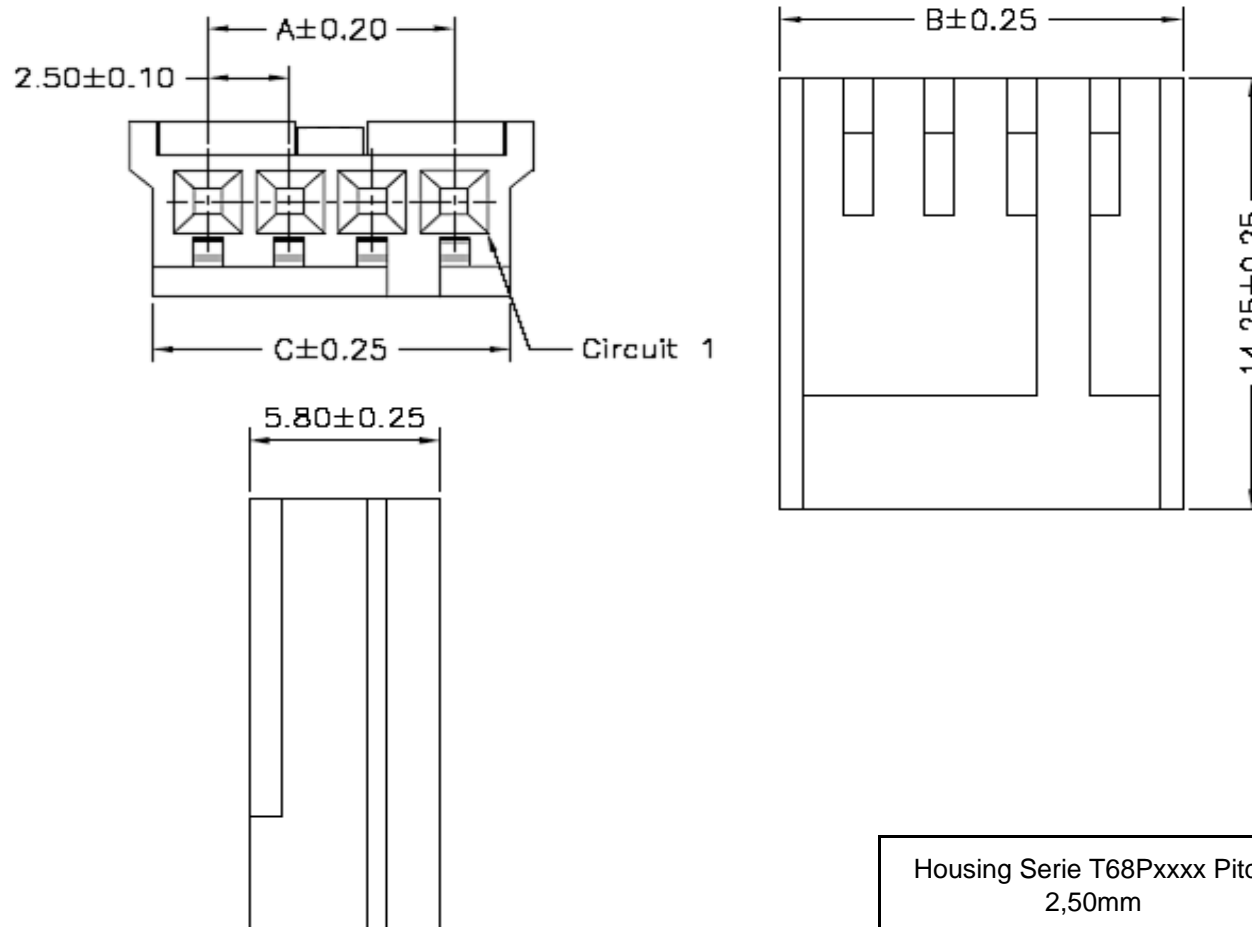

Housing Serie T68Pxxxx Pitch 2,50mm	
Part No.:	T68P058
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

EDCON-COMPONENTS

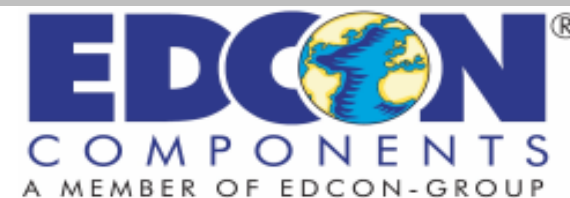

Dimension Information about Housing


Pos.	Dimension (mm)					
	A	B	C	D	E	F
2	2,50	7,25	5,90			
3	5,00	9,75	8,40			
4	7,50	12,25	10,90			
5	10,00	14,75	13,40			
6	12,50	17,25	15,90			
7	15,00	19,75	18,40			
8	17,50	22,25	20,90			
9	20,00	24,75	23,40			
10	22,50	27,25	25,90			
11	25,00	29,75	28,40			
12	27,50	32,25	30,90			
13	30,00	34,75	33,40			
14	32,50	37,25	35,90			
15	35,00	39,75	38,40			

Pos.	Dimension (mm)					
	A	B	C	D	E	F

Housing Serie T68Pxxxx Pitch 2,50mm	
Part No.:	T68P058
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Pos.	Color of Body	Packing							
-------	----------------	---------------	---------	--	--	--	--	--	--	--

T68P058	02	WH	BU							
----------------	-----------	-----------	-----------	--	--	--	--	--	--	--

xx = Pos.	WH= White	BU= Bulk Packing								

Housing Serie T68Pxxxx Pitch 2,50mm

Part No.: **T68P058**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

Customer: