




EDCON-COMPONENTS



Specifications

Voltage Rating:	250 V AC/DC
Current Rating:	3A AC/DC
Operating Temperature:	-25°C to + 85°C
Contact Resistance:	20 mΩ
Withstanding Voltage:	1000 V AC/Minute
Insulation Resistance:	100MΩ min.
Material Housing:	Nylon 66 / UL94V-0 Glass Fiber

Drawing (dimensions all into mm)

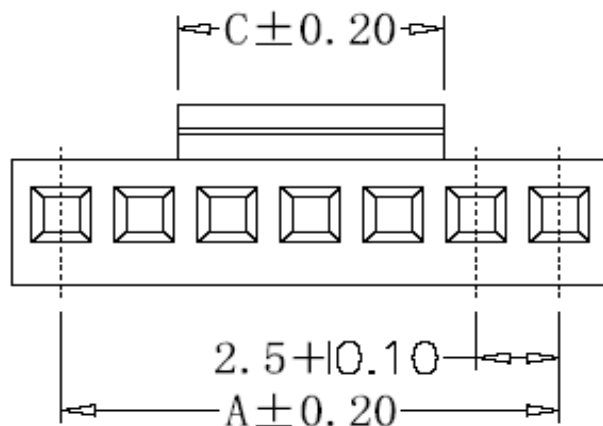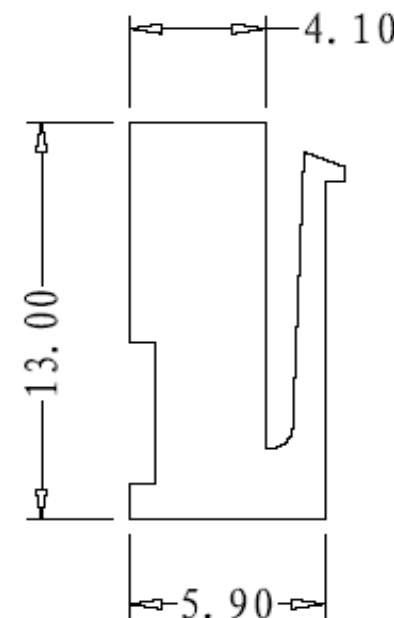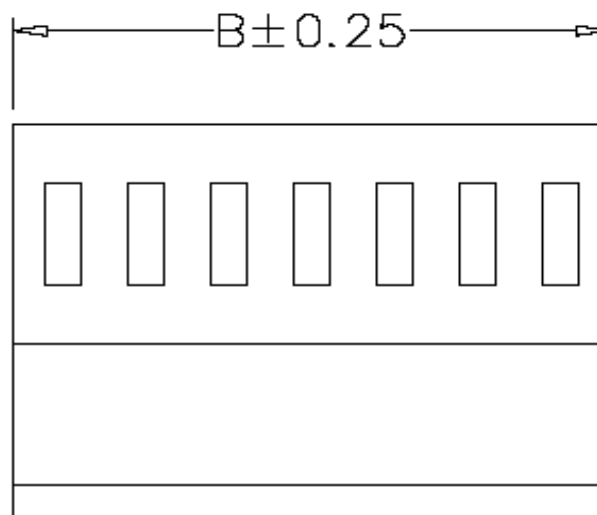


Housing Serie T68Pxxx Pitch
2,50mm

Part No.: **T68P070**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.05.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	



Dimension Information about Housing

Pos.	Dimension (mm)					
	A	B	C	D	E	F
2	2,50	5,50	2,00			
3	5,00	8,00	2,50			
4	7,50	10,50	5,00			
5	10,00	13,00	5,00			
6	12,50	15,50	6,00			
7	15,00	18,00	8,00			
8	17,50	20,50	10,00			
9	20,00	23,00	10,00			
10	22,50	25,50	10,00			
11	25,00	28,00	11,00			
12	27,50	30,50	11,00			
13	30,00	33,00	13,00			
14	32,50	35,50	13,00			
15	35,00	38,00	13,00			

Pos.	Dimension (mm)					
	A	B	C	D	E	F

Housing Serie T68Pxxx Pitch 2,50mm	
Part No.:	T68P070
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.05.2011
APPD:	Schumi			FINISH	Jamy			Sheet No.	2 from 3

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Pos.	Color of Body	ROHS	Packing						
T68P070	02	WH	R	BU						
	xx = Pos.	WH= White	R= Rohs Conform	BU= Bulk Ware						
			N= NON Rohs Conform							

Housing Serie T68Pxxx Pitch 2,50mm

Part No.: **T68P070**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.05.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

Customer: