


EDCON-COMPONENTS




Specifications






Voltage Rating:	125VAC /DC
Current Rating	1AC / DC
Operating Temperature	-25°C ~ +85°C
Contact Resistance	20m Ω max.
Withstanding Voltage	500V AC/minute
Insulation Resistance	100M Ω min.

Material Insulator:	Nylon 6T, UL94V-0
Material Pin	Brass
Pin Plating:	Gold plated 3μ
Solder Tabs:	Brass / tin plated
Color Body:	Natural / (Beige)

PCB Layout

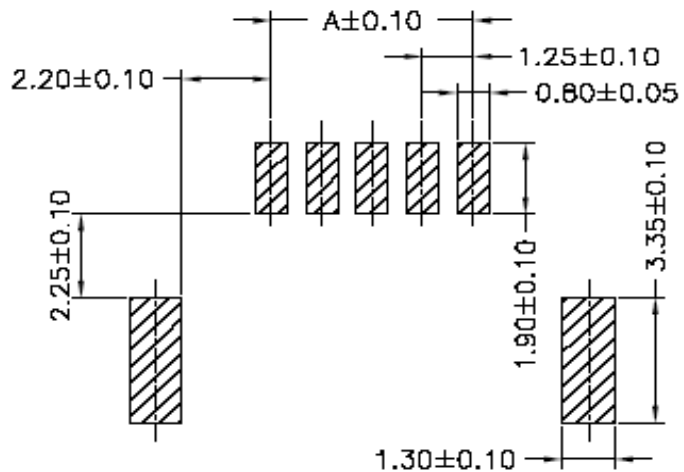

Drawing (dimensions all into mm)

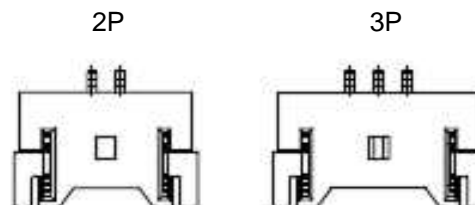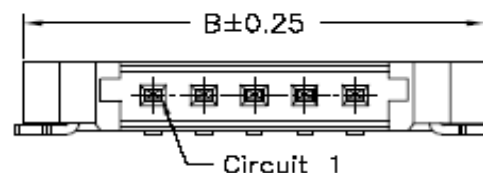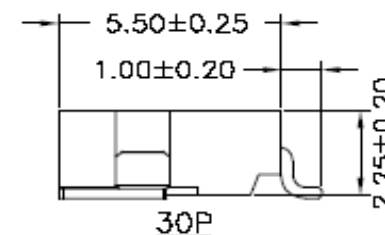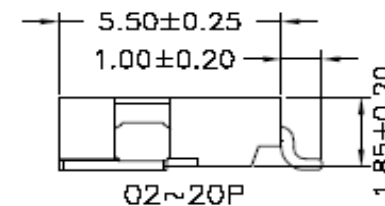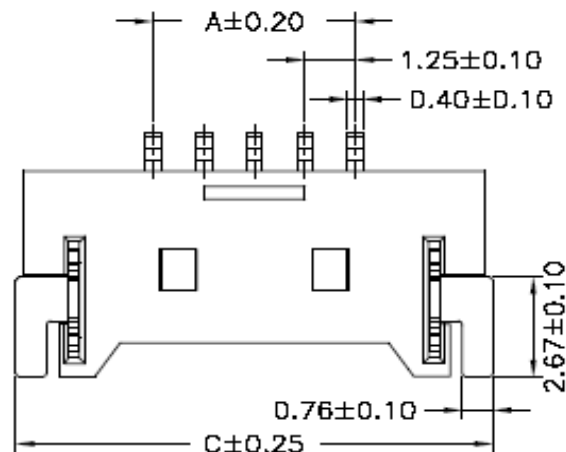


**Wire to Board Serie Pitch
1,25mm**

Part No.: **T68S003**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.12.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS




Ordering Informations

Serie	Positions	Body Color	C- Plating	ROHS	Packing				
T68S003	02	BK	TN	R	BU				

Look Table	BK= Black	TN= Tin Plated	R= ROHS Conform	BU= Bulk (Standard)
	NA= Natural	GF= Gold Flash	N= NON ROHS Conform	TU= Tube
	BG= Beige	GA= 3µGold		TR= Tape/Reel

Wire to Board Serie Pitch 1,25mm	
Part No.:	T68S003
Customer:	


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.12.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile

Lead Free Curve

Classification Reflow Profile (JEDEC J-STD-020C)

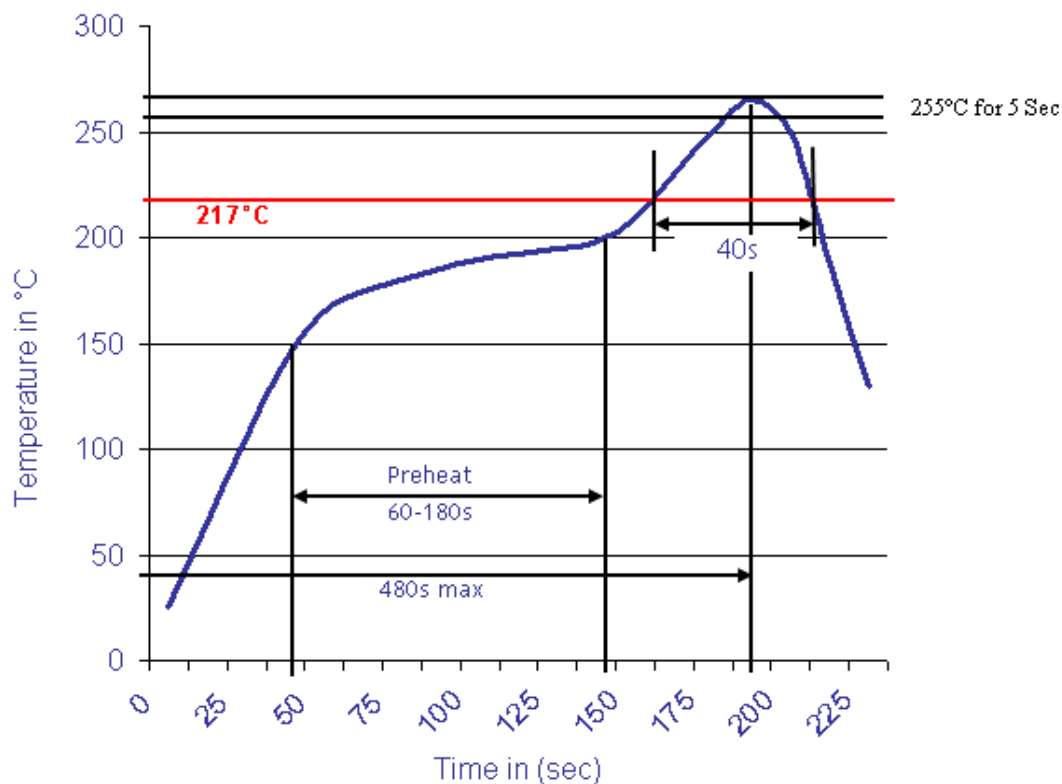

Wire to Board Serie Pitch 1,25mm	
Part No.:	T68S003
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.12.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	