



EDCON-COMPONENTS



Specifications



Voltage Rating:	125V AC/DC
Current Rating:	1A AC/DC
Operating Temperature:	-25°C to ~ +85°C
Contact Resistance:	20 mΩ max.
Withstanding Voltage:	500V AC/Minute
Insulation Resistance:	100MΩ min.
Applicable Wire:	
Applicable P.C.B:	
Applicable FPC/FFC:	
Solder Height:	
Crimp Tensile Strength:	
Material Housing:	Nylon 66 UL94V-0
Color of Housing:	Natural / Beige

Drawing (dimensions all into mm)

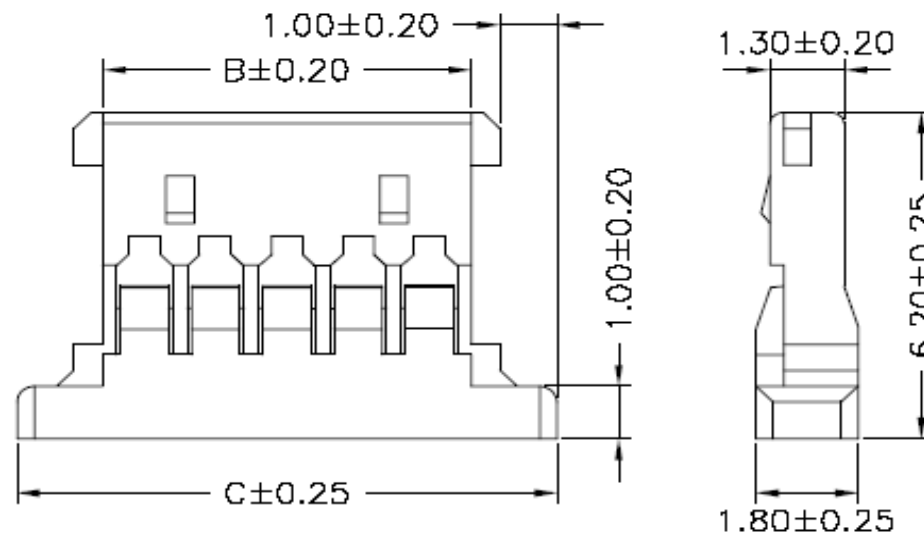

02P

03P

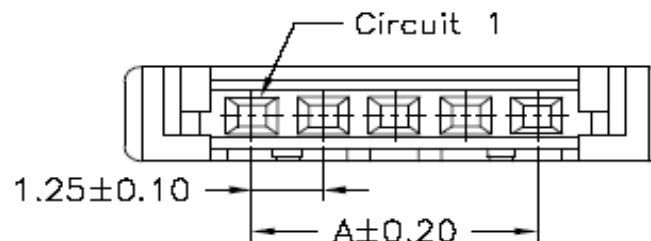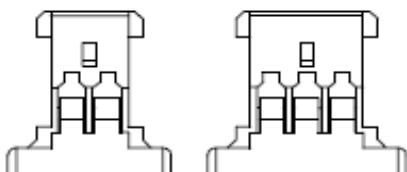


Housing Serie T68T004 Pitch
1,25mm

Part No.: **T68S004**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.12.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Pos.	Color of Body	Packing							
-------	----------------	---------------	---------	--	--	--	--	--	--	--

T68S004	02	WH	BU							
----------------	-----------	-----------	-----------	--	--	--	--	--	--	--

xx = Pos.	WH= White Standard	BU= Bulk Packing								
	BG= Beige MOQ									

Housing Serie T68T004 Pitch 1,25mm
Part No.: T68S004
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.12.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3