


EDCON-COMPONENTS






Specifications




| | |
|------------------------|--------------------|
| Voltage Rating: | 200 V AC/DC |
| Current Rating: | 1A AC/DC |
| Operating Temperature: | -25°C to +85°C |
| Contact Resistance: | 40 mΩ |
| Withstanding Voltage: | 500 V AC/Minute |
| Insulation Resistance: | 100MΩ min. |
| Material Housing: | Nylon 66 / UL94V-0 |
| Color Tone: | Black |

Drawing (dimensions all into mm)

5,7,9,11, Contacts

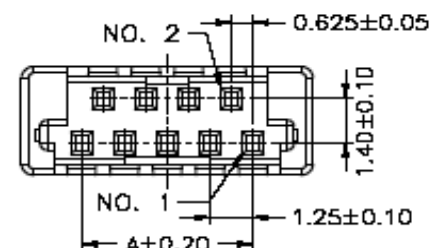

13,15,17,19,21,31,41 Contacts

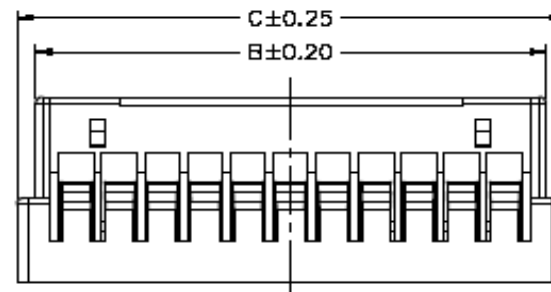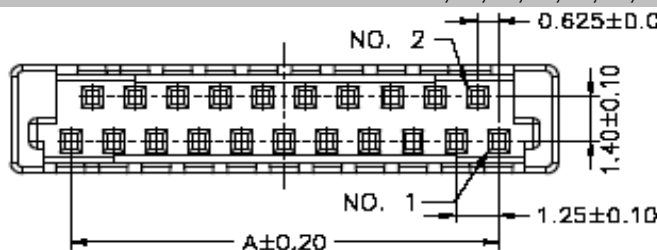


Housing Serie T68Sxxxx Pitch
1,25mm

Part No.: **T68S052**

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 02.04.2009 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 1 from 3 |

Customer:
email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

| Serie | Number of Pos. | Color of Body | Packing | | | | | | | |
|------------------|------------------|-------------------------|-----------|--|--|--|--|--|--|--|
| T68S052 | 05 | BK | BU | | | | | | | |
| xx = Pos. | BK= Black | BU= Bulk Packing | | | | | | | | |
| | | | | | | | | | | |

| |
|-------------------------------------|
| Housing Serie T68Sxxxx Pitch 1,25mm |
| Part No.: T68S052 |
| Customer: |

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 02.04.2009 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 3 from 3 |

www.edcon-components.com

email: info@edcon-components.com