



# EDCON-COMPONENTS






## Specifications

Voltage Rating:	200 V AC/DC
Current Rating:	1A AC/DC
Operating Temperature:	-25°C to +85°C
Contact Resistance:	40 mΩ
Withstanding Voltage:	500 V AC/Minute
Insulation Resistance:	100MΩ min.
Material Housing:	Nylon 6T / UL94V-0
Color:	Natural (Beige)
Pin-Material:	Bronze /Gold-Flash 3μ
Solder Tabs:	Bronze /Gold-Flash
Pic and Place Cap	6T UL94V-0

## Drawing ( dimensions all into mm)

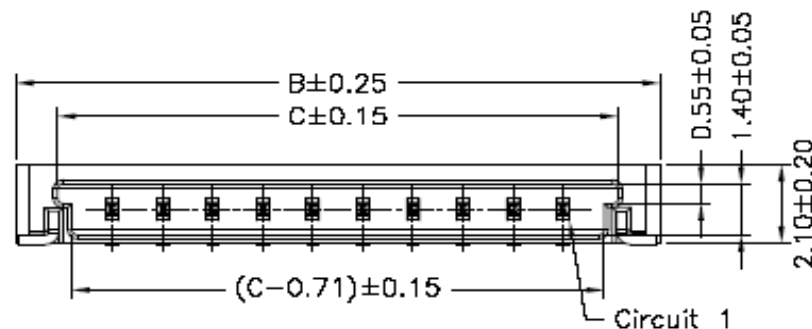

## P.C.B. Layout

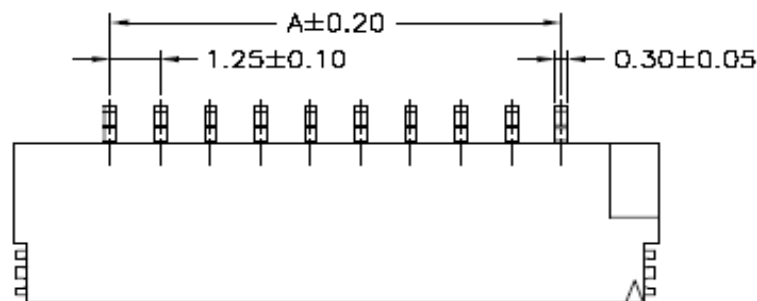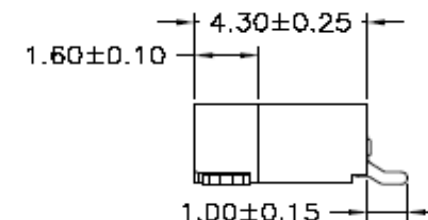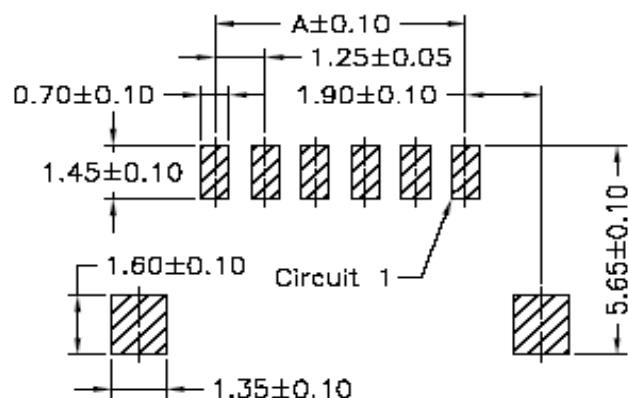

Wafer Serie T68Sxxxx Pitch  
1,25mm

Part No.: **T68S057**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	Customer:

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)



# EDCON-COMPONENTS



## Ordering Informations

Serie	Number of Pos.	Color of Body	Packing							
-------	----------------	---------------	---------	--	--	--	--	--	--	--

<b>T68S057</b>	<b>02</b>	<b>NA</b>	<b>TU</b>							
----------------	-----------	-----------	-----------	--	--	--	--	--	--	--


<b>xx = Pos.</b>	<b>NA= Natural</b>	<b>TU= Tube Packing</b>								
	<b>BG= Beige</b>	<b>TR= Tape / Reel Packing</b>								

Wafer Serie T68Sxxxx Pitch 1,25mm
Part No.: <b>T68S057</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy			Sheet No.	3 from 4


[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

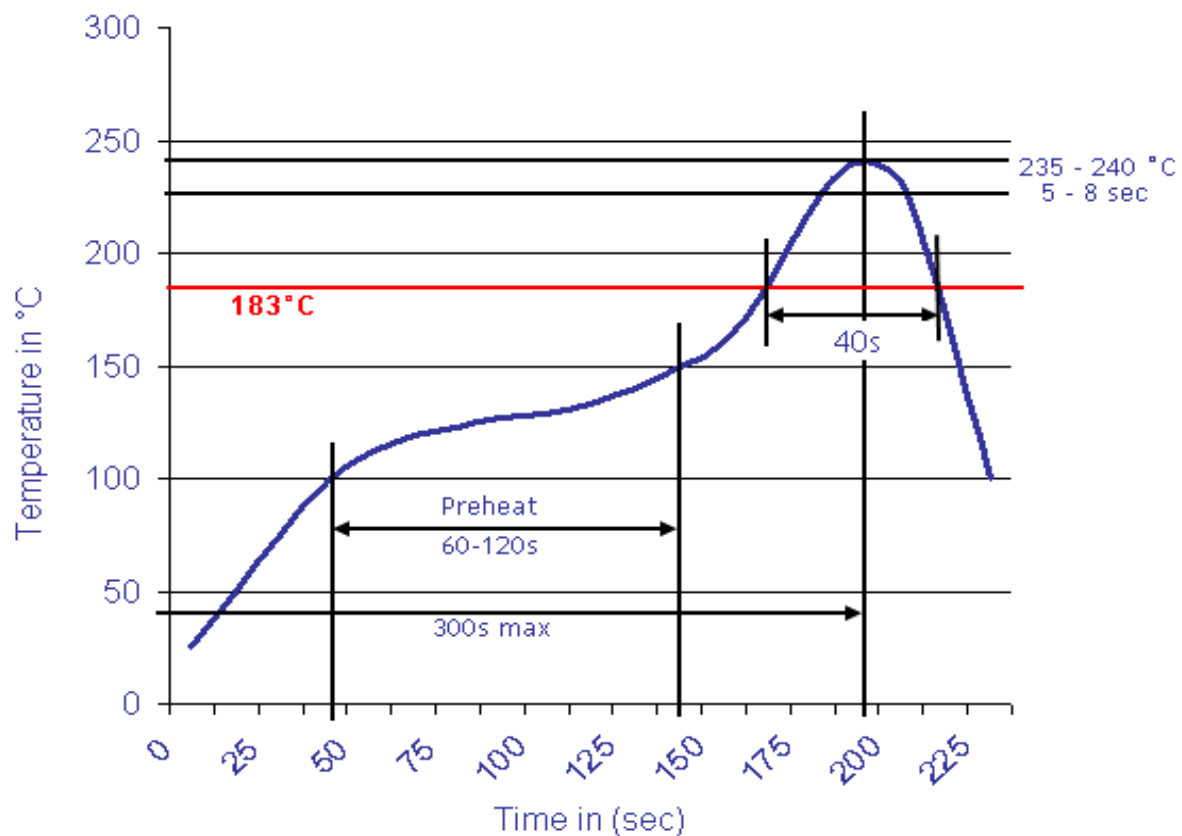

Wafer Serie T68Sxxxx Pitch  
1,25mm

Part No.: **T68S057**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	Customer: