


EDCON-COMPONENTS




Specifications


Voltage Rating:	150 V AC/DC
Current Rating:	1A AC/DC
Operating Temperature:	-25°C to +85°C
Contact Resistance:	30 mΩ
Withstanding Voltage:	500 V AC/Minute
Insulation Resistance:	500MΩ min.
Material Housing:	Nylon 6T / UL94V-0
Color:	Natural (Beige)
Pin-Material:	Brass /Tin-plated
Solder Tabs:	Brass /Tin-plated

Drawing (dimensions all into mm)



2Pol.





3Pol.



4 ~ 30P

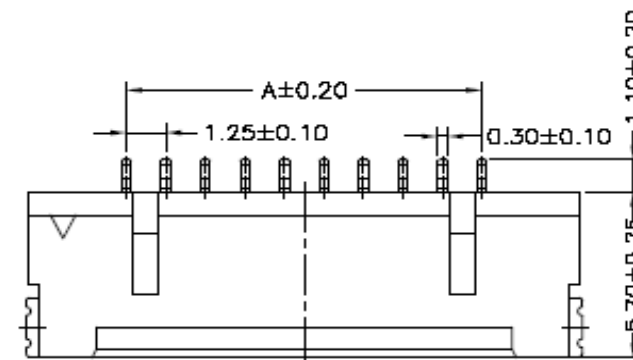

P.C.B. Layout

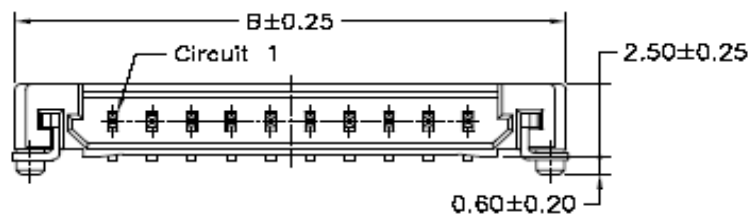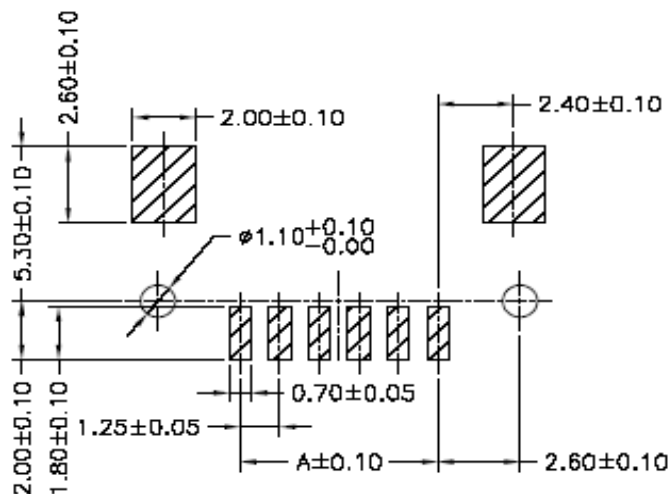

Wafer Serie T68Sxxxx Pitch
1,25mm

Part No.: **T68S301**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Pos.	Color of Body	Packing							
-------	----------------	---------------	---------	--	--	--	--	--	--	--

T68S301	02	NA	TU							
----------------	-----------	-----------	-----------	--	--	--	--	--	--	--


xx = Pos.	NA= Natural	TU= Tube Packing								
	BG= Beige	TR= Tape / Reel Packing								

Wafer Serie T68Sxxxx Pitch 1,25mm
Part No.: T68S301
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy			Sheet No.	3 from 4


www.edcon-components.com

email: info@edcon-components.com



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

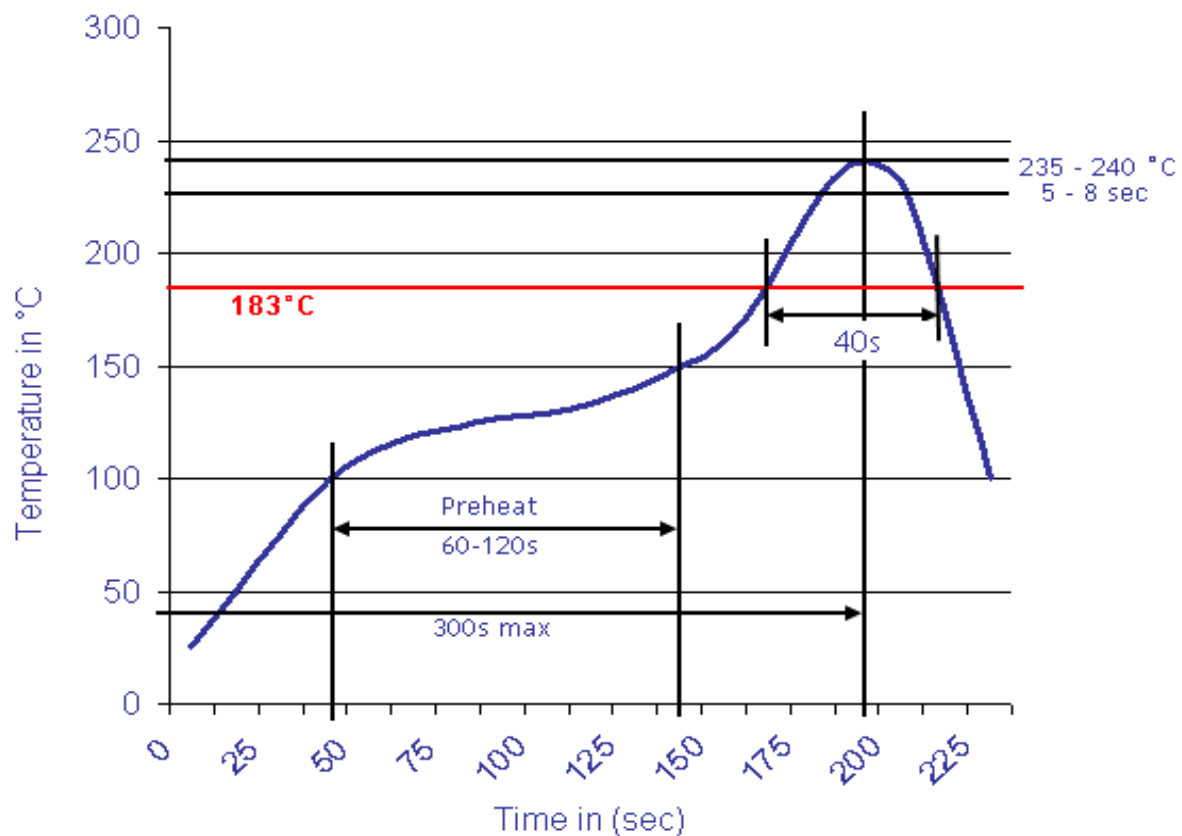

Wafer Serie T68Sxxxx Pitch
1,25mm

Part No.: **T68S301**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4		