



# EDCON-COMPONENTS






## Specifications

Voltage Rating:	125V AC,DC
Current Rating	2A AC/DC
Operating Temperature	. -25°C ~ + 85°C
Contact Resistance	20 milli Ohm max.
Withstanding Voltage	1000V AC/minute
Insulation Resistance	1000 M Ohm min.
Material Pin:	Phosphor Bronze
Contact Plating:	Tin or Gold Flash Plated


## Drawing ( dimensions all into mm)

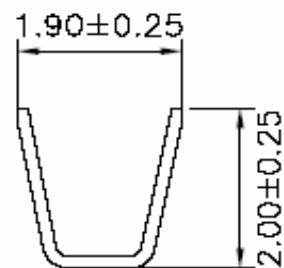

SEC:A-A

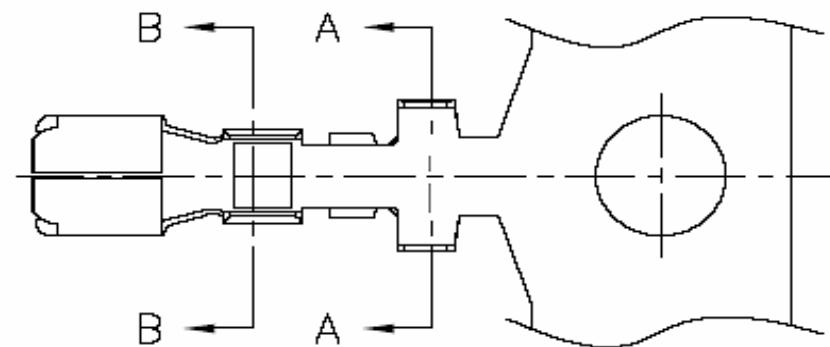

SEC:B-B

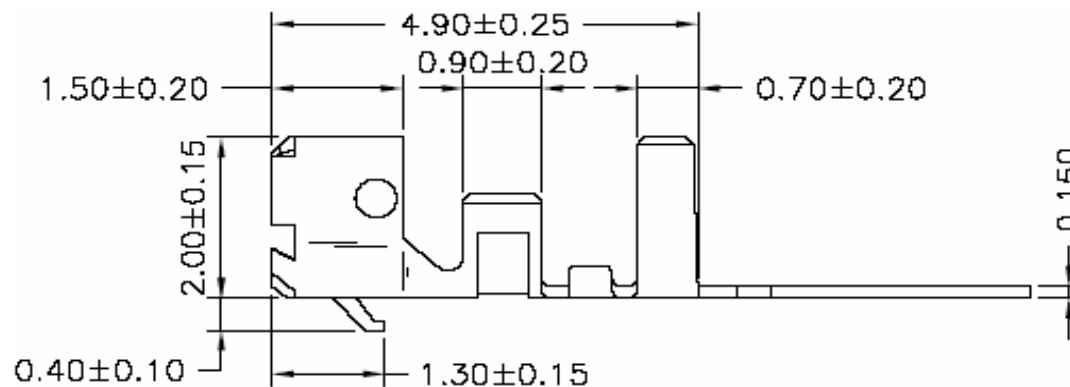

Terminal Pitch 2,00mm

Part No.: **T68T029**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



## Ordering Informations

Serie	Contact	Wire Size	Packing						
<b>T68T029</b>	<b>T</b>	<b>30</b>	<b>TR103</b>						

<b>T= Tin</b>	<b>30 = AWG 24~ 30</b>	<b>TR103=</b> Tape/Reel 10000PCS							
<b>G= Flash Gold</b>									

Terminal Pitch 2,00mm
Part No.: <b>T68T029</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2

[www.edcon-components.com](http://www.edcon-components.com)

email: info@edcon-components.com