





EDCON-COMPONENTS



Specifications

Voltage Rating:	250 V AC/DC
Current Rating:	3A AC/DC
Operating Temperature:	-25°C to + 85°C
Contact Resistance:	30 mΩ
Withstanding Voltage:	650 V AC/Minute
Insulation Resistance:	1000MΩ min.
Material Housing:	Nylon 66 / UL94V-0
Color:	Natural / (Black)

Drawing (dimensions all into mm)

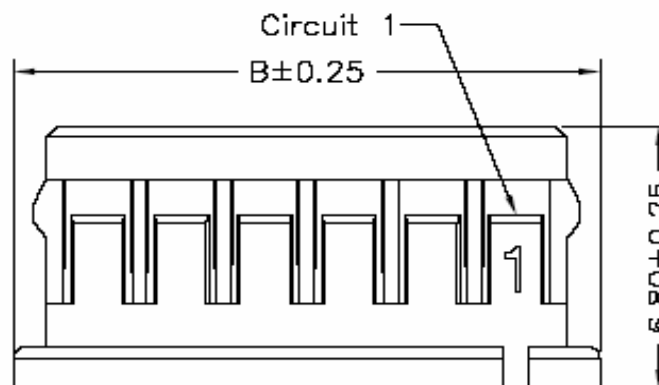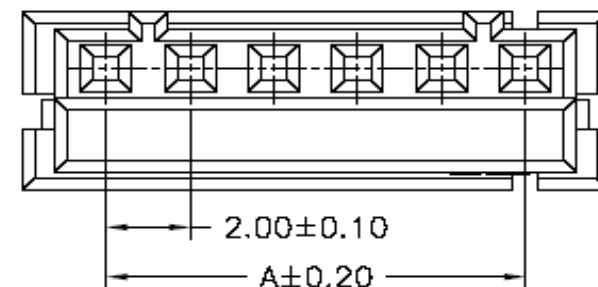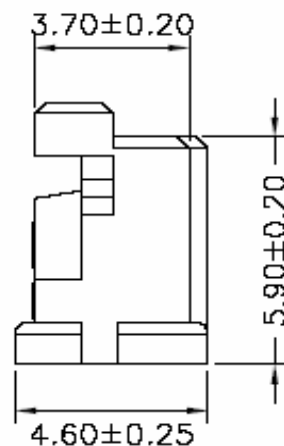


Housing Serie T68Txxxx Pitch 2,00mm	
Part No.:	T68T040
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Dimension Information about Housing


Pos.	Dimension (mm)					
	A	B	C	D	E	F
2	2,00	4,90				
3	4,00	6,90				
4	6,00	8,90				
5	8,00	10,90				
6	10,00	12,90				
7	12,00	14,90				
8	14,00	16,90				
9	16,00	18,90				
10	18,00	20,90				
11	20,00	22,90				
12	22,00	24,90				
13	24,00	26,90				
14	26,00	28,90				
15	28,00	30,90				

Pos.	Dimension (mm)					
	A	B	C	D	E	F

Housing Serie T68Txxxx Pitch 2,00mm
Part No.: T68T040
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Pos.	Color of Body	Packing							
-------	----------------	---------------	---------	--	--	--	--	--	--	--

T68T040	02	WH	BU							
----------------	-----------	-----------	-----------	--	--	--	--	--	--	--

xx = Pos.	WH= White	BU= Bulk Packing								

Housing Serie T68Txxxx Pitch 2,00mm

Part No.: **T68T040**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy			Sheet No.	3 from 3

Customer: