


EDCON-COMPONENTS




Specifications




Voltage Rating:	125 V AC/DC
Current Rating:	4A AC/DC
Operating Temperature:	-25°C to + 85°C
Contact Resistance:	10 mΩ
Withstanding Voltage:	1000 V AC/Minute
Insulation Resistance:	1000MΩ min.
Material Housing:	Nylon 66 / UL94V-0
Pin-Material:	Brass / Tin plated 100~150μ
Pantone Color of Base:	153C ~154C



Drawing (dimensions all into mm)

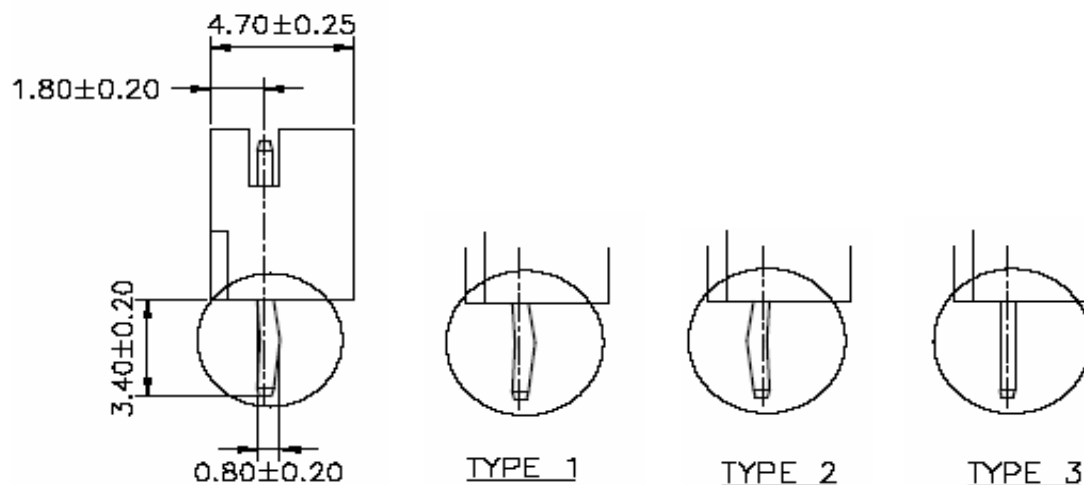

P.C.B. Layout

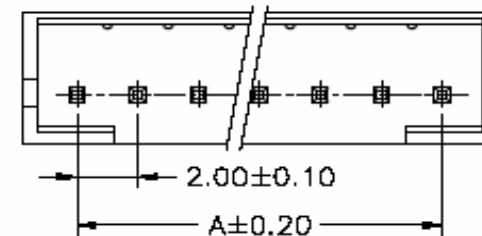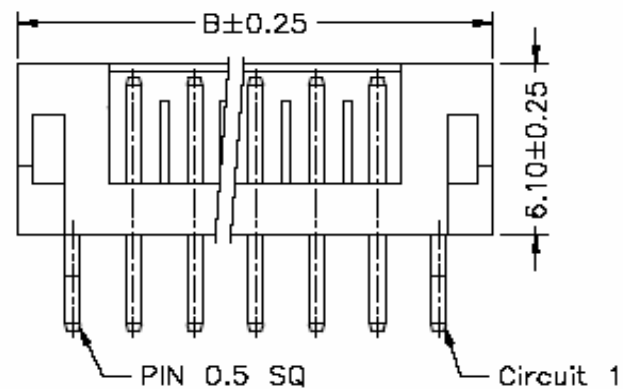


Wafer Serie T68Txxxx Pitch
2,00mm

Part No.: **T68T054**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS



Ordering Informations


Serie	Number of Pos.	Leg Function	Body Material	Color of Body	Packing					
-------	----------------	--------------	---------------	---------------	---------	--	--	--	--	--

T68T054	02	N	66	BN	BU					
----------------	-----------	----------	-----------	-----------	-----------	--	--	--	--	--

xx = Pos.	N= without Kink Type 3	66= Nylon 66	BN= Brown	BU= Bulk Ware						
	K= with King Type 1									
	L= with King Type 2									


Wafer Serie T68Txxxx Pitch 2,00mm
Part No.: T68T054
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

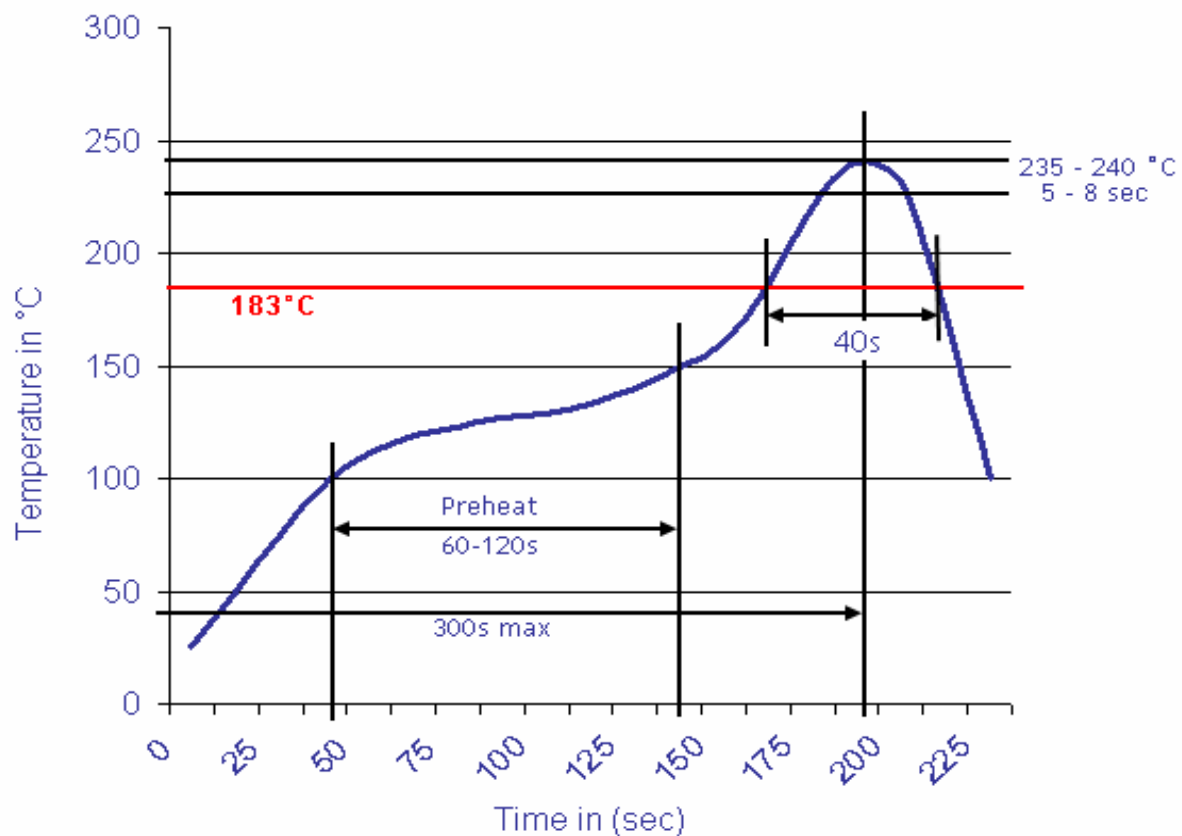

Wafer Serie T68Txxxx Pitch
2,00mm

Part No.: **T68T054**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4		