


# EDCON-COMPONENTS




## Specifications




Voltage Rating:	125 V AC/DC
Current Rating:	4A AC/DC
Operating Temperature:	-25°C to + 85°C
Contact Resistance:	10 mΩ
Withstanding Voltage:	1000 V AC/Minute
Insulation Resistance:	1000MΩ min.
Material Housing:	Nylon 66 / UL94V-0
Pin-Material:	Brass / Tin plated 100~150μ
Pantone Color of Base:	153C ~154C



## Drawing ( dimensions all into mm)

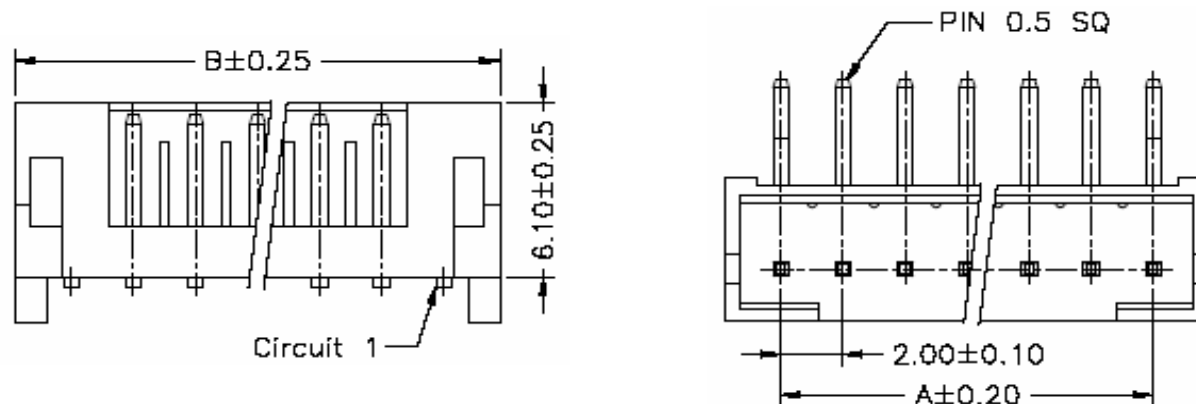

## P.C.B. Layout

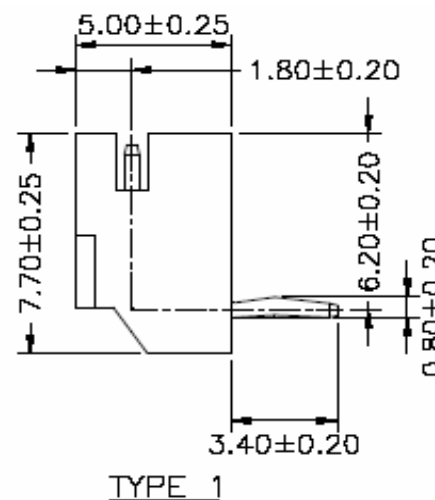


Wafer Serie T68T056 Pitch 2,00mm	
Part No.:	<b>T68T056</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.04.2012
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4



# EDCON-COMPONENTS



## Ordering Informations


Serie	Number of Pos.	Leg Function	Body Material	Color of Body	Packing					
-------	----------------	--------------	---------------	---------------	---------	--	--	--	--	--

<b>T68T056</b>	<b>02</b>	<b>N</b>	<b>66</b>	<b>BN</b>	<b>BU</b>					
----------------	-----------	----------	-----------	-----------	-----------	--	--	--	--	--

<b>xx = Pos.</b>	<b>N=</b> without Kink Type 2	<b>66=</b> Nylon 66	<b>BN=</b> Brown	<b>BU=</b> Bulk Ware						
	<b>K=</b> with King Type 1									


Wafer Serie T68T056 Pitch 2,00mm
Part No.: <b>T68T056</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.04.2012
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

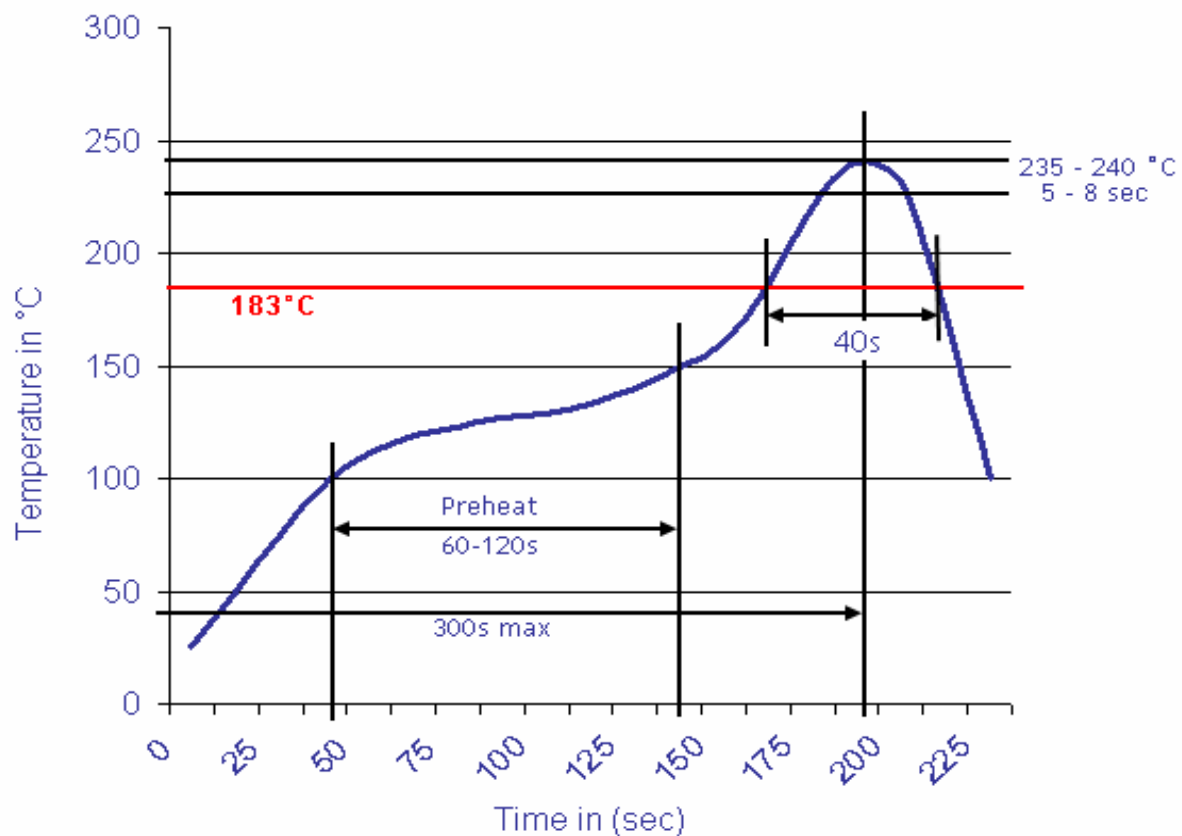

Wafer Serie T68T056 Pitch 2,00mm	
Part No.:	<b>T68T056</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.04.2012
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	