




EDCON-COMPONENTS





Specifications

Voltage Rating:	250 V AC/DC
Current Rating:	2A AC/DC
Operating Temperature:	-25°C to + 85°C
Contact Resistance:	30 mΩ
Withstanding Voltage:	800 V AC/Minute
Insulation Resistance:	1000MΩ min.
Material Housing:	Nylon 66 / UL94V-0
Pin-Material:	Brass / Tin Plated
Color of Base:	Black

Drawing (dimensions all into mm)

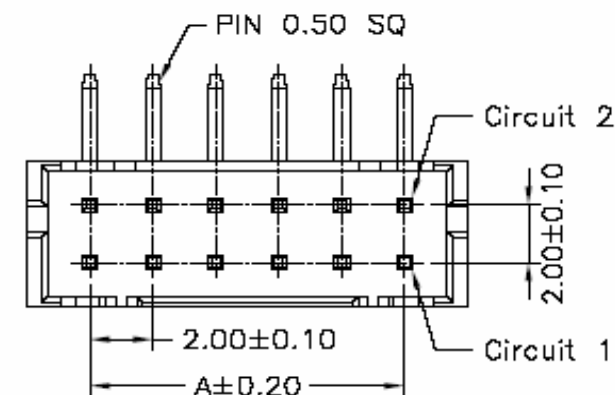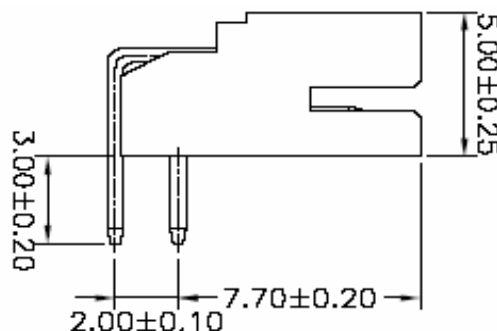

P.C.B. Layout

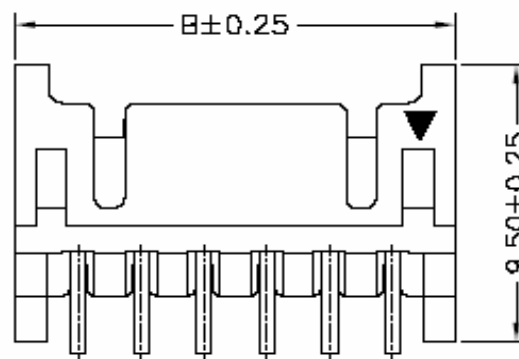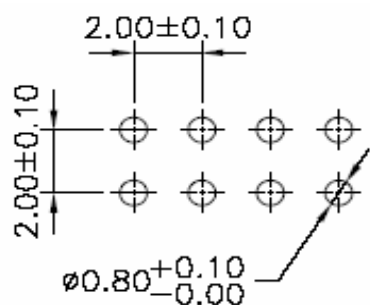


Wafer Serie T68Txxxx Pitch
2,00mm

Part No.: **T68T062**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS



Ordering Informations


Serie	Number of Pos.	Body Material	Color of Body	Packing						
-------	----------------	---------------	---------------	---------	--	--	--	--	--	--

T68T062	04	66	BK	BU						
----------------	-----------	-----------	-----------	-----------	--	--	--	--	--	--

xx = Pos.	66= Nylon 66	BK= Black	BU= Bulk Ware							


Wafer Serie T68Txxxx Pitch 2,00mm
Part No.: T68T062
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

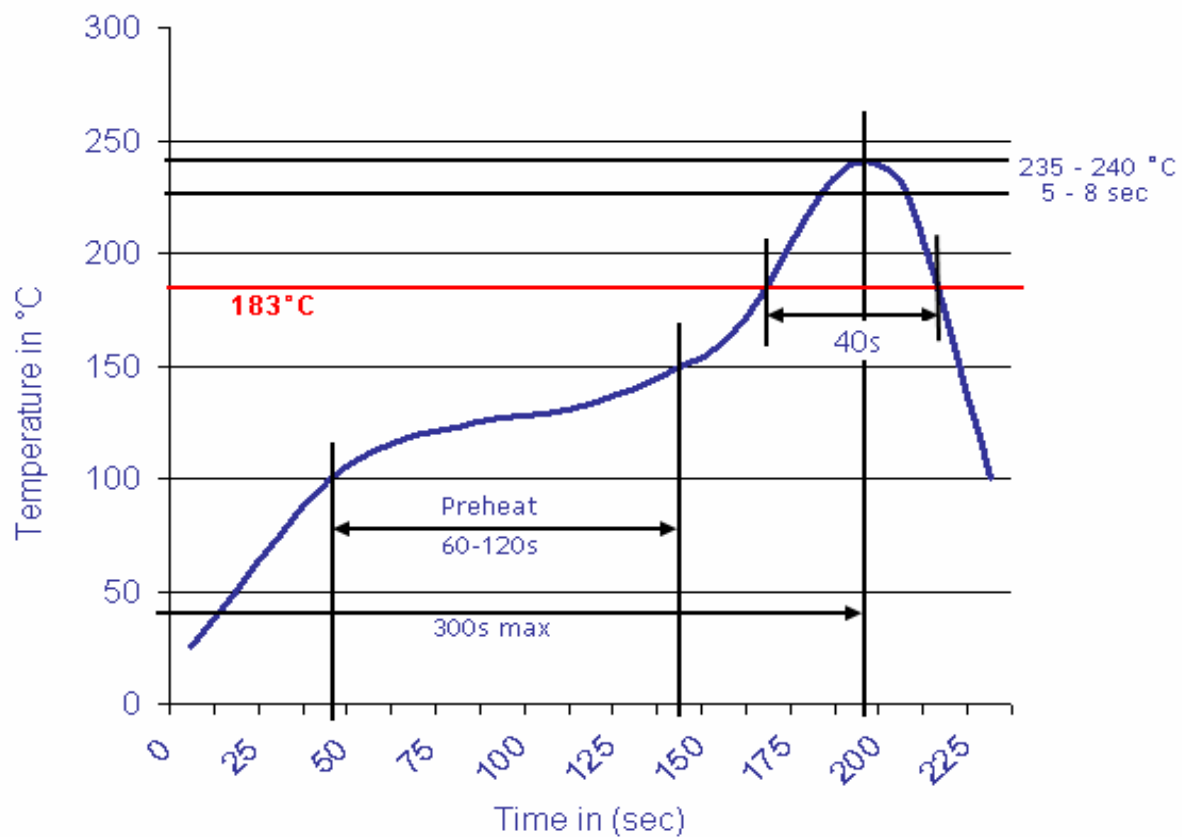

Wafer Serie T68Txxxx Pitch
2,00mm

Part No.: **T68T062**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	Customer: