




EDCON-COMPONENTS






Specifications

Voltage Rating:	100 V AC/DC
Current Rating:	2A AC/DC
Operating Temperature:	-25°C to +85°C
Contact Resistance:	10 mΩ
Withstanding Voltage:	500 V AC/Minute
Insulation Resistance:	1000MΩ min.
Material Housing:	Nylon 6T / UL94V-0
Color:	Natural (White)
Pin-Material:	Brass /Tin-plated

Drawing (dimensions all into mm)

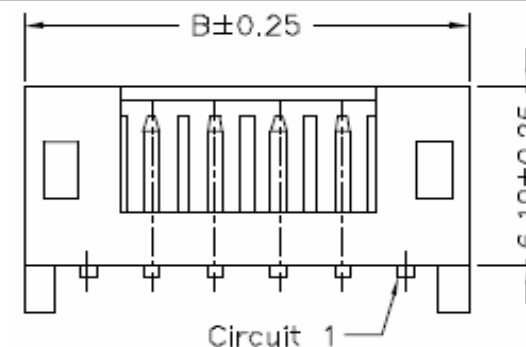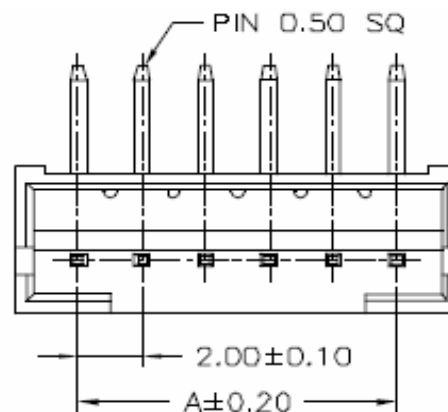

P.C.B. Layout

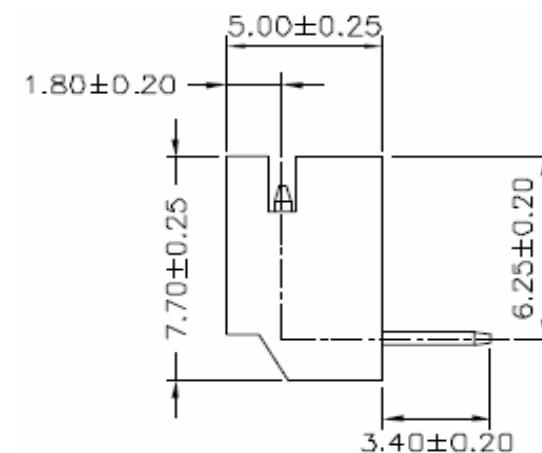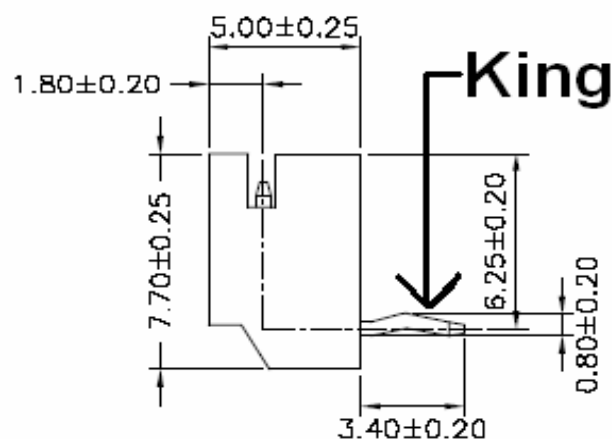


Wafer Serie T68Txxxx Pitch
2,00mm

Part No.: **T68T300**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Pos.	Leg function	Color of Body	Packing					
-------	----------------	--------------	---------------	---------	--	--	--	--	--

T68T300	02	N	WH	BU					
----------------	-----------	----------	-----------	-----------	--	--	--	--	--


xx = Pos.	N= without King	WH= White	BU= Bulk Ware					
	K= with King							

Wafer Serie T68Txxxx Pitch 2,00mm
Part No.: T68T300
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

www.edcon-components.com

email: info@edcon-components.com



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



Wafer Serie T68Txxxx Pitch
2,00mm

Part No.: **T68T300**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4		