


EDCON-COMPONENTS





Specifications



Voltage Rating:	250 V AC/DC
Current Rating:	3A AC/DC
Operating Temperature:	-25°C to + 85°C
Contact Resistance:	10 mΩ
Withstanding Voltage:	800 V AC/Minute
Insulation Resistance:	1000MΩ min.
Material Housing:	Nylon 66 / UL94V-0
Pin-Material:	Brass / Tin Plated
Pantone Color of Base:	7528C



Drawing (dimensions all into mm)

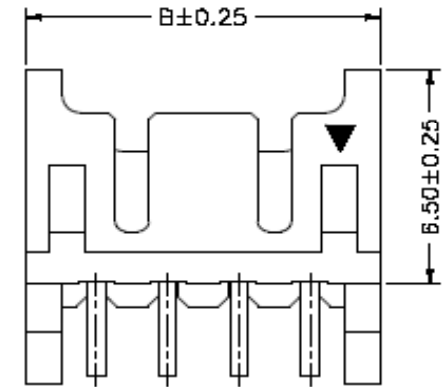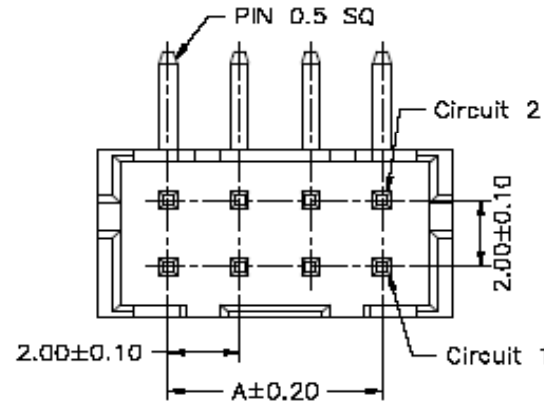

P.C.B. Layout

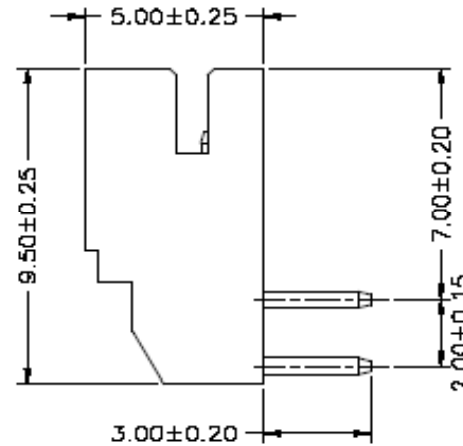


Wafer Serie T68T304 Pitch 2,00mm	
Part No.:	T68T304-
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations


Serie	Number of Pos.	Contact Plating	Special Function	Color of Body	Packing					
-------	----------------	-----------------	------------------	---------------	---------	--	--	--	--	--

T68T304-	04	TN	N	WH	BU					
-----------------	-----------	-----------	----------	-----------	-----------	--	--	--	--	--

xx = Pos.	TN= Tin Plated	N= no function	WH= White	BU= Bulk Ware						
	GF= gold flash		GY= Gray							


Wafer Serie T68T304 Pitch 2,00mm
Part No.: T68T304-
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

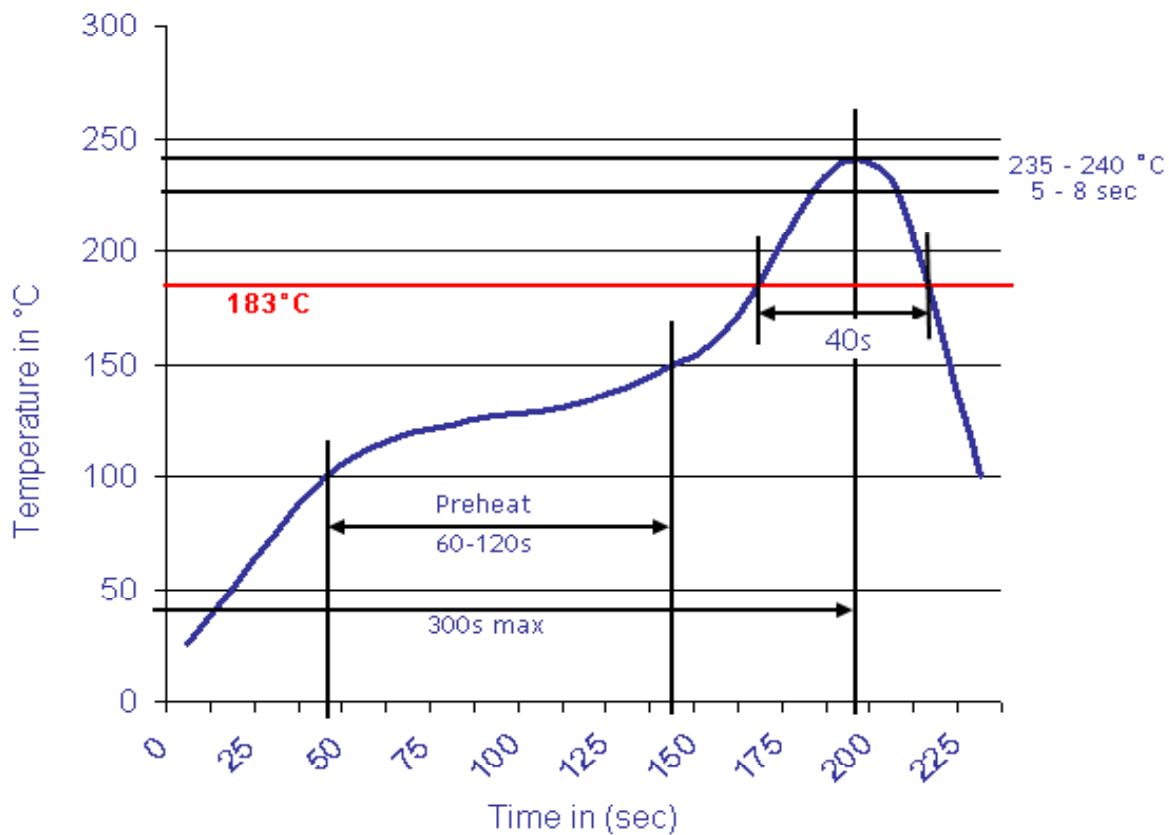

Wafer Serie T68T304 Pitch 2,00mm
Part No.: T68T304-
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 4