


EDCON-COMPONENTS

**Glass Passivated Single-Phase Bridge Rectifiers Reverse Voltage 50 to 1000 Volts
Forward Current 4.0 Amperes**



**KBJ4AU thru
KBJ4MU**

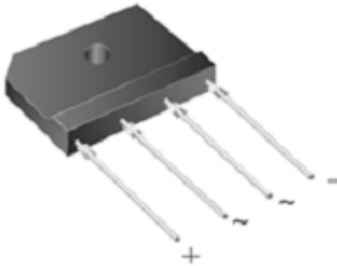

- Ideal for printed circuit boards
- High surge current capability
- High case dielectric strength of 2000 V_{RMS}
- Glass passivated chip junction
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbols	KBJ4AU	KBJ4BU	KBJ4DU	KBJ4GU	KBJ4JU	KBJ4KU	KBJ4MU	Units
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified output current at T _C =100°C T _A =25°C	I _{F(AV)}					4.0 ⁽¹⁾ 2.3 ⁽²⁾			Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}					120			Amps
Rating for fusing (t<8.3ms)	I _t					60			A ² sec
Maximum instantaneous forward voltage drop per leg at 2.0A	V _F					1.0			Volt
Maximum DC reverse current at rated DC blocking voltage per leg T _A =25°C T _A =125°C	I _R					5 250			µA
Typical thermal resistance per leg	R _{thJA} R _{thJC}					26 ⁽²⁾ 5 ⁽¹⁾			°C/W
Dielectric strength (Terminals to case, AC 1 minute)	V _{ISO}					2000			Volts
Operating junction and storage temperature range	T _J , T _{STG}					-55 to +150			°C

Notes:

1. Unit case mounted on 6.3x6.3x0.15cm thick Al plate heatsink
2. Units mounted on P.C.B. with 0.5 x 0.5" (13 x 13 mm) copper pads and 0.375" (9.5 mm) lead length
3. Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw


Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for Monitor, TV, Printer, Switching Mode Power Supply, Adapter, Audio equipment, and Home Appliances applications


Single In Line higher peak forward current

EDCON-COMPONENTS

Glass Passivated Single-Phase Bridge Rectifiers Reverse Voltage 50 to 1000 Volts
Forward Current 4.0 Amperes

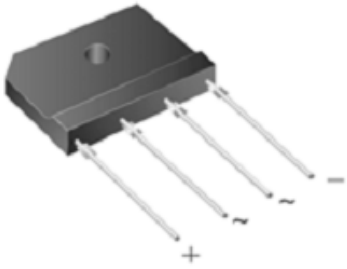


Technical Drawing

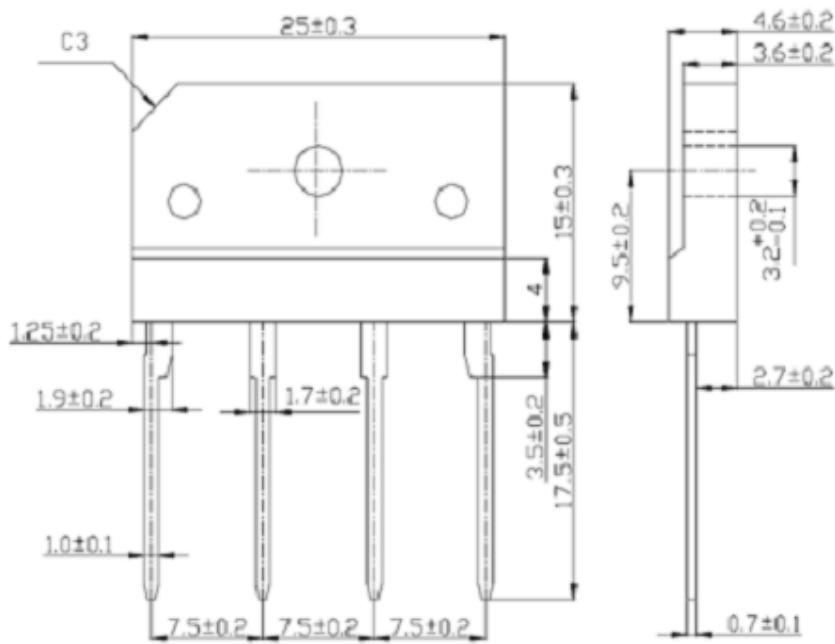

Dimensions in millimeter

Mechanical Data



- Case: KBJ(3S) Epoxy meets UL-94V-0 Flammability rating
- Terminals: Plated leads solderable per MIL-STD-750, Method 2026
- High temperature soldering guaranteed: 260 °C/10 seconds, 0.375 (9.5mm) lead length, 5lbs.(2.3kg) tension
- Polarity: As marked on body
- Mounting Torque: 10 cm-kG (8.8 inches-lbs) max.
- Recommended Torque: 5.7 cm-kG (5 inches-lbs)

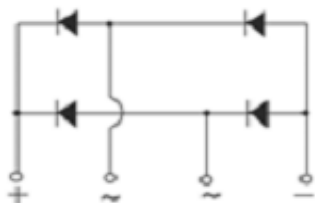

Single In Line higher peak forward current

EDCON-COMPONENTS

Glass Passivated Single-Phase Bridge Rectifiers Reverse Voltage 50 to 1000 Volts
Forward Current 4.0 Amperes

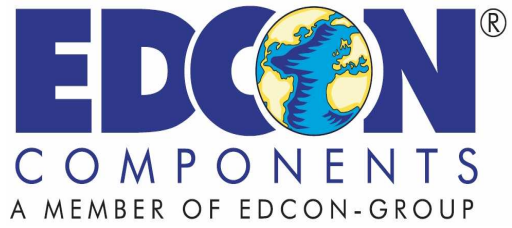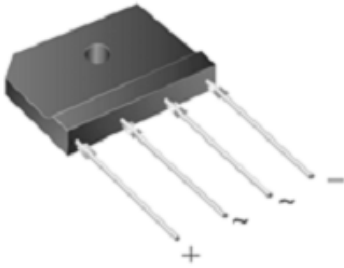

Ratings and characteristic curve

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

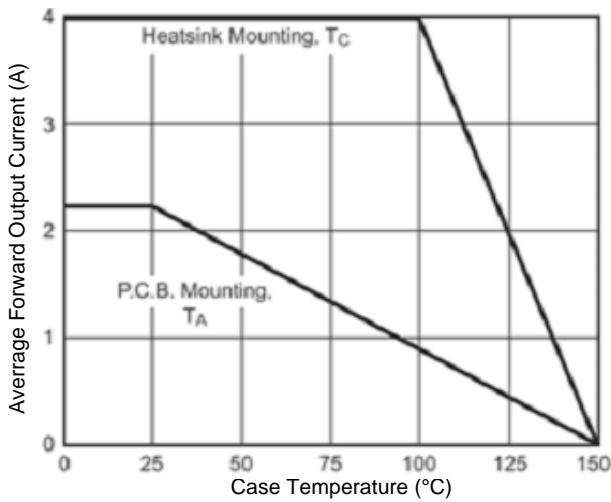


Figure 1. Derating Curve Output Rectified Current

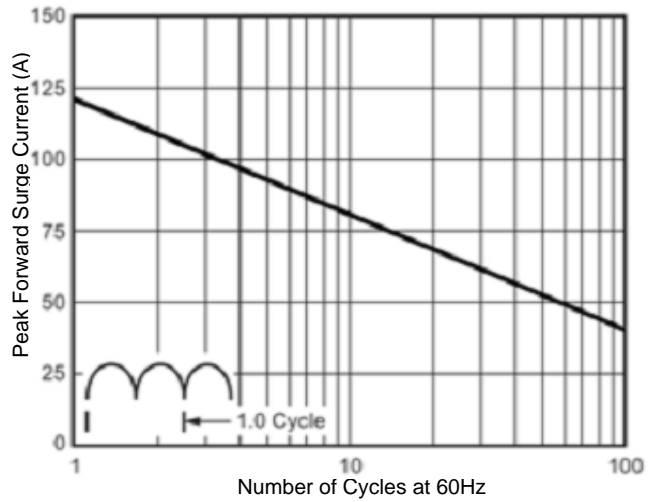


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

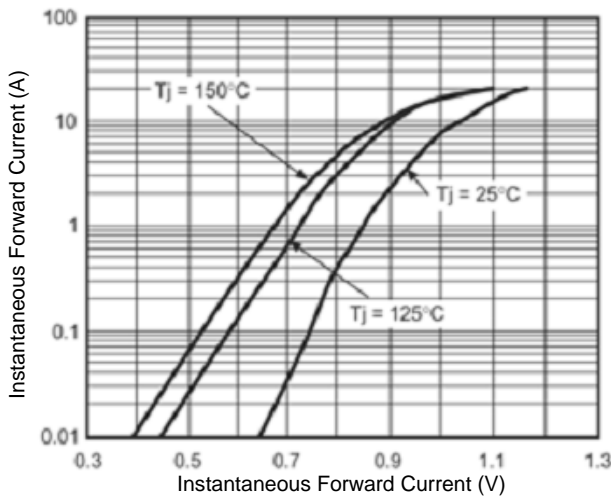


Figure 3. Typical Instantaneous Forward Characteristics Per Leg

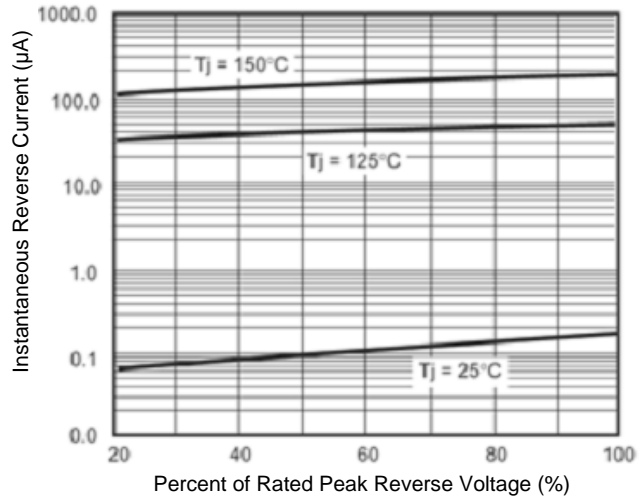


Figure 4. Typical Reverse Characteristics Per Leg

Single In Line higher peak forward current

EDCON-COMPONENTS

Glass Passivated Single-Phase Bridge Rectifiers Reverse Voltage 50 to 1000 Volts
Forward Current 4.0 Amperes

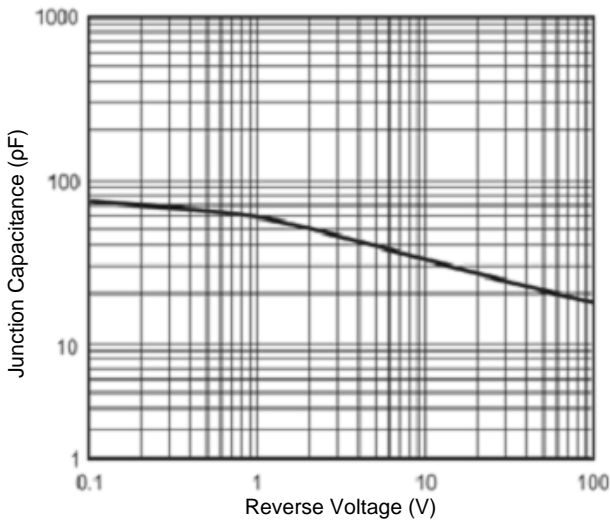
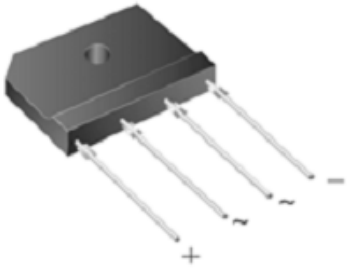


Figure 5. Typical Junction Capacitance Per Leg

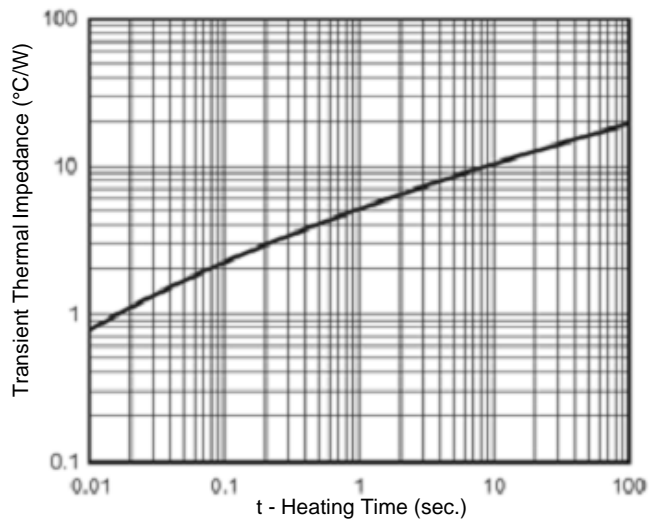


Figure 6. Typical Transient Thermal Impedance Per Leg

Single In Line higher peak forward current

Ordering Information

Serie					
E13001	KBJA4	TU			
	KBJ4AU	TR = Tape reel			
	KBJ4BU				
	KBJ4DU	TU = Tube			
	KBJ4GU				
	KBJ4JU				
	KBJ4KU				
	KBJ4MU				

