


EDCON-COMPONENTS








Specifications

Voltage Rating: 250VAC /DC
 Current Rating 4,0AC / DC
 Operating Temperature . -40°C ~ +130°C
 Contact Resistance 20m Ω Max.
 Withstanding Voltage 1000V AC/minute
 Insulation Resistance 1000M Ω Min.

Material Insulator: Nylon UL94V-2
 Material Pin Phosphor Bronze
 Applicable Wire: AWG 24~18
 Standard Color: Natural

Drawing (dimensions all into mm)

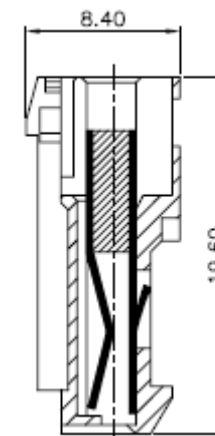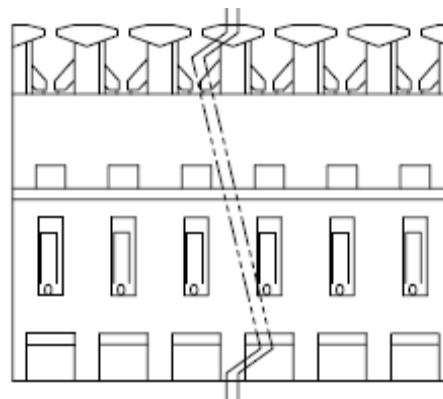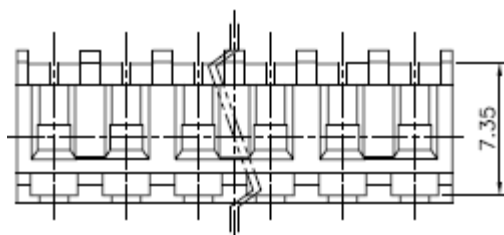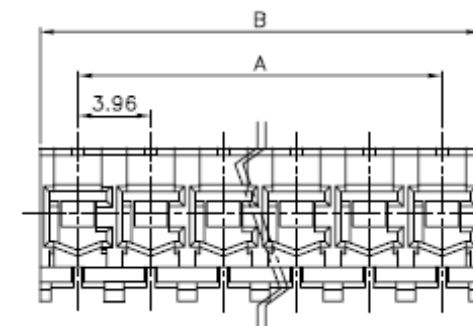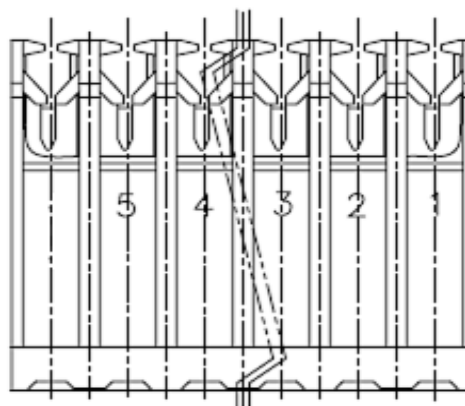

**Wire to Board Pitch 3,96mm
Alternative to Serie MASCONN**

Part No.: **T68J005**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Positions	Body Color	AWG-xx	C- Plating	ROHS	Packing				
T68J005	02	NA	18	TN	R	BU				

Look Table	NA= Natural (Standard)	18= AWG18	TN= Tin Plated	R= ROHS Conform	BU= Bulk (Standard)
	BK= Black (MOQ)	20= AWG20		N= NON ROHS Conform	
	WH= White (MOQ)	22= AWG22			
	RD= Red (MOQ)	24= AWG24			
	BL= Blue (MOQ)				
	YE= Yellow (MOQ)				

Wire to Board Pitch 3,96mm	
Alternative to Serie MASCONN	
Part No.:	T68J005
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	