



EDCON-COMPONENTS



Specifications

	UL	CSA	TUV
Voltage Rating:	300V	250V	250V
Current Rating	8.3A AC/DC	6A AC/DC	7A AC/DC
Operating Temperature	-40°C ~ +130°C		
Contact Resistance	20m Ω Max.		
Withstanding Voltage	1000V AC/minute		
Insulation Resistance	1000M Ω Min.		
Material Insulator:	Nylon 66 UL94V-0 White		

Drawing (dimensions all into mm)

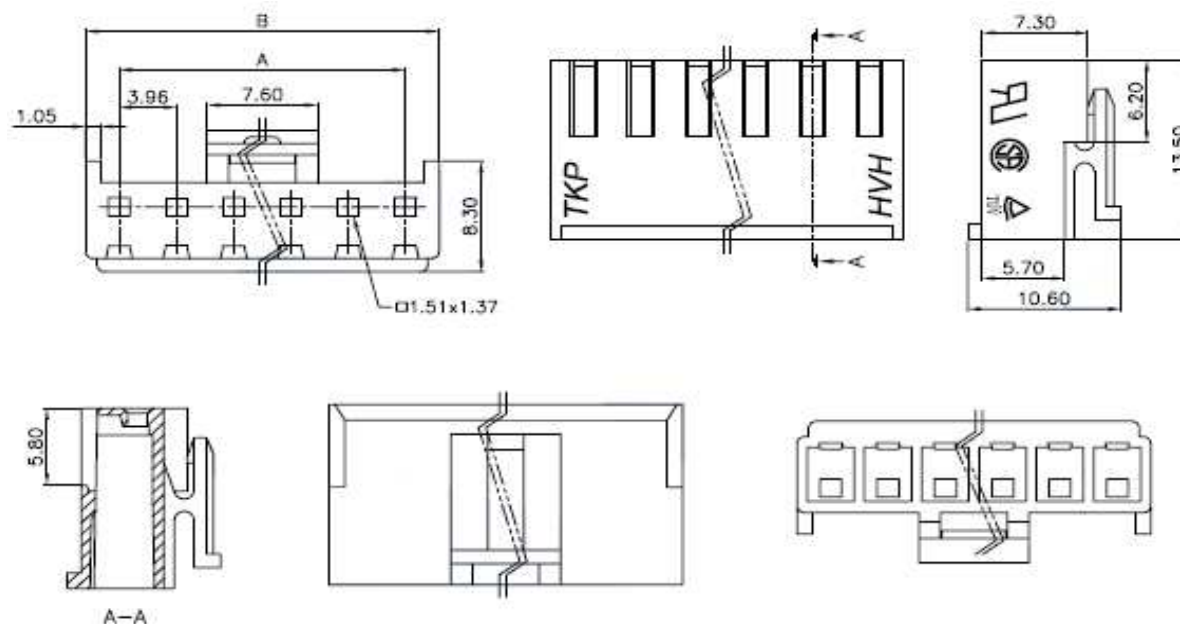

PCB Layout

Wire to Board Pitch 3,96mm

Part No.: T68J009

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4		

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Positions	Body Color	C- Plating	ROHS	Packing					
T68J009	02	WH	TN	R	BU					


Look Table	WH= White (Standard)	TN= Tin Plated	R= ROHS Conform	BU= Bulk (Standard)
	BK= Black (MOQ)		N= NON ROHS Conform	

Wire to Board Pitch 3,96mm

Part No.: **T68J009**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4


Customer:



Soldering Profile

Lead Free Curve

Classification Reflow Profile (JEDEC J-STD-020C)

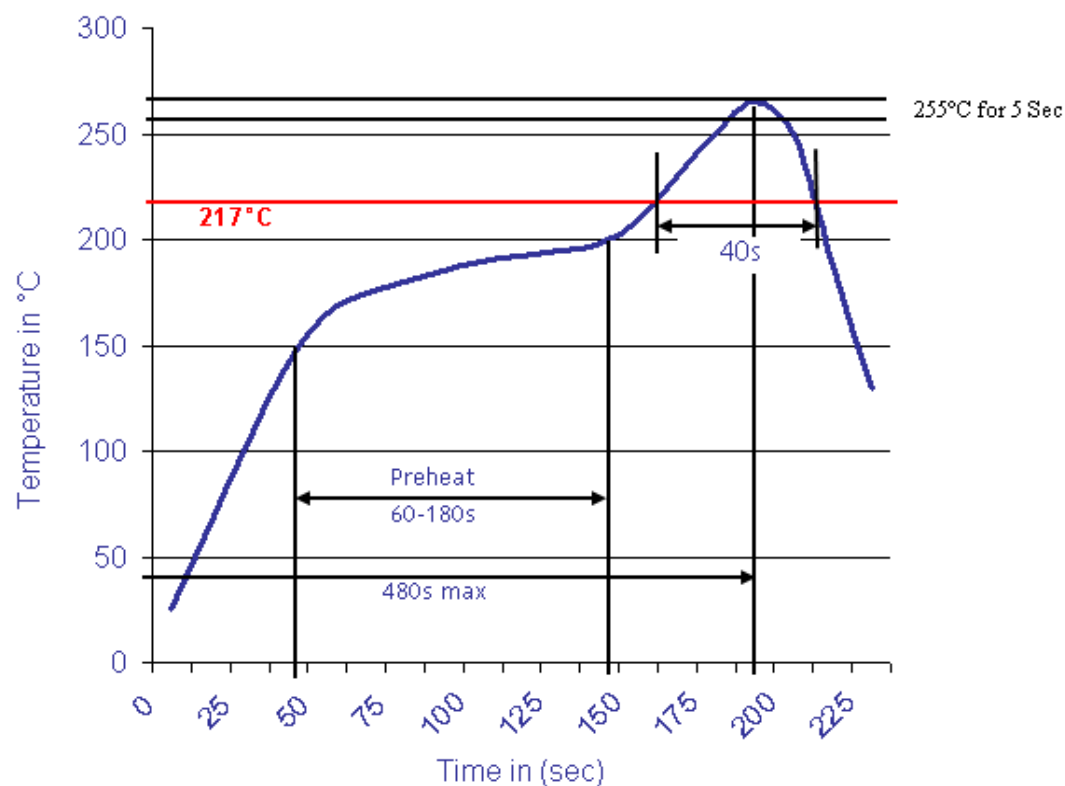

Wire to Board Pitch 3,96mm

Part No.: **T68J009**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4		