


EDCON-COMPONENTS






Specifications

Voltage Rating:	250VAC /DC
Current Rating	3,0AC / DC
Operating Temperature	. -40°C ~ +130°C
Contact Resistance	20m Ω Max.
Withstanding Voltage	1000V AC/minute
Insulation Resistance	1000M Ω Min.

Material Insulator:	Nylon UL94V-2
Material Pin	Phosphor Bronze
Applicable Wire:	AWG 28~22
Standard Color:	Natural other available

Drawing (dimensions all into mm)

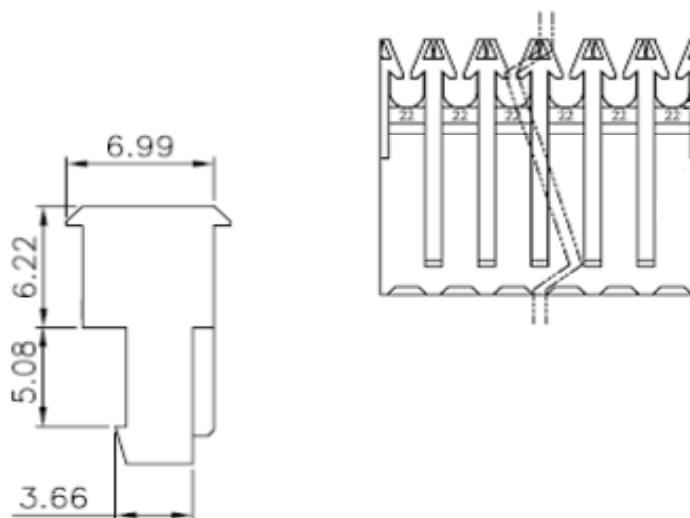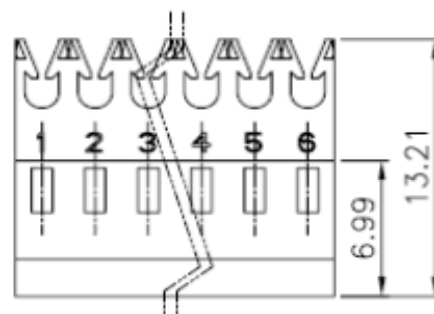


Wire to Board Pitch 2,54mm
Alternative to Serie MASCONN

Part No.: **T68N019-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.03.2024
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

Customer:

EDCON-COMPONENTS



Dimension Informations about Wafer

Pos.	Dimension (mm)				
	B	A			
02	2,54	5,08			
03	5,08	7,62			
04	7,62	10,16			
05	10,16	12,70			
06	12,70	15,24			
07	15,24	17,78			
08	17,78	20,32			
09	20,32	22,86			
10	22,86	25,40			
11	25,40	27,94			
12	27,94	30,48			
13	30,48	33,02			
14	33,02	35,56			
15	35,56	38,10			
16	38,10	40,64			
17	40,64	43,18			
18	43,18	45,72			
19	45,72	48,26			
20	48,26	50,80			
21	50,80	53,34			
22	53,34	55,88			
23	55,88	58,42			
24	58,42	60,96			


Pos.	Dimension (mm)				

Wire to Board Pitch 2,54mm	
Alternative to Serie MASCONN	
Part No.:	T68N019-
Customer:	

DRW:	Jason	CHKD:	Wilson	MATL:	Wilson	TOLERANCE:	Mason	DATE:	20.03.2024
APPD:	Schumi	FINISH:	Jamy			Sheet No.			2 from 3



EDCON-COMPONENTS



Ordering Informations

Serie	Positions	Body Color	Wire Size	C- Plating	ROHS	Packing				
T68N019-	02	NA	00	TN	R	BU				

Look Table	GN= Green	28= AWG28	TN= Tin Plated	R= ROHS Conform	BU= Bulk (Standard)
	BL= Blue	28= AWG28	GF= Gold Flash Plated	N= NON ROHS Conform	
	NA= Natural	26= AWG26			
	RD= Red	24= AWG24			
	BK= Black	22= AWG22			

Wire to Board Pitch 2,54mm Alternative to Serie MASCONN	
Part No.:	T68N019-
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.03.2024
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3