


EDCON-COMPONENTS








Specifications

Voltage Rating: 250VAC /DC
 Current Rating 2,0AC / DC
 Operating Temperature . -40°C ~ +130°C
 Contact Resistance 20m Ω Max.
 Withstanding Voltage 1000V AC/minute
 Insulation Resistance 1000M Ω Min.

Material Insulator: Nylon UL94V-2
 Material Pin Phosphor Bronze
 Applicable Wire: AWG 28~22
 Standard Color: Natural

Drawing (dimensions all into mm)

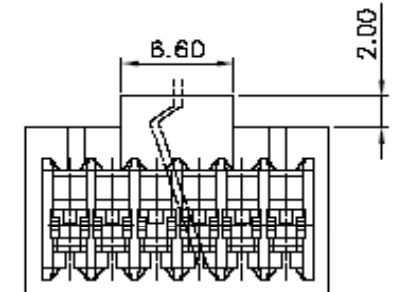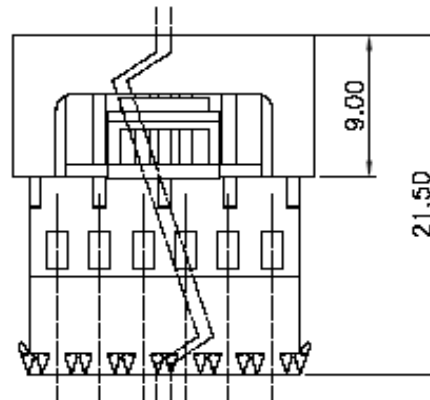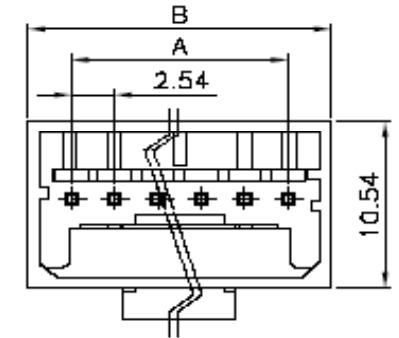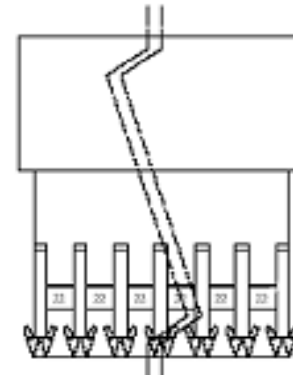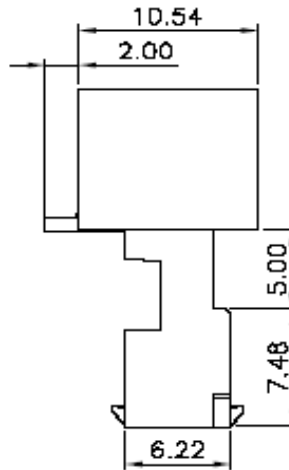


**Wire to Board Pitch 2,54mm
 Alternative to Serie MASCONN**

Part No.: **T68N021-**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.05.2020
APPD:	Schumi			FINISH	Jamy			Sheet No.	1 from 3

EDCON-COMPONENTS



Ordering Informations

Serie	Positions	Body Color	special Function	C- Plating	ROHS	Packing				
T68N021-	02	GN	00	TN	R	BU				

Look Table	GN= Green = AWG28	00= No Special function	TN= Tin Plated	R= ROHS Conform	BU= Bulk (Standard)
	BL= Blue = AWG26		GF= Gold Flash Plated	N= NON ROHS Conform	
	BK= Black =AWG24				
	RD= Red =AWG22				

Wire to Board Pitch 2,54mm Alternative to Serie MASCONN	
Part No.:	T68N021-
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.05.2020
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3