




Applications

- Interior automotive lighting
- Optical indicators
- Communication Products
- Backlighting
- Toys

Technical Drawing

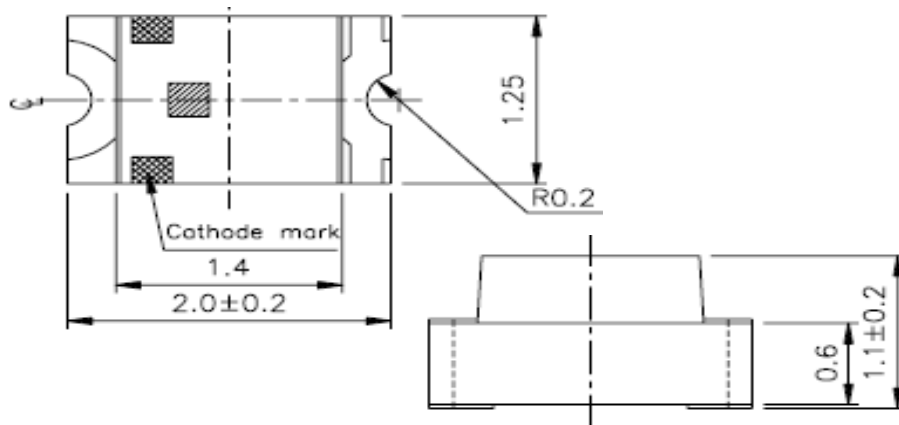

Recommended Soldering Pattern

Notes :

All dimensions in mm tolerance is $\pm 0.1\text{mm}$ unless otherwise noted.

| | |
|-----------------------------------|-----------------|
| SMT Top View LED Green | |
| Part No.: | M11E6020 |
| Customer: | |

| | | | | | | | |
|-------|------|------|-------|--------|------|-------|------------|
| DRW: | Dong | CHKD | Chang | MATL: | Chui | DATE | 21.06.2010 |
| APPD: | Ping | | | FINISH | Hui | Sheet | 1 from 9 |



Absolute Maximum Ratings

| Item | Symbol | InGaN | Unit |
|------------------------|------------|-------|------|
| Power Dissipation | P_D | --- | mW |
| DC Forward Current | I_F | --- | mA |
| Pulsed Forward Current | I_{FP}^* | --- | mA |
| Reverse Voltage | V_R | --- | V |
| Operating Temperature | T_{OP} | --- | °C |
| Storage Temperature | T_{ST} | --- | °C |

* 0.1 msec pulse, 10% duty cycle

Electrical / Optical Characteristics

$I_F=20mA$

| Ermitting Color | Green | | |
|----------------------|-----------------|-----|---------|
| Material | InGaN | | |
| Forward Voltage | typ. | 2.9 | V_F |
| | max. | 3.5 | V_F |
| Wavelength typ. | λ_D | 520 | nm |
| | λ_P | 530 | nm |
| | $\Delta\lambda$ | --- | nm |
| Color Temperature | min. | --- | K |
| | max. | --- | K |
| Luminous Intensity * | min. | 200 | mcd |
| | typ. | 250 | mcd |
| Reverse Current | max. | --- | μA |
| Viewing Angle | 2 Θ 1/2 | 120 | |

* Per NIST standards

SMT Top View LED Green

Part No.: **M11E6020**

Customer:

| | | | | | | | |
|-------|------|------|-------|--------|------|-------|------------|
| DRW: | Dong | CHKD | Chang | MATL: | Chui | DATE | 21.06.2010 |
| APPD: | Ping | | | FINISH | Hui | Sheet | 2 from 9 |

Copyright by EDCON-COMPONENTS



Directive Characteristics

SMT Top View LED Green

Part No.: **M11E6020**

Customer:

| | | | | | | | |
|-------|------|------|-------|--------|------|-------|------------|
| DRW: | Dong | CHKD | Chang | MATL: | Chui | DATE | 21.06.2010 |
| APPD: | Ping | | | FINISH | Hui | Sheet | 3 from 9 |

Copyright by EDCON-COMPONENTS



Curvs

**SMT Top View LED
Green**

Part No.: **M11E6020**

Customer:

| | | | | | | | |
|-------|------|------|-------|--------|------|-------|------------|
| DRW: | Dong | CHKD | Chang | MATL: | Chui | DATE | 21.06.2010 |
| APPD: | Ping | | | FINISH | Hui | Sheet | 4 from 9 |



Solder Condition

Lead Free Solder



| | |
|-----------------------------------|-----------------|
| SMT Top View LED Green | |
| Part No.: | M11E6020 |
| Customer: | |

| | | | | | | | |
|-------|------|------|-------|--------|------|-------|------------|
| DRW: | Dong | CHKD | Chang | MATL: | Chui | DATE | 21.06.2010 |
| APPD: | Ping | | | FINISH | Hui | Sheet | 5 from 9 |



Packing Specifications



Reel Specifications



**SMT Top View LED
 Green**

Part No.: **M11E6020**

Customer:

| | | | | | | | |
|-------|------|------|-------|--------|------|-------|------------|
| DRW: | Dong | CHKD | Chang | MATL: | Chui | DATE | 21.06.2010 |
| APPD: | Ping | | | FINISH | Hui | Sheet | 6 from 9 |



Handling Precautions

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.

1. Handle the component along the side surfaces by using forceps or appropriate tools



2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.



3. Do not stack together assembled PCBs containing exposed LEDs. Outside impact may scratch the silicone lens or damage the internal circuitry.



| | |
|-----------------------------------|-----------------|
| SMT Top View LED Green | |
| Part No.: | M11E6020 |
| Customer: | |

| | | | | | | | |
|-------|------|------|-------|--------|------|-------|------------|
| DRW: | Dong | CHKD | Chang | MATL: | Chui | DATE | 21.06.2010 |
| APPD: | Ping | | | FINISH | Hui | Sheet | 7 from 9 |



4. The outer diameter of the TOP LED pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.
5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.




| | |
|-----------------------------------|-----------------|
| SMT Top View LED Green | |
| Part No.: | M11E6020 |
| Customer: | |

| | | | | | | | |
|-------|------|------|-------|--------|------|-------|------------|
| DRW: | Dong | CHKD | Chang | MATL: | Chui | DATE | 21.06.2010 |
| APPD: | Ping | | | FINISH | Hui | Sheet | 8 from 9 |



Color table curve

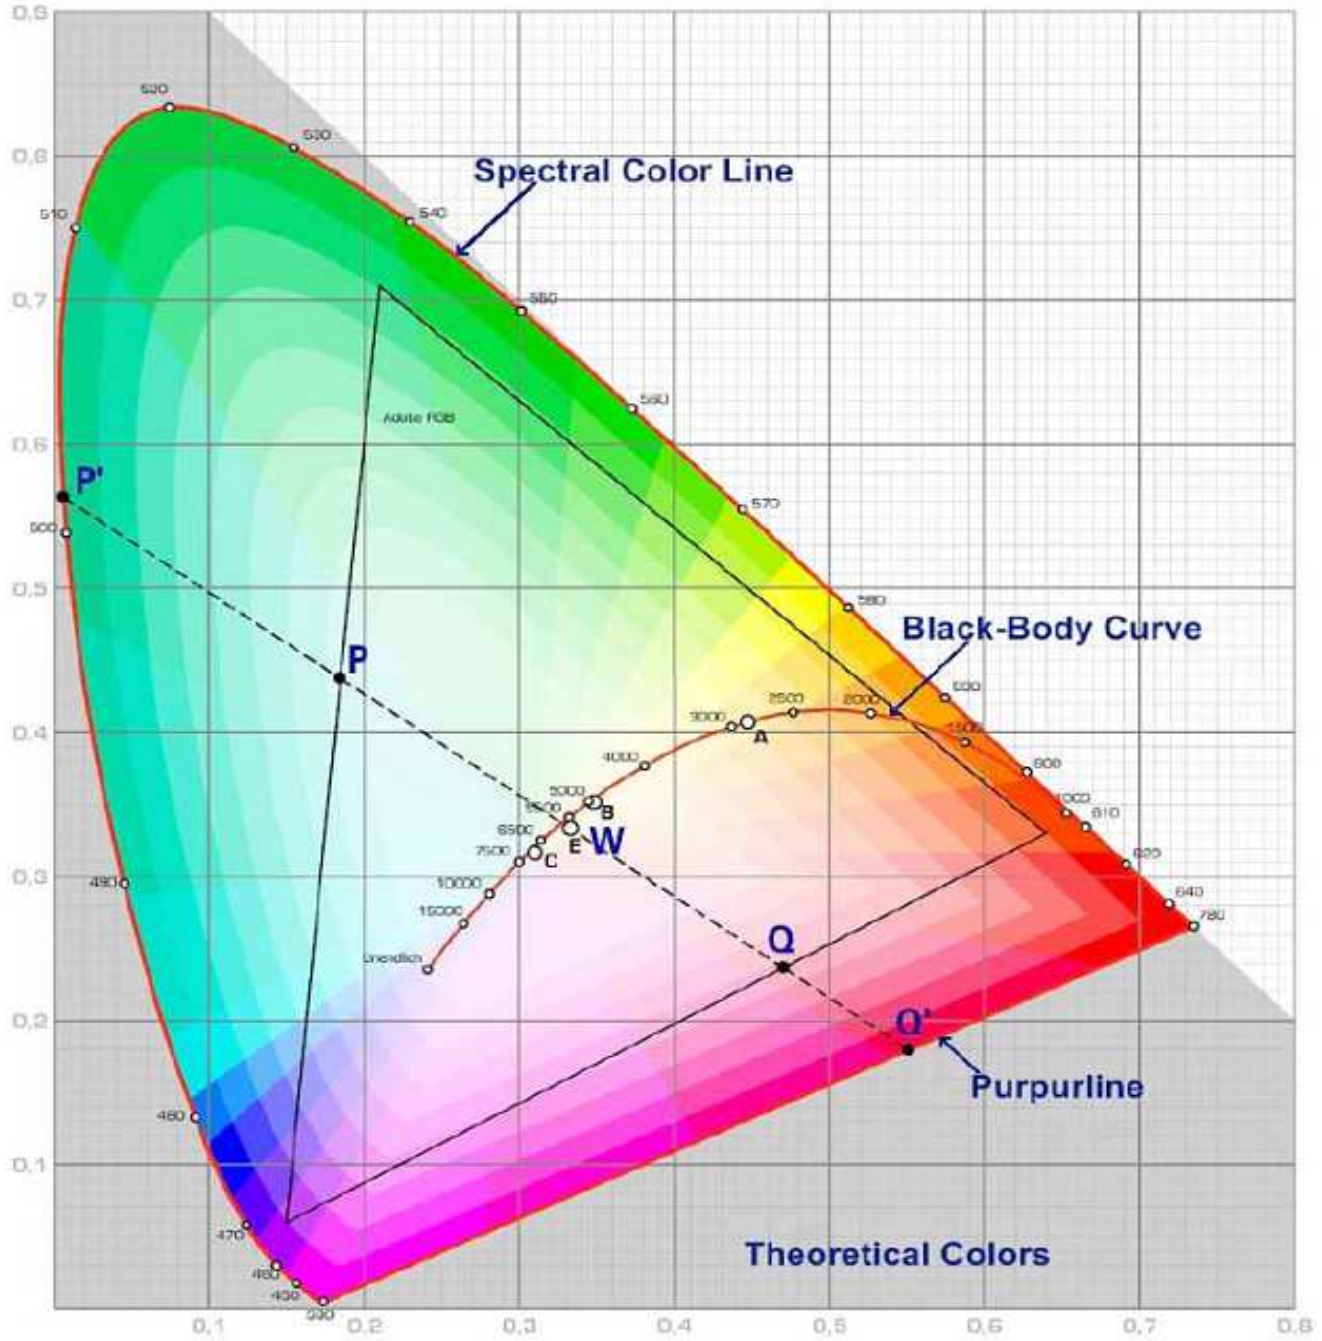

| | |
|-----------------------------------|-----------------|
| SMT Top View LED Green | |
| Part No.: | M11E6020 |
| Customer: | |

| | | | | | | | |
|-------|------|------|-------|--------|------|-------|------------|
| DRW: | Dong | CHKD | Chang | MATL: | Chui | DATE | 21.06.2010 |
| APPD: | Ping | | | FINISH | Hui | Sheet | 9 from 9 |

Copyright by EDCON-COMPONENTS