


**Type Code**


**CPT23A24-2.0:**

Chinasound Piezo Transducer 22.9(<23mm) width, type A(=27.3mm height, 10.0mm thickness), 24Vp-p rated voltage – 2.0KHz resonant frequency

**Picture**



**Frequency Response Curve**

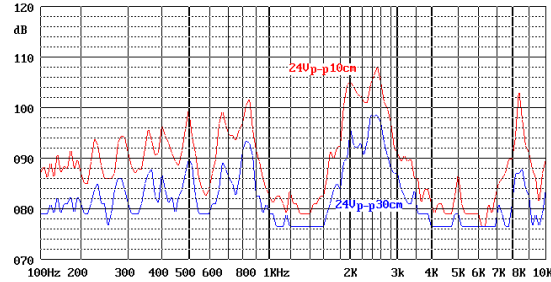

**Technical Terms**

Type	<b>CPT23A24-2.0</b>	
Rated Voltage (square wave)	(Vp-p)	24
Operating Voltage (square wave)	(Vp-p)	1~30
Rated Current at 24Vp-p, 2.0KHz	(mA)	10 max.
Capacitance at 100Hz, 1V	(pF)	30000±30%
SPL at 24Vp-p square wave, 10cm, 2.0KHz	(dB)	100 min.
Resonant Frequency	(Hz)	2000±500
Operating Temperature	(°C)	-20~+70
Storage Temperature	(°C)	-30~+80
Weight	(g)	3.5

**Reliability**

Life Test	Operate the part at 24Vp-p in room temperature continuously for 1000 hours.
Operating Temperature	Driving from -20 °C to +70 °C within 30 minutes for 2 cycles
High Temperature	+80 °C+/-2 °C, 120hrs
Low Temperature	-30 °C+/-2 °C, 120hrs
Humidity	+60 °C+/-2 °C, 90~95%RH, 120hrs
Thermal Shock	-30 °C+/-2 °C, 1hr→+20 °C,5min,→+80 °C+/-2 °C, 1hr→+20 °C,5min, 5 cycles
Shock	980/s <sup>2</sup> shock for each 3 mutually perpendicular directions to each of 3 times by half sine wave
Vibration	1.5mm with 10 to 50Hz of vibration frequency to each of 3 perpendicular direction for 2 hrs
Drop Test	Dropped naturally from 700mm height onto the surface of 10mm thick wooden board. 2 directions - upper and side of the part are to be applied

All specifications must be satisfied after the test (Recovery:2 to 4 hrs of recovery under the standard condition after the removal from test chamber)

**Dimensions (Unit:mm)**

