

Type Code


CET07A05-20-3.1

Chinasound Electro-magnetic Transducer 6.6(<7)mm diameter, type A(=3.6mm height) , 5Vo-p rated voltage - 20ohm coil resistance – 3.1KHz resonant frequency

Picture



Frequency Response Curve

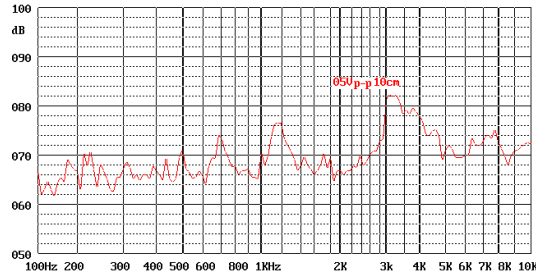

Technical Terms

Type	CET07A05-20-3.1	
Rated Voltage (square wave)	(Vp-p)	5
Operating Voltage	(Vp-p)	4~7
Rated Current at 5Vo-p, fo, 1/2 duty square wave	(mA)	80 max.
Coil Resistance	(ohm)	50+/-10%
SPL at 5Vo-p,10cm, fo, 1/2 duty square wave	(dB)	78dB min.
Resonant Frequency	(Hz)	3100 ± 500
Operating Temperature	(°C)	-20~+70
Storage Temperature	(°C)	-30~+80
Weight	(g)	0.4

Reliability

Life Test	Operate the part at 5Vo-p in room temperature continuously for 1000 hours.
Operating Temperature	Driving from -20 °C to+70 °C within 30 minutes for 2 cycles
High Temperature	+80+/-2 °C for 96 hours
Low Temperature	-30+/-2 °C for 96 hours
Humidity	25 °C+/-2 °C, 90-95%RH, 5hr→up to 55 °C+/-2 °C, 90-95%RH, 0.5hr →55 °C+/-2 °C, 90-95%RH, 5hr→down to 25 °C+/-2 °C, 90-95%RH, 0.5hr, 10 cycles
Thermal Shock	-30 °C+/-2 °C, 30min→+20 °C,15min,→+80 °C+/-2 °C, 30min→+20 °C,15min, 5 cycles
Shock	980/s ² shock for each 3 mutually perpendicular directions to each of 3 times by half sine wave
Vibration	1.5mm with 10 to 50Hz of vibration frequency to each of 3 perpendicular direction for 2 hrs
Drop Test	Dropped naturally from 700mm height onto the surface of 10mm thick wooden board. 2 directions - upper and side of the part are to be applied.

All specifications must be satisfied after the test (Recovery:2 to 4 hrs of recovery under the standard condition after the removal from test chamber).

Dimensions (Unit:mm)

