

Type Code


CMS29RA9.5A-8F0.25-1T700:

Chinasound Mylar Speaker 29mm diameter, 9.5mm height, Round ABS frame - 8ohm rated impedance, Ferrite magnet, 0.25W rated power – type 1, Transparent Mylar cone, 700 Hz rated frequency

Picture



Frequency Response Curve Tested by LMS at 0.25W 0.5m

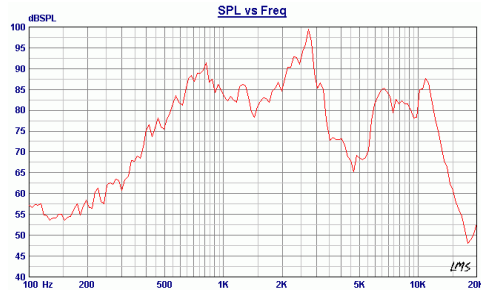

Technical Terms

| Type | CMS29RA9.5A-8N0.25-1T700 | |
|-----------------------|---------------------------------|----------------|
| *Rated Impedance | (ohm) | 8+/-15% |
| Rated (Max.) Power | (W) | 0.25 (0.5) |
| Resonance Frequency | (Hz) | 700+/-20% |
| Rated Frequency Range | (Hz) | fo~4000 |
| *Sound Pressure Level | (dB) | 80+/-3 at 1m1W |
| Operating Temperature | (°C) | -20~+60 |

*Other Rated Impedance is available. **Average of SPL values at 800, 1000, 1200 & 1500 Hz.

Reliability

| | |
|--------------------|--|
| Buzzes & Rattles | 0.25W(=1.41V) sine wave |
| Load Test | 0.25W(=1.41V) for 24hrs |
| High Temp. Test | +60±2C° for 16hrs |
| Cold Temp. Test | -20+/-2C° for 2hrs |
| Moisture Test | +40+/-2C°, 92+/-% R.H. for 48hrs |
| Temp. Cycling Test | 5 cycles, 1 cycle consisting of -20+/-2C° for 10min; 20+/-5C° for 5min; +50+/-2C° for 10min; 20+/-5C° for 5min |
| Vibration Test | Freq.: 10Hz to 55Hz; Amplitude:1.5mm; Time: 30min per each axis (X,Y and Z-axis) |

All specifications must be satisfied after the test (Recovery:2 to 4 hrs of recovery under the standard condition after the removal from test chamber)

Dimensions (Unit:mm)

