



EDCON-COMPONENTS



Specifications

Voltage Rating:	250 V AC/DC
Current Rating:	3A AC/DC
Operating Temperature:	-40°C to + 105°C
Contact Resistance:	10 mΩ
Withstanding Voltage:	800 V AC/Minute
Insulation Resistance:	1000MΩ min.
Material Housing:	Nylon 66 / UL94V-0
Pin-Material:	Brass /Tin-plated
Color of Base:	Natural

Drawing (dimensions all into mm)

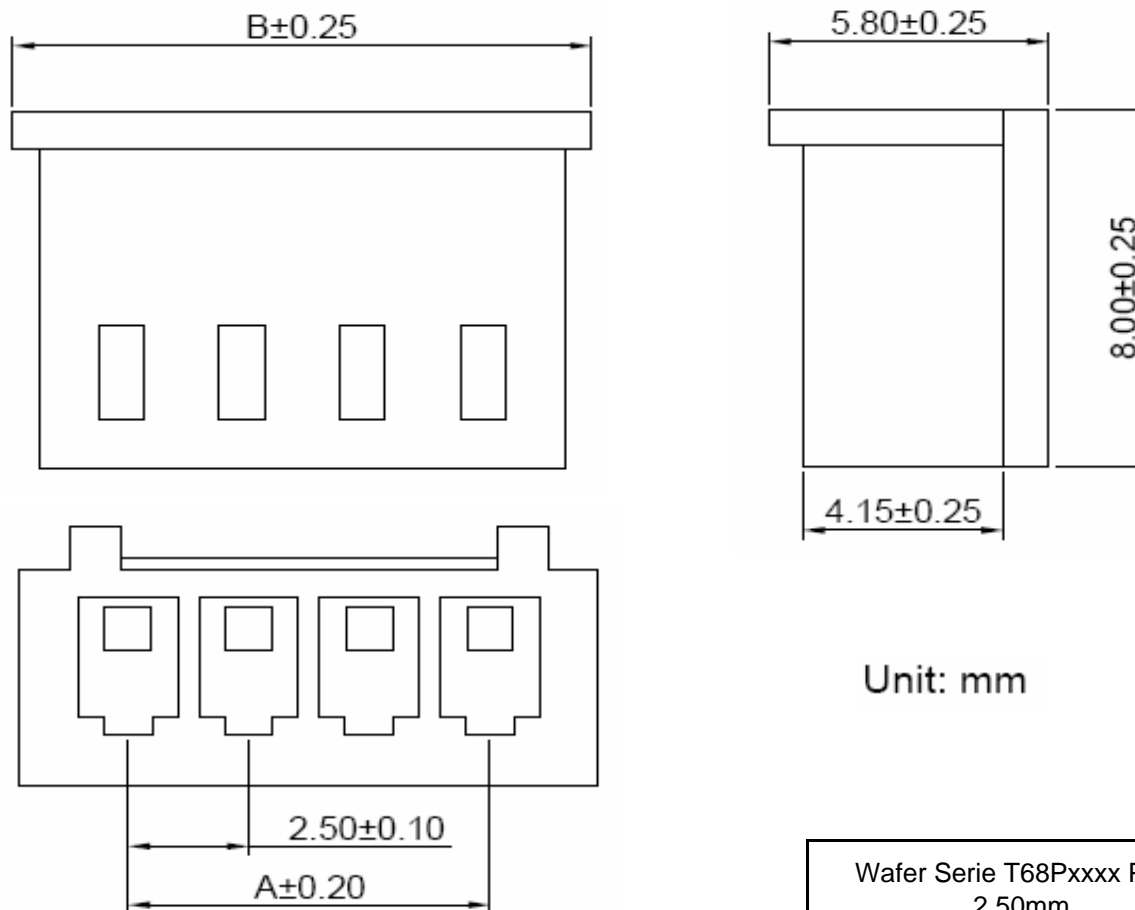


Unit: mm

Wafer Serie T68Pxxxx Pitch
2,50mm

Part No.: **T68P094**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	09.05.2012
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	



Dimension Information


Pos.	Dimension (mm)					
	A	B	C	D	E	F
2	2,50	7,00				
3	5,00	9,50				
4	7,50	12,00				
5	10,00	14,50				
6	12,50	17,00				
7	15,00	19,50				
8	17,50	22,00				
9	20,00	24,50				
10	22,50	27,00				
11	25,00	29,50				
12	27,50	32,00				
13	30,00	34,50				
14	32,50	37,00				
15	35,00	39,50				
16	37,50	42,00				
17	40,00	44,50				
18	42,50	47,00				
19	45,00	49,50				
20	47,50	52,00				

Pos.	Dimension (mm)					
	A	B	C	D	E	F

Wafer Serie T68Pxxxx Pitch 2,50mm
Part No.: T68P094
Customer:

DRW: Jason	CHKD: Wilson	MATL: Wilson	TOLERANCE: Mason	DATE: 09.05.2012
APPD: Schumi	FINISH: Jamy	Sheet No.:	2 from 3	

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Pos.	Special function	Color of Body	Packing						
T68P094	02	X	NA	BU						
	xx = Pos.	X= no function	NA= Natural (Standard)	BU= Bulk Ware						

Wafer Serie T68Pxxxx Pitch 2,50mm

Part No.: **T68P094**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	09.05.2012	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3		