


EDCON-COMPONENTS




Specifications



Voltage Rating: 500 V AC/DC
 Current Rating: 3A AC/DC
 Operating Temperature: -40°C to + 105°C
 Contact Resistance: 20 mΩ
 Withstanding Voltage: 1000 V AC/Minute
 Insulation Resistance: 500MΩ min.
 Material Housing: Nylon 66 / UL94V-0

Pin-Material: Brass /Tin-plated
 Color of Base: Natural (White)

Drawing (dimensions all into mm)

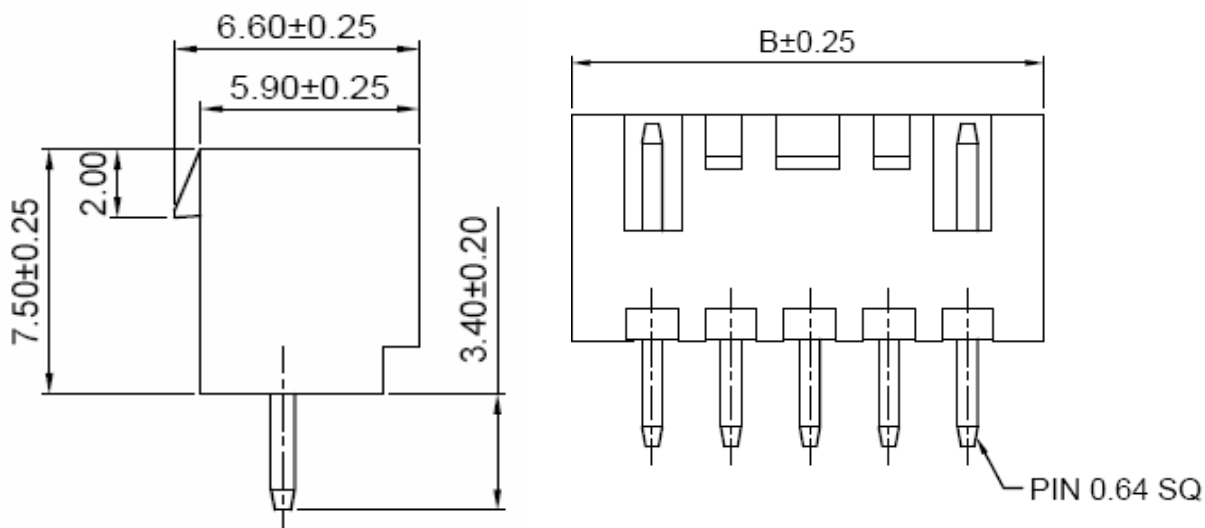

P.C.B. Layout

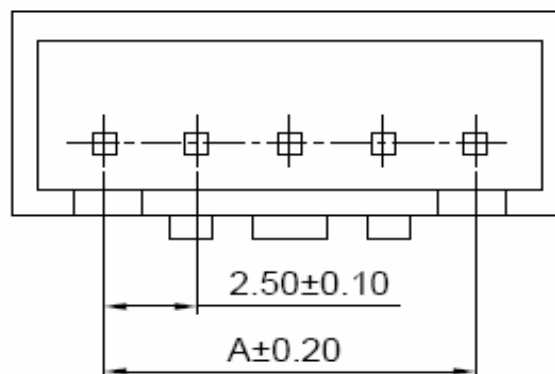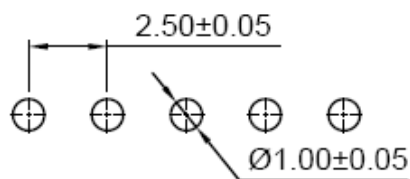


Wafer Serie T68Pxxxx Pitch
2,50mm

Part No.: **T68P102**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2012
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS




Ordering Informations

Serie	Number of Pos.	Special function	Color of Body	Packing						
T68P102	02	X	NA	BU						
	xx = Pos.	X= no function	NA= Natural (Standard)	BU= Bulk Ware						


Wafer Serie T68Pxxxx Pitch 2,50mm
Part No.: T68P102
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2012
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

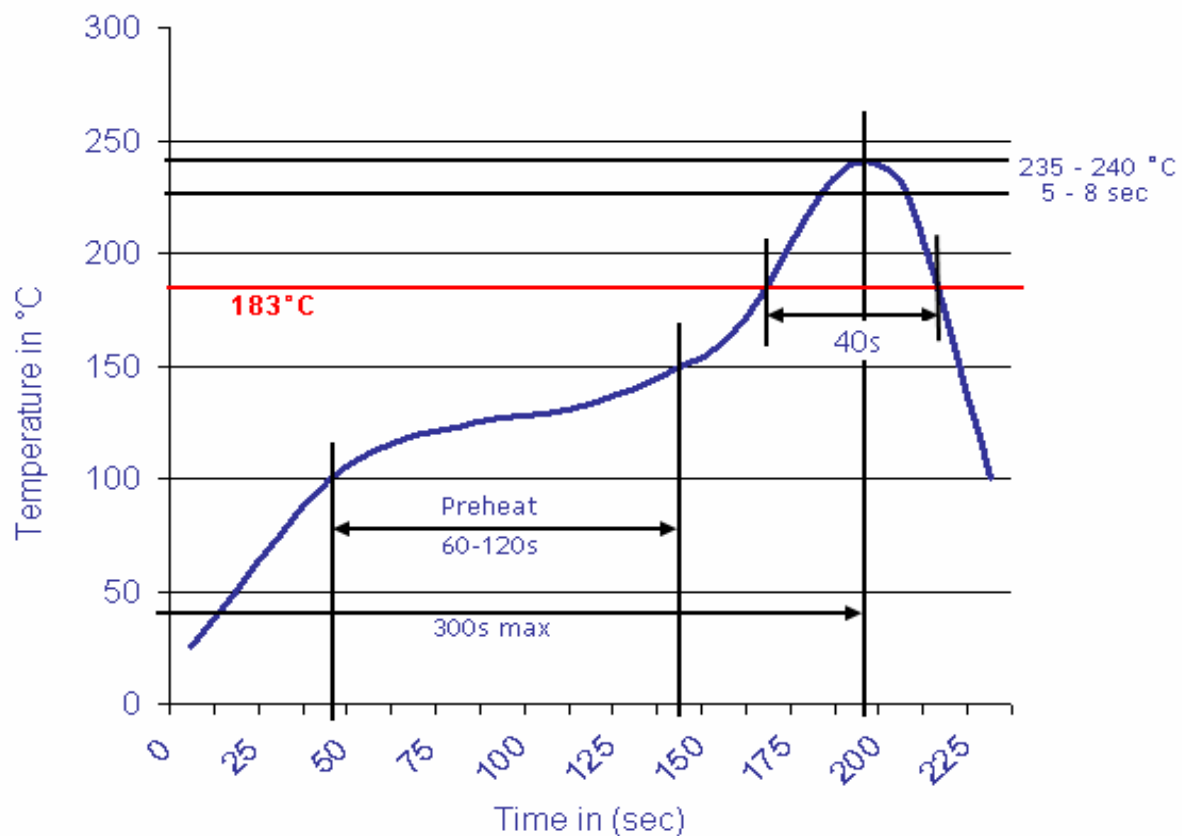

Wafer Serie T68Pxxxx Pitch
2,50mm

Part No.: **T68P102**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2012
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	Customer: