


EDCON-COMPONENTS

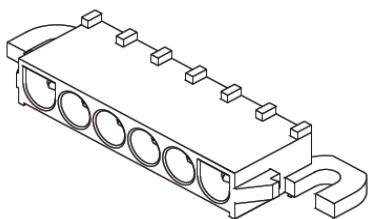


Specifications


Voltage Rating: 600VAC /DC
 Current Rating 15AC / DC
 Operating Temperature . -25°C ~ +85°C
 Contact Resistance 3,5m Ω Max.
 Withstanding Voltage 5000V AC/minute
 Insulation Resistance 1000M Ω Min.

Material: Nylon 66, UL94V-0 or UL94V-2
 Material Pin Brass / Tin-Plated

Drawing (dimensions all into mm)

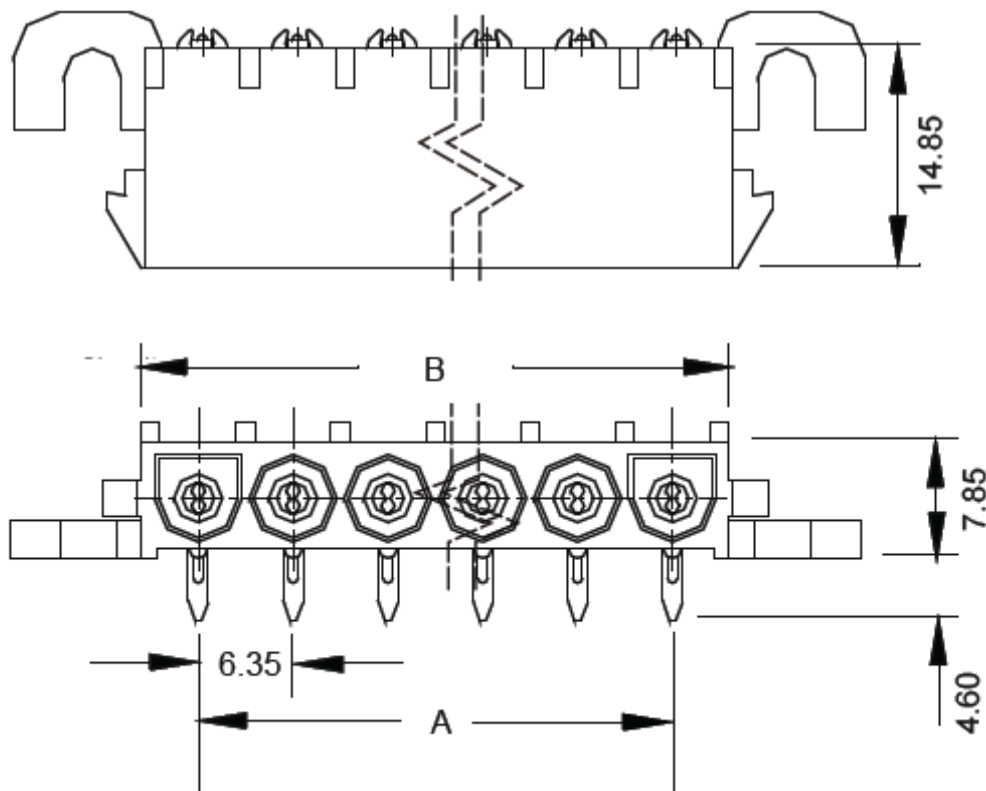

Plug




**Female Wire to Board Serie
 Pitch 6,35mm with Polarisation**

Part No.: **T68M012**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS

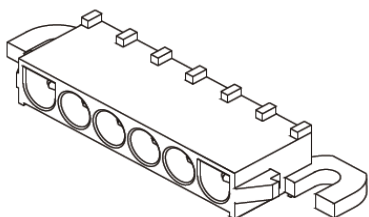

Ordering Informations

Serie	Number of	Body	Contact	ROHS	Packing					
T68M012	02	V0	T	R	BU					

02 = 2Pos.	V0 = Material	T = Tin Plated (Standard)	R = ROHS Conform	BU = Bulk (Standard)
03 = 3Pos.	V2 = Material		N = NON ROHS Conform	
04 = 4Pos.		G = Gold Flash Plated (MOQ on request)		
05 = 5Pos.				
06 = 6Pos.				
08 = 8Pos.				

**Female Wire to Board Serie
Pitch 6,35mm with Polarisation**


Part No.: **T68M012**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:

www.edcon-components.com


email: info@edcon-components.com

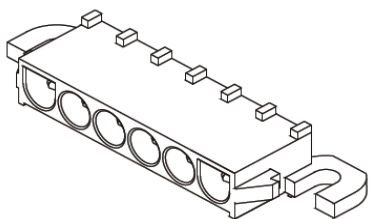

Soldering Profile

Lead Free Curve

Classification Reflow Profile (JEDEC J-STD-020C)

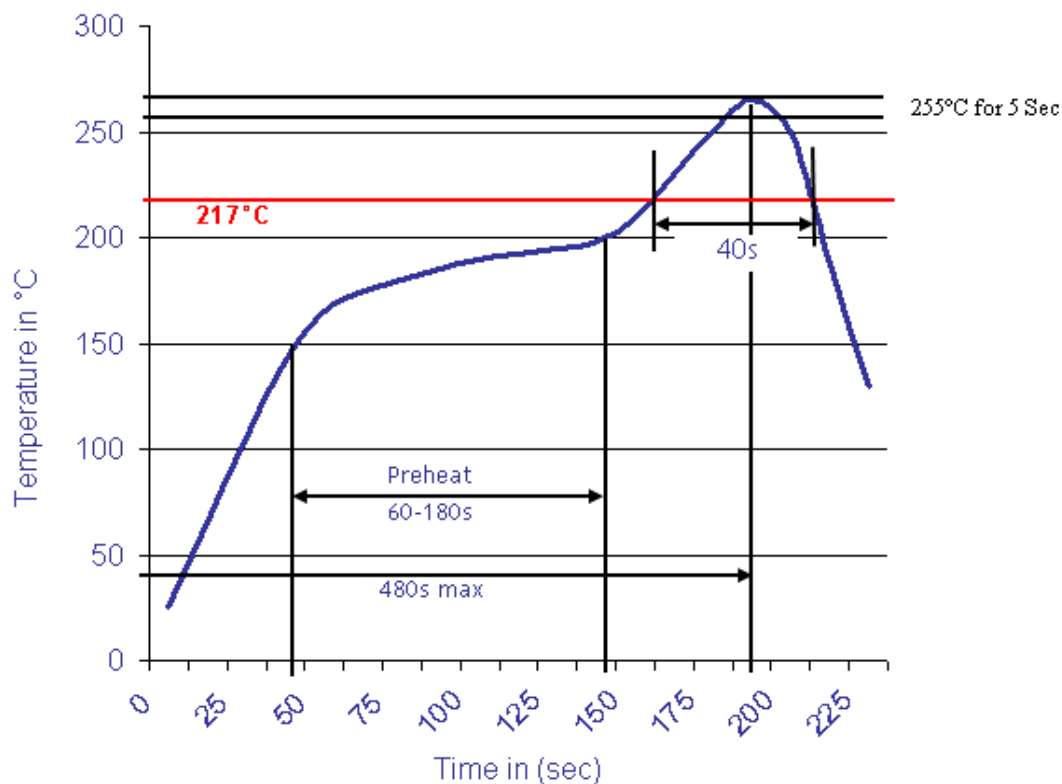

Female Wire to Board Serie
Pitch 6,35mm with Polarisation

Part No.: **T68M012**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	

Customer: