



# EDCON-COMPONENTS

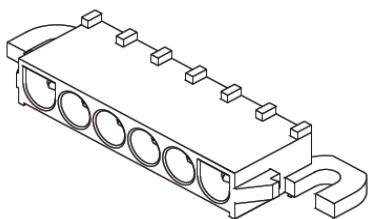


## Specifications

Voltage Rating:	600VAC /DC
Current Rating	15AC / DC
Operating Temperature	-25°C ~ +85°C
Contact Resistance	3,5m Ω Max.
Withstanding Voltage	5000V AC/minute
Insulation Resistance	1000M Ω Min.
Material:	Nylon 66, UL94V-0 or UL94V-2
Material Pin	Brass / Tin-Plated

## Drawing ( dimensions all into mm)

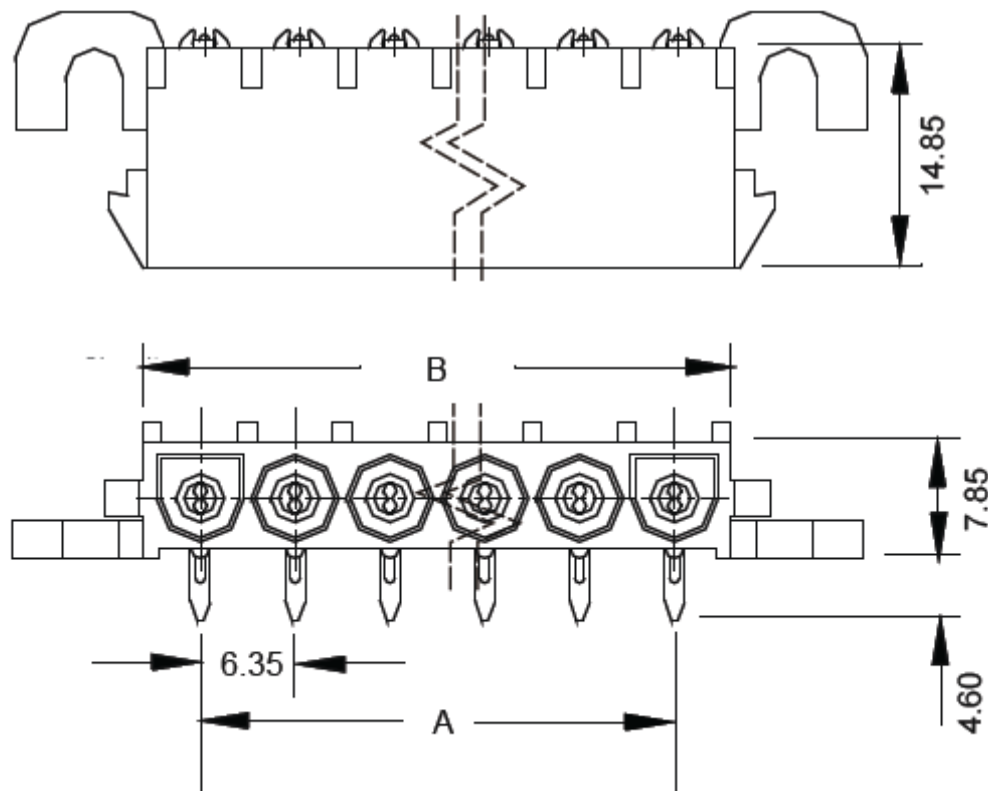

## Receptacle



**Male Wire to Board Serie Pitch  
6,35mm with Polarisation**


Part No.: **T68M013**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.07.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	



# EDCON-COMPONENTS

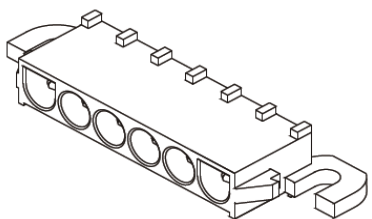

## Ordering Informations

Serie	Number of	Body	Contact	ROHS	Packing					
<b>T68M013</b>	<b>02</b>	<b>V0</b>	<b>T</b>	<b>R</b>	<b>BU</b>					

<b>02</b> = 2Pos.	<b>V0</b> = Material	<b>T</b> = Tin Plated (Standard)	<b>R</b> = ROHS Conform	<b>BU</b> = Bulk (Standard)
<b>03</b> = 3Pos.	<b>V2</b> = Material		<b>N</b> = NON ROHS Conform	
<b>04</b> = 4Pos.		<b>G</b> = Gold Flash Plated (MOQ on request)		
<b>05</b> = 5Pos.				
<b>06</b> = 6Pos.				
<b>08</b> = 8Pos.				

**Male Wire to Board Serie Pitch  
6,35mm with Polarisation**


Part No.: **T68M013**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.07.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:

[www.edcon-components.com](http://www.edcon-components.com)


email: [info@edcon-components.com](mailto:info@edcon-components.com)

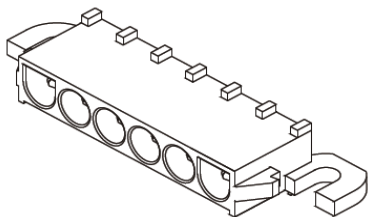

Soldering Profile

Lead Free Curve

Classification Reflow Profile (JEDEC J-STD-020C)

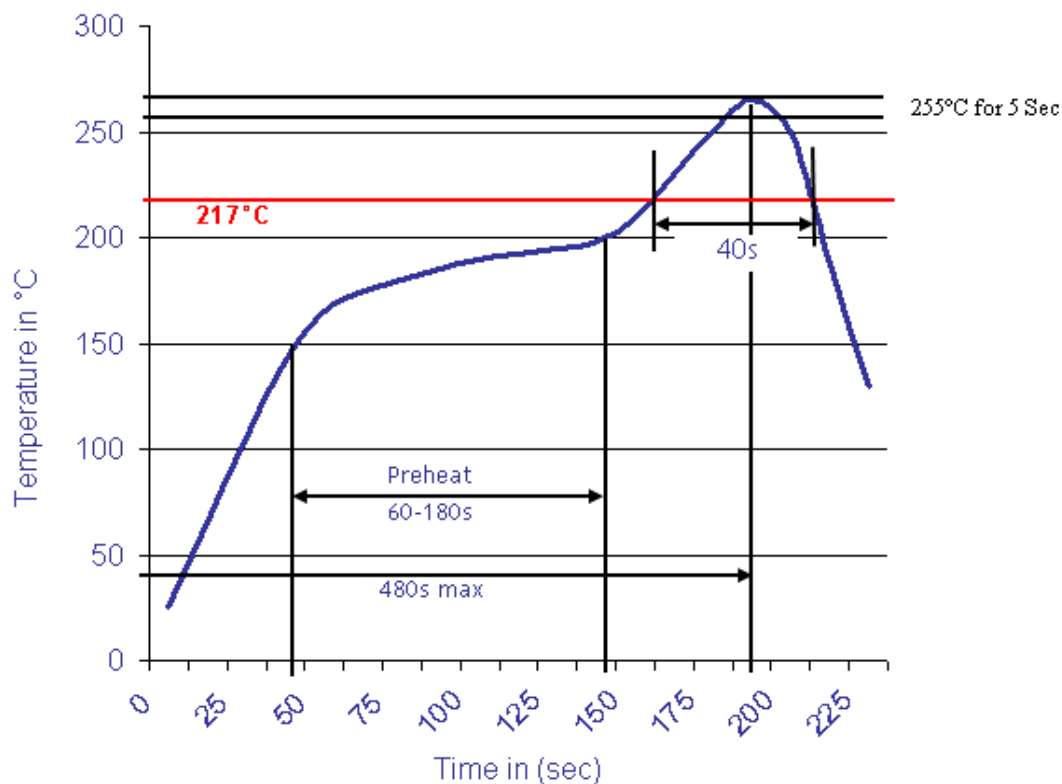

**Male Wire to Board Serie Pitch  
6,35mm with Polarisation**

Part No.: **T68M013**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.07.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 4

Customer: