


# EDCON-COMPONENTS





## Technical Requirement

2,79mm-3,30mm Insulation diameter passed European IP Sealing level #5/7 (swirling dust / Immersion to 1Meter for 30Minutes).

1,52mm-2,79mm Insulation diameter passed European IP sealing level #5/6 (Swirling dust / heavy seas)

Wire AWG range is #20-14 with Insulation diameter range from 1,52mm-3,3mm.

## Drawing ( dimensions all into mm)

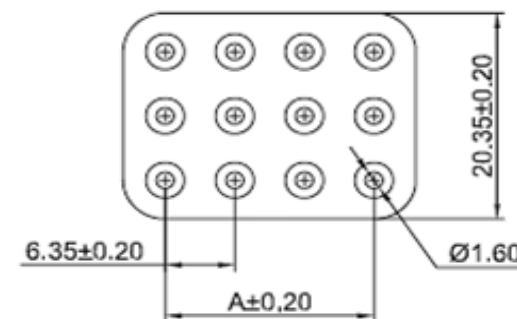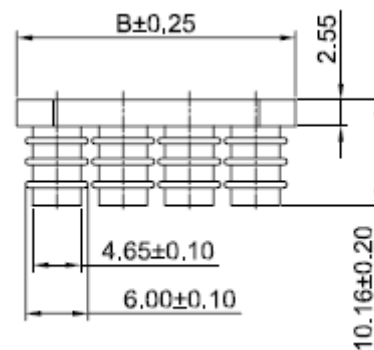

Wire to Wire Serie Pitch 6,35mm


Part No.: **T68M016**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	



# EDCON-COMPONENTS



## Ordering Informations

Serie	Number of	Color	ROHS	Packing						
<b>T68M016</b>	<b>06</b>	<b>BL</b>	<b>R</b>	<b>BU</b>						

<b>06 =</b> 3x2Pos.	<b>BL= Blue</b>	<b>R= ROHS</b> Conform	<b>BU= Bulk</b> (Standard)
<b>09 =</b> 3x3Pos.			
<b>12 =</b> 3x4Pos.			
<b>15 =</b> 3x5Pos.			

<b>Wire to Wire Serie Pitch 6,35mm</b>
Part No.: <b>T68M016</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)