


EDCON-COMPONENTS






Specifications

Voltage Rating: 600VAC /DC
 Current Rating 15AC / DC
 Operating Temperature . -25°C ~ +85°C
 Contact Resistance 3,5m Ω Max.
 Withstanding Voltage 5000V AC/minute
 Insulation Resistance 1000M Ω Min.

Material: Nylon 66, UL94V-0 or UL94V-2
 Material Pin Brass / Tin-Plated

Drawing (dimensions all into mm)

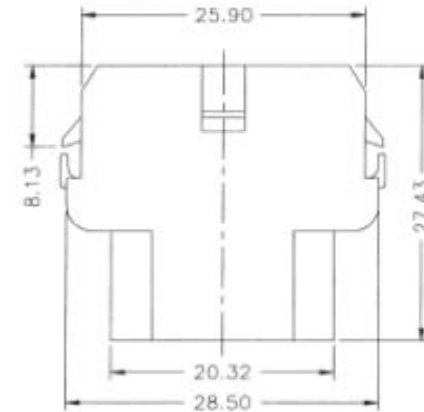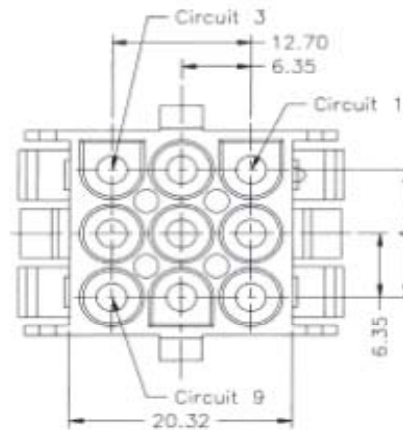

Wire to Wire Serie Pitch 6,35mm

Part No.: **T68M018 -**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	18.02.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Number of	Body	Special	ROHS	Packing					
T68M018 -	06	V0	N	R	BU					

06 = 2x3Pos.	V0= Material	N= No function at the moment	R= ROHS Conform	BU= Bulk (Standard)
09 = 3x3Pos.	V2= Material		N= NON ROHS Conform	
12 = 3x4Pos.				
15 = 3x5Pos.				

Wire to Wire Serie Pitch 6,35mm

Part No.: **T68M018 -**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	18.02.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

Customer: