





EDCON-COMPONENTS



Specifications

Voltage Rating:	600VAC /DC
Current Rating	19AC / DC
Operating Temperature	. -40°C ~ +105°C
Contact Resistance	3,5m Ω Max.
Withstanding Voltage	5000V AC/minute
Insulation Resistance	1000M Ω Min.
 Material:	 Nylon 66, UL94V-0 Nylon 66, UL94V-2

Drawing (dimensions all into mm)

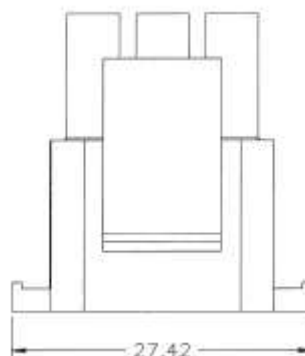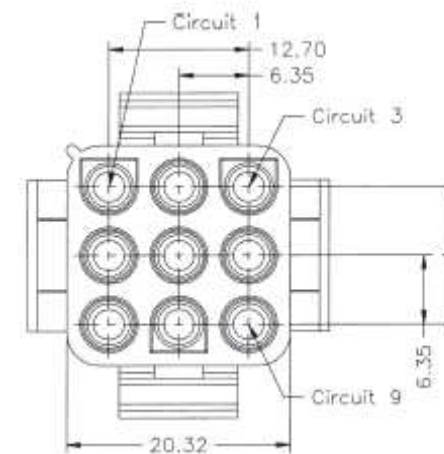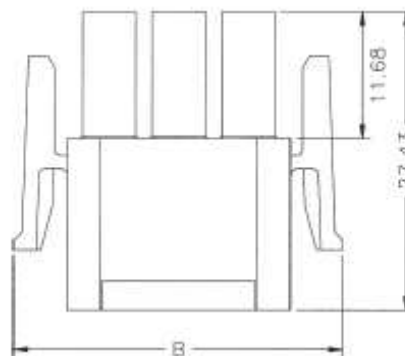


**Housing Wire to Board Serie
Pitch 6,35mm**

Part No.: **T68M019**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

EDCON-COMPONENTS



Ordering Informations

Serie	Number of	Body	Special	ROHS	Packing					
T68M019	06	V0	N	R	BU					

06 = 2x3Pos.	V0= Material	N= No function	R= ROHS Conform	BU= Bulk (Standard)
09 = 3x3Pos.	V2= Material		N= NON ROHS Conform	
12 = 3x4Pos.				
15 = 3x5Pos.				

Housing Wire to Board Serie Pitch 6,35mm	
Part No.:	T68M019
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

www.edcon-components.com

email: info@edcon-components.com