


EDCON-COMPONENTS






Specifications

Voltage Rating: 600VAC /DC
Current Rating 15AC / DC
Operating Temperature . -25°C ~ +85°C
Contact Resistance 3,5m Ω Max.
Withstanding Voltage 5000V AC/minute
Insulation Resistance 1000M Ω Min.

Material: Nylon 66, UL94V-0 or UL94V-2
Material Pin Brass / Tin-Plated

Drawing (dimensions all into mm)

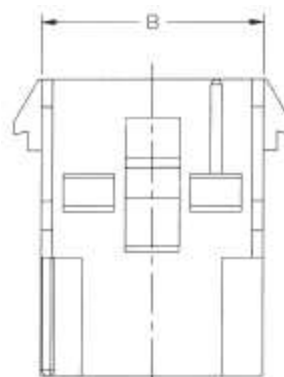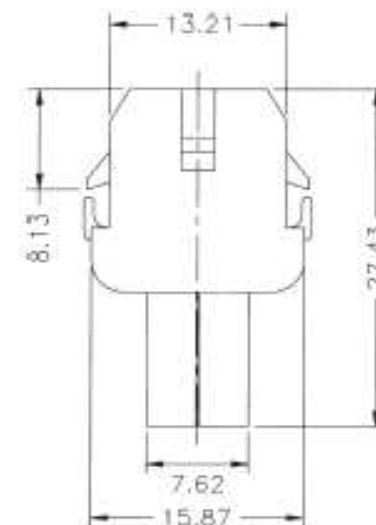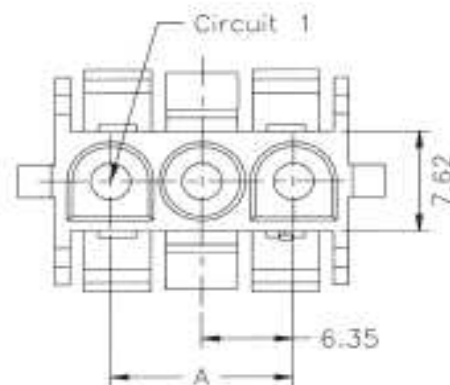

Wire to Wire Serie Pitch 6,35mm

Part No.: **T68M020**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Dimension Informations about Wafer

Pos.	Dimension (mm)					
	A	B	C	D	E	F
02P	6,35	13,97				
03P	12,70	20,32				
04P	19,05	26,67				
05P	25,40	33,02				
06P	31,75	39,37				
08P	44,45	52,07				

Pos.	Dimension (mm)					
	A	B	C	D	E	F


Wire to Wire Serie Pitch 6,35mm	
Part No.:	T68M020
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Number of	Body	Contact	ROHS	Packing					
T68M020	02	V0	T	R	BU					

02 = 2Pos.	V0 = Material	T = Tin Plated (Standard)	R = ROHS Conform	BU = Bulk (Standard)
03 = 3Pos.	V2 = Material		N = NON ROHS Conform	
04 = 4Pos.		G = Gold Flash Plated (MOQ on request)		
05 = 5Pos.				
06 = 6Pos.				
08 = 8Pos.				

Wire to Wire Serie Pitch 6,35mm

Part No.: **T68M020**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

Customer:

www.edcon-components.com

email: info@edcon-components.com