




EDCON-COMPONENTS



Specifications

| | |
|------------------------|--------------------|
| Voltage Rating: | 250 V AC/DC |
| Current Rating: | 4A AC/DC |
| Operating Temperature: | -25°C to + 85°C |
| Contact Resistance: | 7milli Ohm |
| Withstanding Voltage: | 1500 V AC/Minute |
| Insulation Resistance: | 1000Mege Ohm min. |
| Applicable Wire: | AWG18 ~ 22 |
| Material Housing: | Nylon 66 / UL94V-0 |

Drawing (dimensions all into mm)

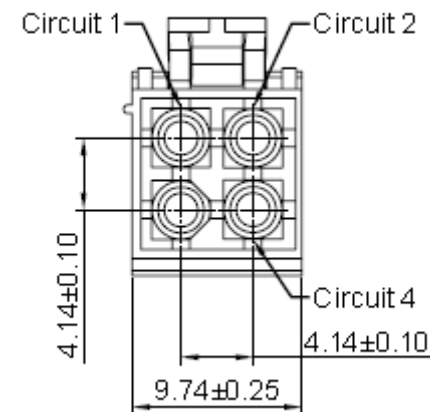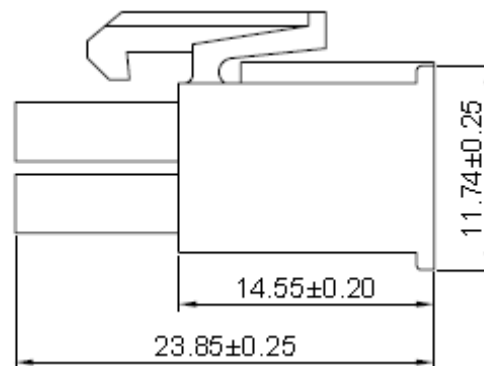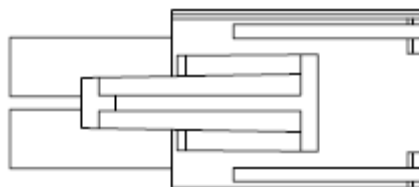

| | |
|--|------------------|
| Housing Serie T68R1005 Pitch 4,14mm | |
| Part No.: | T68R1005- |
| Customer: | |

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 12.04.2014 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 1 from 2 |

EDCON-COMPONENTS



Ordering Informations

| Serie | Number of Pos. | ROHS | Packing | | | | | | | |
|-------|----------------|------|---------|--|--|--|--|--|--|--|
|-------|----------------|------|---------|--|--|--|--|--|--|--|

| | | | | | | | | | | |
|------------------|-----------|----------|-----------|--|--|--|--|--|--|--|
| T68R1005- | 04 | R | BU | | | | | | | |
|------------------|-----------|----------|-----------|--|--|--|--|--|--|--|

| | | | | | | | | | | |
|------------------|----------------------------|-------------------------|--|--|--|--|--|--|--|--|
| xx = Pos. | R= ROHS Conform | BU= Bulk Packing | | | | | | | | |
| | N= NON ROHS Conform | | | | | | | | | |

Housing Serie T68R1005 Pitch 4,14mm

Part No.: **T68R1005-**

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 12.04.2014 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 2 from 2 |

Customer: