


EDCON-COMPONENTS




Specifications

Voltage Rating:	600V AC/DC
Current Rating	9A AC/DC
Operating Temperature	.-25°C ~ +105°C
Contact Resistance	20 milli Ohm max.
Withstanding Voltage	1500V AC / minute
Insulation Resistance	1000Mega Ohm
Material:	Nylon 66 UL94V-0
Body Color:	White

Drawing (dimensions all into mm)

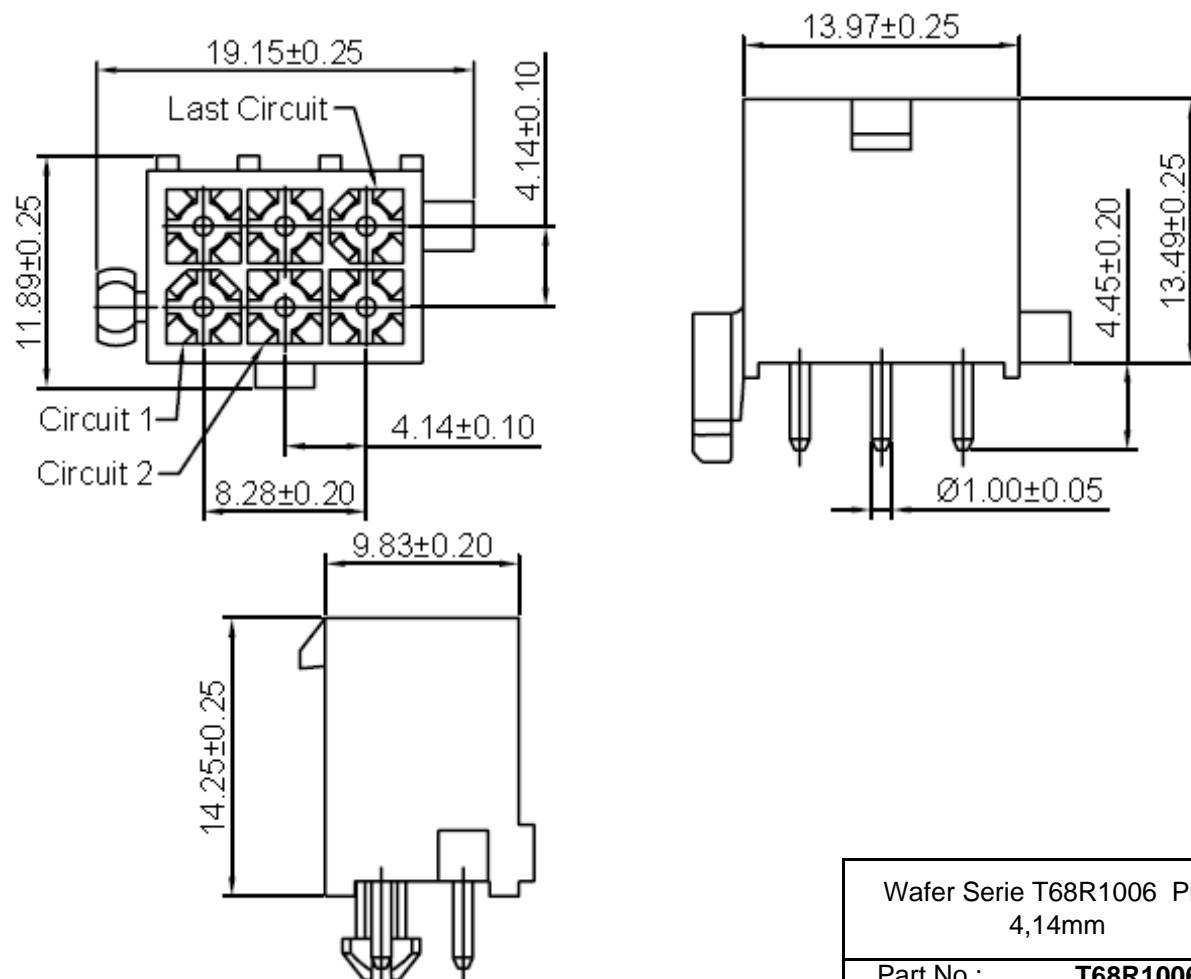

Terminal Assembly Drawing 180° Wafer all Positions

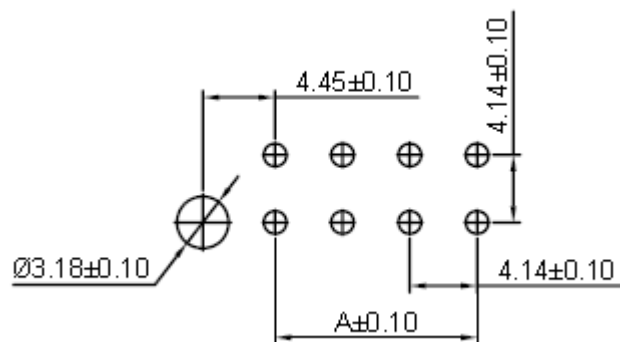

Wafer Serie T68R1006 Pitch
4,14mm

Part No.: **T68R1006-**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.04.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

www.edcon-components.com

email: info@edcon-components.com

Copyright by S.Tiede

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Pos.	Contact Plating	ROHS	Packing						
-------	----------------	-----------------	------	---------	--	--	--	--	--	--

T68R1006-	04	T	R	BU						
------------------	-----------	----------	----------	-----------	--	--	--	--	--	--

xx = Pos.	T= Tin Plated (Standard)	R= ROHS Conform	BU= Bulk (Standard)						
			TY= Tray Packing						
	G= Gold Flash Plated MOQ is important	N= NON ROHS Conform							


Wafer Serie T68R1006 Pitch 4,14mm
Part No.: T68R1006-
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.04.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3



Soldering - Profile

Classification Reflow Profile (JEDEC J-STD-020C)

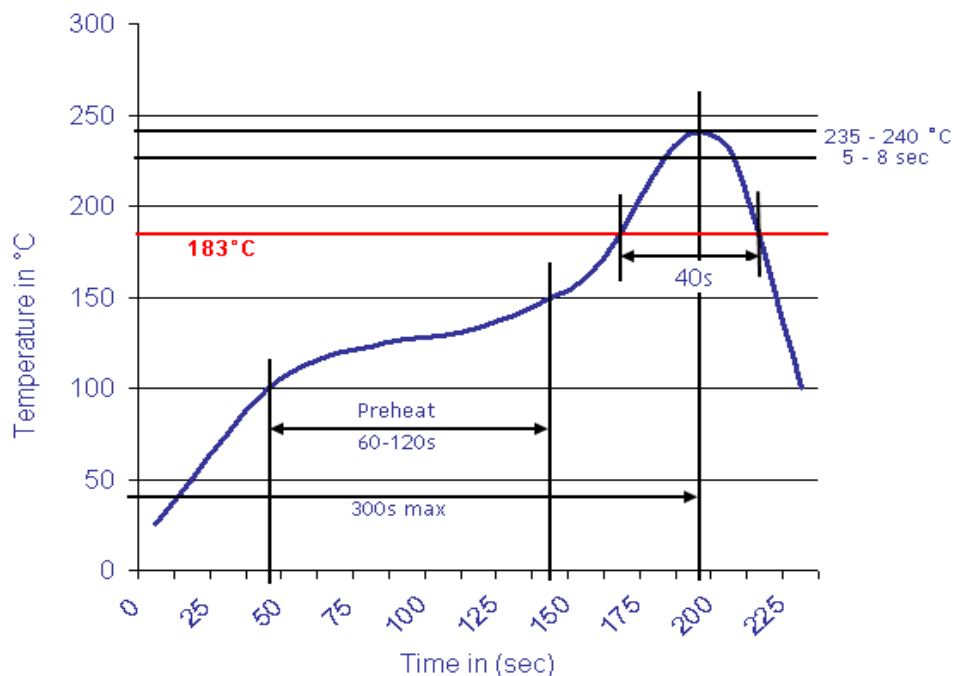

Wafer Serie T68R1006 Pitch 4,14mm	
Part No.:	T68R1006-
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.04.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	