




### Specifications

Voltage Rating:	250 V AC/DC
Current Rating:	4A AC/DC
Operating Temperature:	-25°C to + 85°C
Contact Resistance:	7milli Ohm
Withstanding Voltage:	1500 V AC/Minute
Insulation Resistance:	1000Mege Ohm min.
Applicable Wire:	AWG18 ~ 22
Material Housing:	Nylon 66 / UL94V-0

### Drawing ( dimensions all into mm)

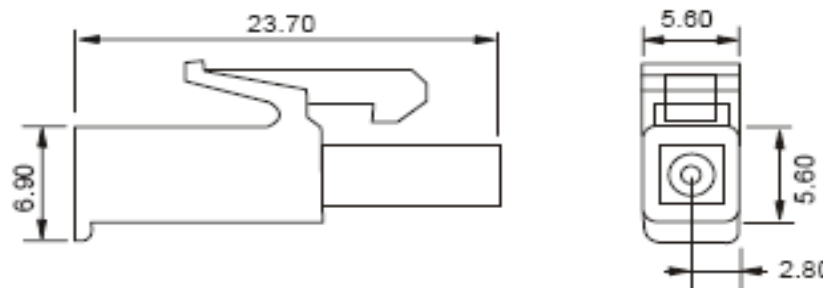

Housing Serie T68Rxxxx Pitch 4,14mm	
Part No.:	<b>T68R1018</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	





## Ordering Informations

Serie	Number of Pos.	Packing								
-------	----------------	---------	--	--	--	--	--	--	--	--

<b>T68R1018</b>	<b>01</b>	<b>BU</b>								
-----------------	-----------	-----------	--	--	--	--	--	--	--	--

<b>xx = Pos.</b>	<b>BU= Bulk Packing</b>									



Housing Serie T68Rxxxx Pitch 4,14mm	
Part No.:	<b>T68R1018</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	