


# EDCON-COMPONENTS



## Specifications

Current Rating	4A AC,DC
Voltage rating	250V AC,DC
Temperature range	-25°C ~ +85°C
Contact resistance	10mΩ max.
Insulation resistance	1000MΩ min.
Withstanding voltage	1500V AC/minute
Material:	Nylon 66 (UL94V-0)

## Drawing ( dimensions all into mm)

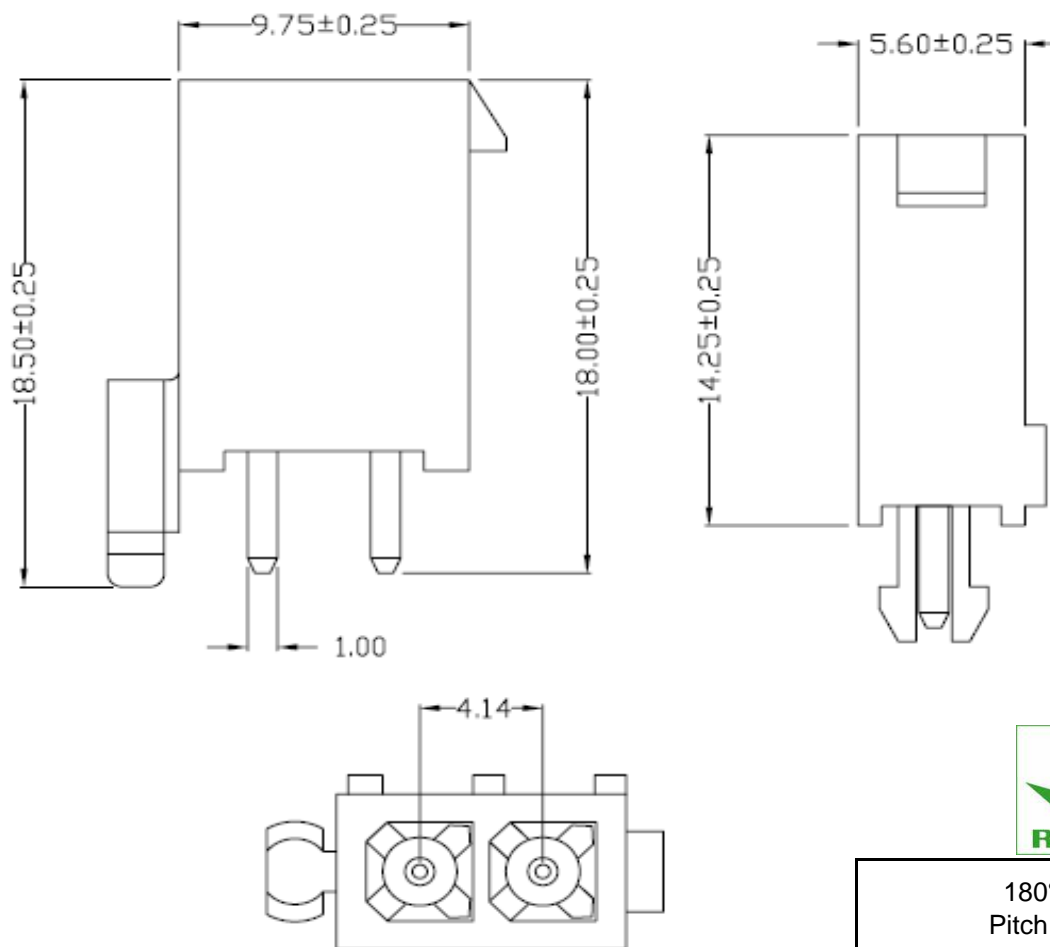

180° Wafer  
Pitch 4.14mm

Part No.: **T68R1027**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)





Ordering Informations

Serie	Number of	Contact	Packing						
T68R1027	02	T	BU						

02 = 2 Pols	T= Tin Plated (Standard)	BU = Bulk (standard)							
	G= Gold Flash Plated (MQO Important)	TY = Tray packing							




180° Wafer Pitch 4.14mm
Part No.: <b>T68R1027</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



## Soldering - Profile

### Classification Reflow Profile (JEDEC J-STD-020C)

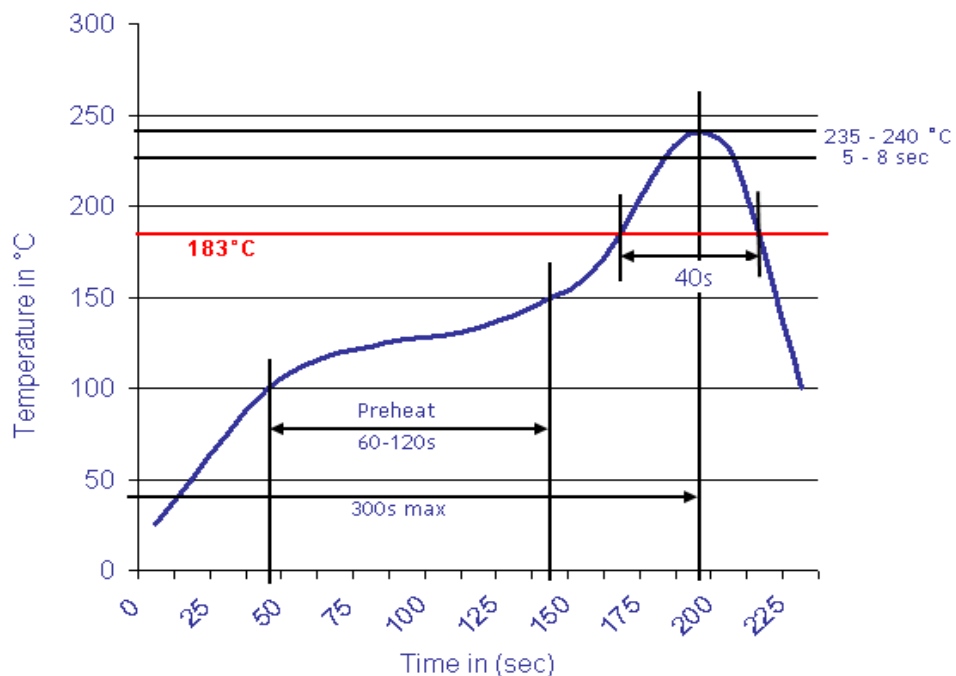

180° Wafer  
Pitch 4.14mm

Part No.: **T68R1027**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	

Customer: