


EDCON-COMPONENTS



Specifications

Current Rating	4A AC,DC
Voltage rating	250V AC,DC
Temperature range	-25°C ~ +85°C
Contact resistance	10mΩ max.
Insulation resistance	1000MΩ min.
Withstanding voltage	1500V AC/minute
Material:	Nylon 66 (UL94V-0)

Drawing (dimensions all into mm)

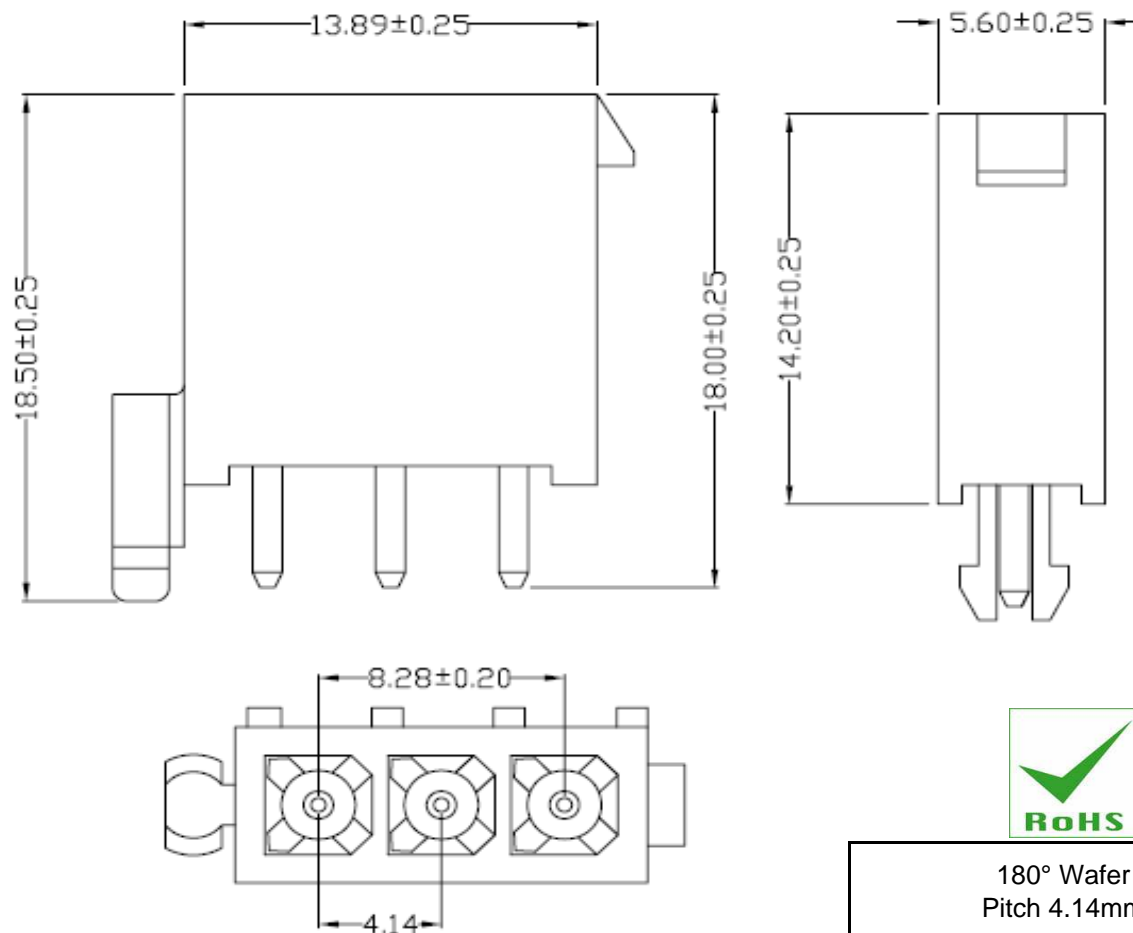

180° Wafer
Pitch 4.14mm

Part No.: **T68R1028**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

www.edcon-components.com

email: info@edcon-components.com



Ordering Informations

Serie	Number of	Contact	Packing						
T68R1028	03	T	BU						

03 = 3 Pols	T= Tin Plated (Standard)	BU = Bulk (<i>standard</i>)							
	G= Gold Flash Plated (MQO Important)	TY = Tray packing							




180° Wafer Pitch 4.14mm
Part No.: T68R1028
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering - Profile

Classification Reflow Profile (JEDEC J-STD-020C)

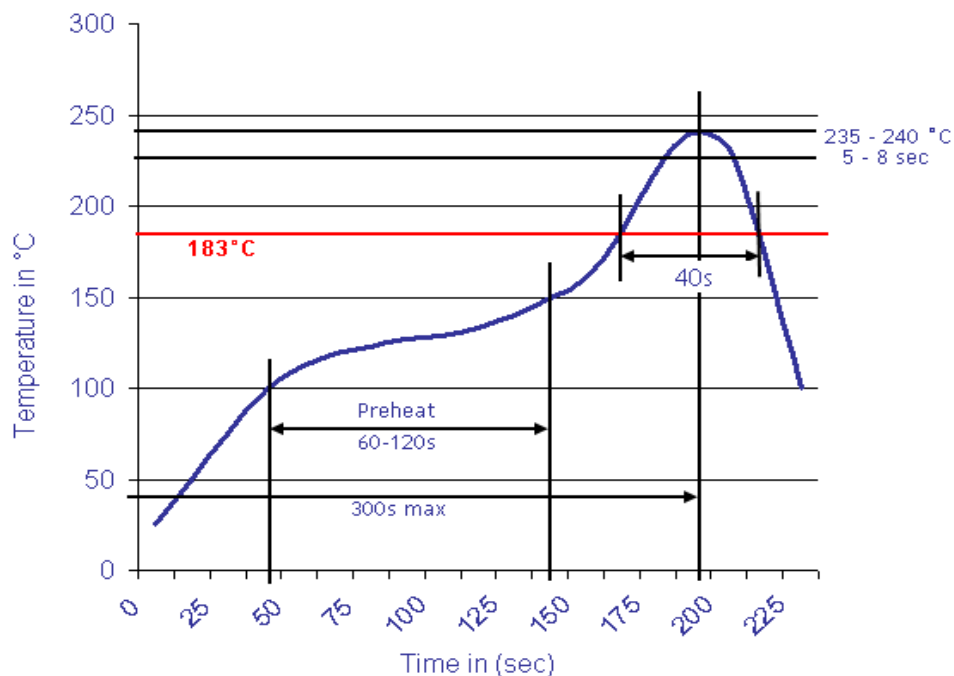

180° Wafer Pitch 4.14mm	
Part No.:	T68R1028
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	