




# EDCON-COMPONENTS





## Specifications

Voltage Rating:	250V AC,DC
Current Rating	3A AC/DC
Operating Temperature	. -25°C ~ + 85°C
Contact Resistance	30 milli Ohm max.
Withstanding Voltage	1000V AC/minute
Insulation Resistance	1000 M Ohm min.
Material Pin:	Phosphor Bronze / Tin plated
Wafer	Nylon 66 UL94V-0

## Drawing ( dimensions all into mm)

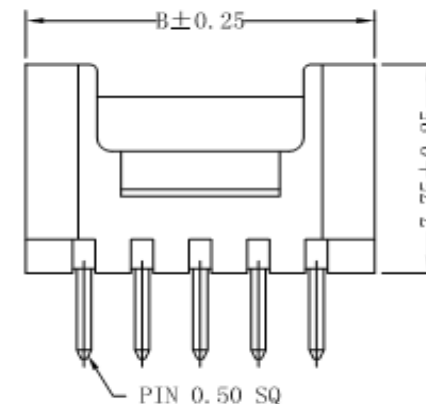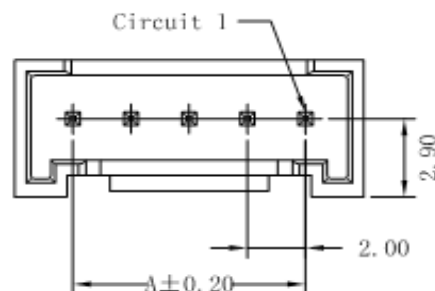

## Terminal Assembly Drawing

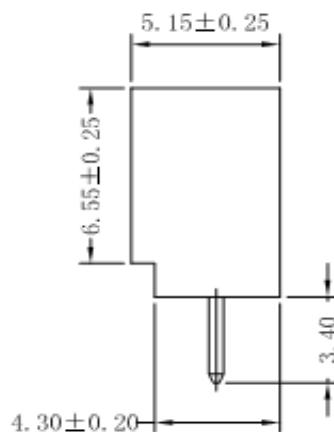

Wafer Serie T68T1006 Pitch  
2,00mm

Part No.: **T68T1006**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)





## Ordering Informations

Serie	Number of Pos.	Contact plating	Packing						
-------	----------------	-----------------	---------	--	--	--	--	--	--

<b>T68T1006</b>	<b>02</b>	<b>T</b>	<b>BU</b>						
-----------------	-----------	----------	-----------	--	--	--	--	--	--

<b>xx = Pos.</b>	<b>T= Tin</b>	<b>BU= Bulk</b>							
	<b>G= Flash Gold</b>								



Wafer Serie T68T1006 Pitch 2,00mm	
Part No.:	<b>T68T1006</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	