


EDCON-COMPONENTS






Specifications

Voltage Rating:	250V AC/DC
Current Rating	3A AC/DC
Operating Temperature	-25°C ~ +85°C
Contact Material:	Phospor Bronze
Contact Resistance	30 milli Ohm max.
Withstanding Voltage	1000V AC/minute
Insulation Resistance	1000M Ohm min.
Applicable Wire	
Applicable P.C.B	
Applicable FPC/FFC	
Solder Height	
Crimp Tensile Strength	
Contact Plating:	Tin / Plated (Standard)

Terminal Assembly Drawing

Drawing (dimensions all into mm)

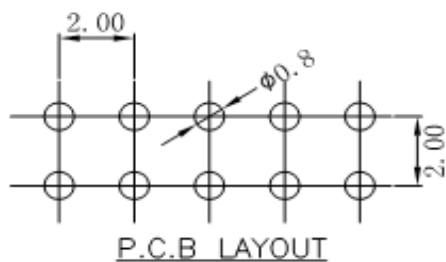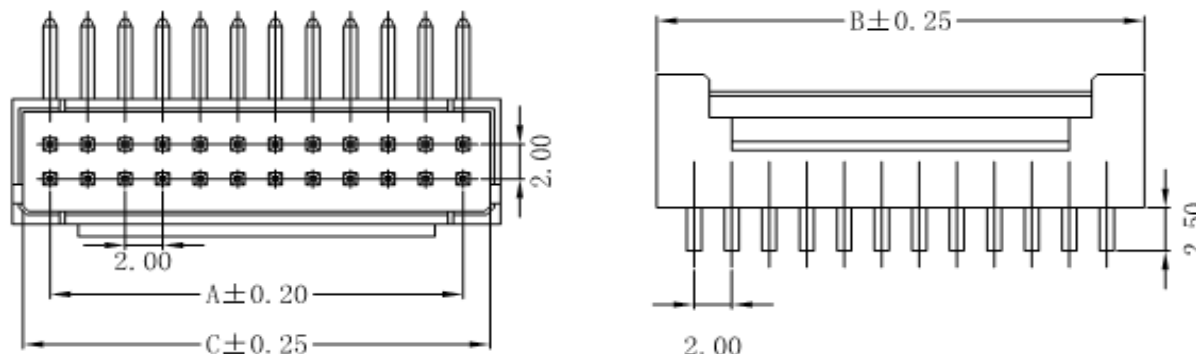


Wafer Serie T68T1014 Pitch
2,00mm

Part No.: **T68T1014-**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	11.04.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Pos.	Contact Plating	Packing							
-------	----------------	-----------------	---------	--	--	--	--	--	--	--

T68T1014-	04	T	BU							
------------------	-----------	----------	-----------	--	--	--	--	--	--	--

xx = Pos.	T= Tin Plated (Standard)	BU= Bulk (Standard)								
		TY= Tray Packing								
	G= Gold Flash Plated (MOQ important)									

Wafer Serie T68T1014 Pitch 2,00mm
Part No.: T68T1014-
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	11.04.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

www.edcon-components.com

email: info@edcon-components.com