


NOTE:

- SOLDERTAIL TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANALITY OF SOLDERTAILS TO BE WITHIN 0.10 MEASUREMENT POINT IS SOLDERTAILS TIP.
- INSPECTION SYMBOL:
 - : MANUFACTURER INSPECTION
 - ◆ : Q.C INSPECTION
- ACCORDING HSF CONCRAFT LEVEL1

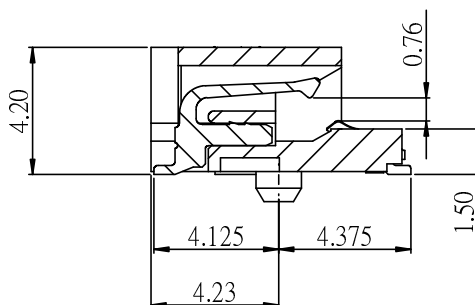


H-H (4 : 1)

				GENERAL TOLERANCE		DRAW: Roy	PART NO: 106322BE40A
				X. ±0.30	X' ± 2.00'	CHECKED:	TITLE: MXM 3 CONNECTOR 0.50PITCH 314PIN
				X ±0.20	.X' ± 1.00'		
				.XX ±0.10	.XX' ± 0.50'		
				.XXX ±0.05		APPROVE:	DRAWING NO: 106322BE40A
				UNITS: mm	SHEET: 1 / 3		

REV.	ECO NO.	DRAW	DATE	⊕
MATERIAL:	FINISH:	DATE: 08 / 19 / 2008	REV: A0	



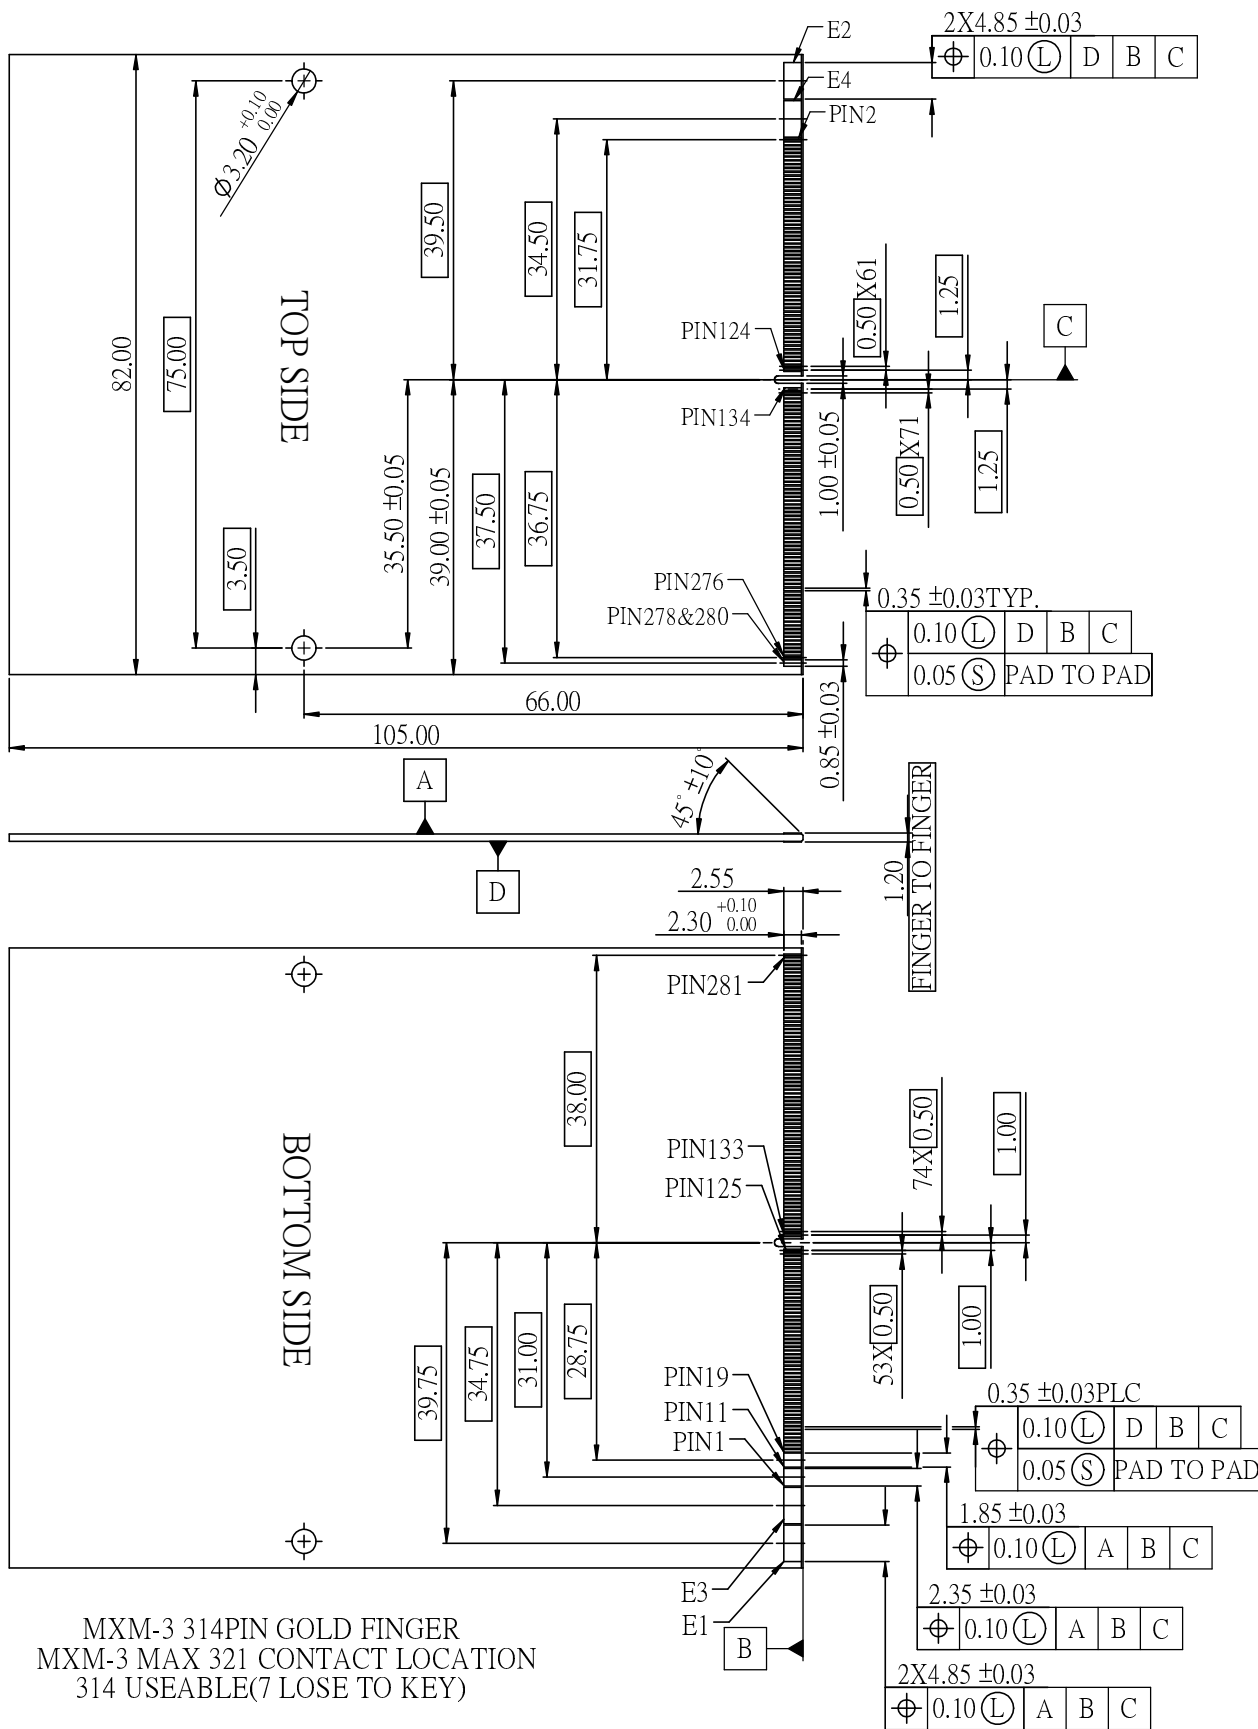


MXM-3 314PIN GOLD FINGER
 MXM-3 MAX 321 CONTACT LOCATION
 314 USEABLE(7 LOSE TO KEY)

				GENERAL TOLERANCE		DRAW:	PART NO:
				X. ±0.30	X.' ± 2.00'	Roy	106322BE40A
				X ±0.20	.X' ± 1.00'	CHECKED:	TITLE:
				.XX ±0.10	.XX' ± 0.50'		MXM3 CONNECTOR 0.50PITCH 314PIN
				.XXX ±0.05		APPROVE:	DRAWING NO:
				UNITS: mm	SHEET: 2 / 3		106322BE40A


REV.	ECO NO.	DRAW	DATE	
MATERIAL:	FINISH:	DATE:	REV.	
		08 / 19 / 2008	A0	



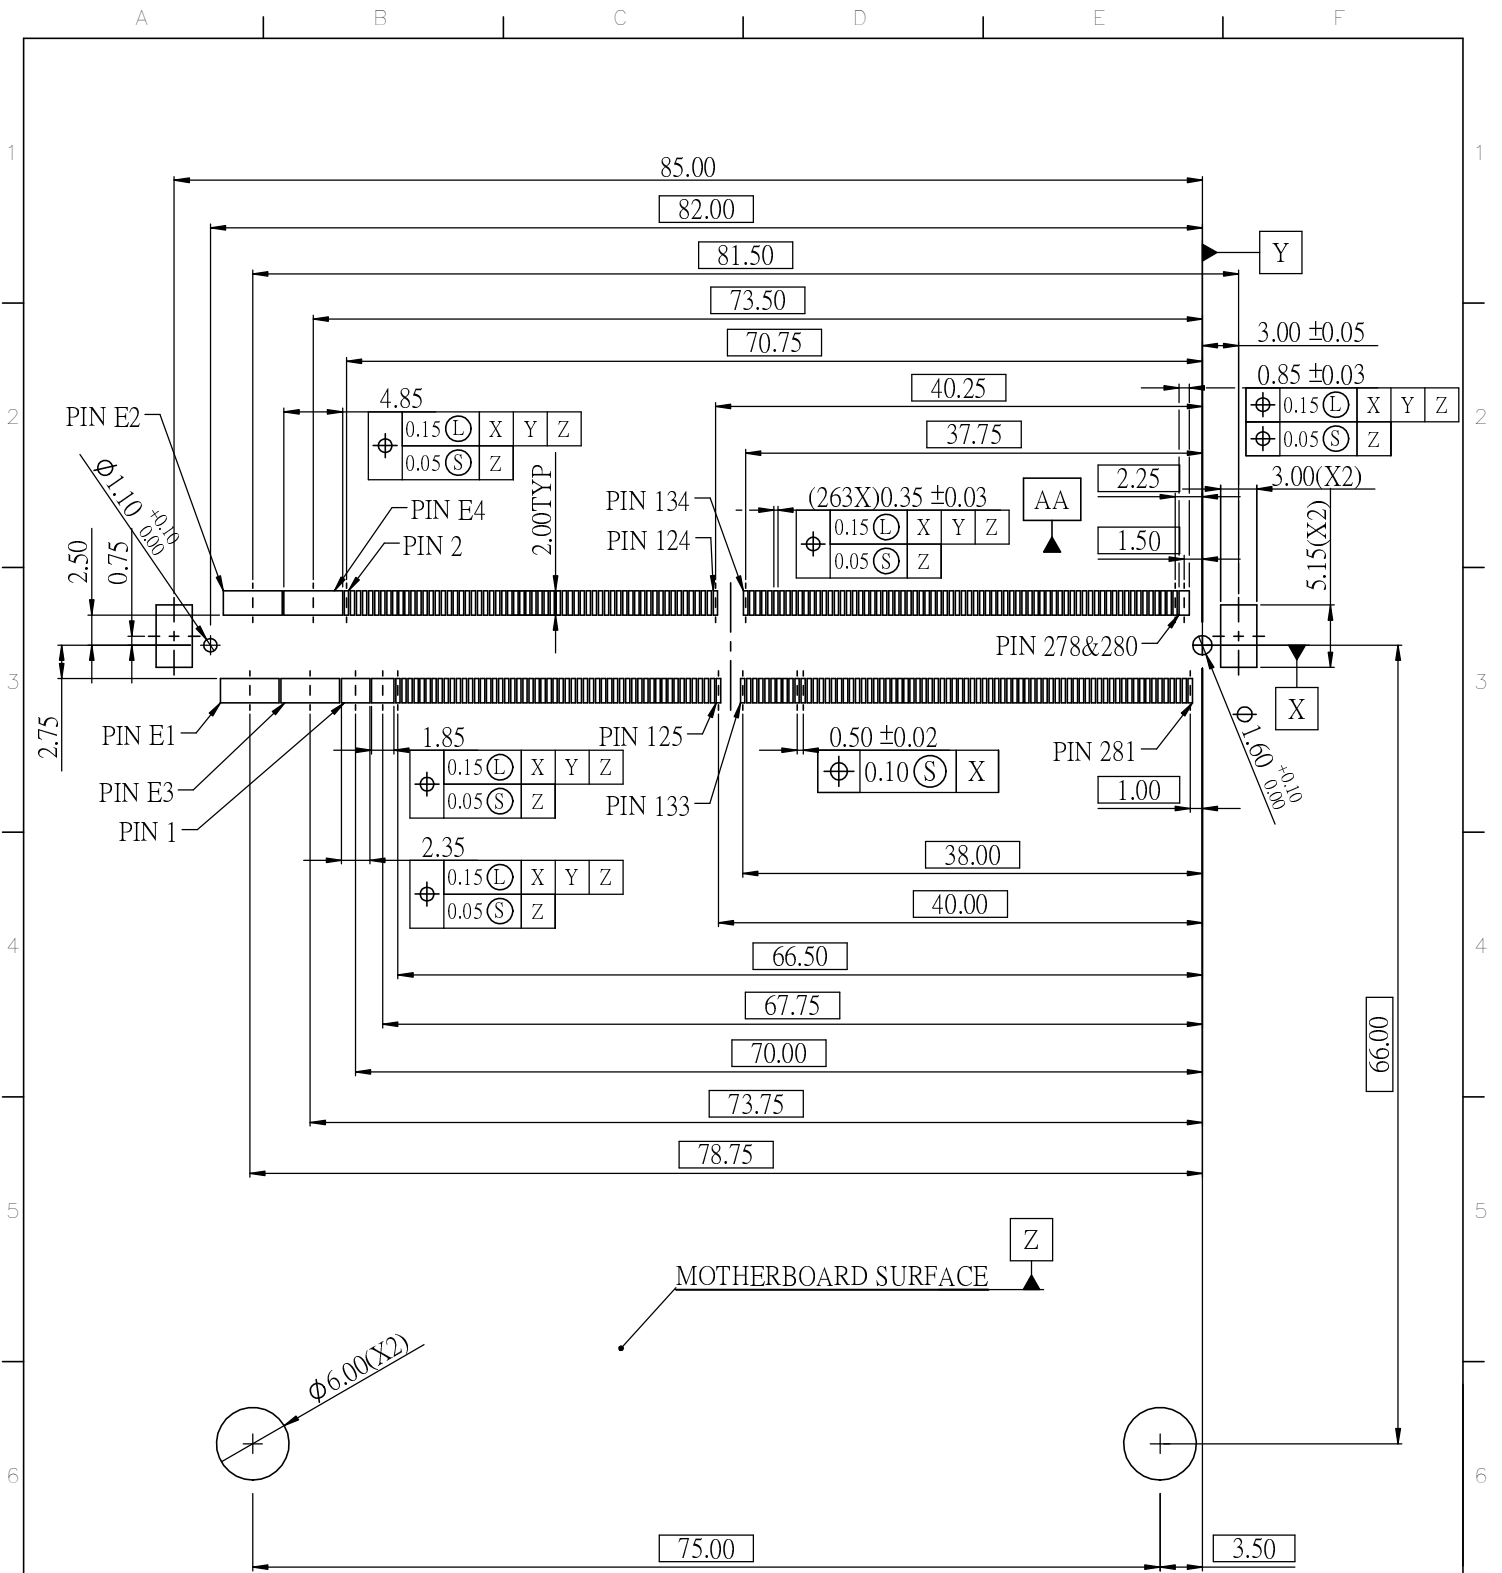

RECOMMENDED PCB LATOUT

				GENERAL TOLERANCE		DRAW: Roy	PART NO: 106322BE40A
				X. ±0.30	X' ±2.00'		
				X ±0.20	.X' ±1.00'	CHECKED:	TITLE: MXM3 CONNECTOR 0.50PITCH 314PIN
				.XX ±0.10	.XX' ±0.50'		
				.XXX ±0.05		APPROVE:	DRAWING NO: 106322BE40A
				UNITS: mm	SHEET: 3 / 3		

REV.	ECO NO.	DRAW	DATE	 REV. A0
MATERIAL:		FINISH:	DATE: 08 / 19 / 2008	

