



DATA SHEET


THT BCD ROTARY Switch

Serie: Q27012

THT BCD ROTARY Switch	
Serie No.:	Q27012
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.07.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 6	

EDCON-COMPONENTS



Specifications

Material

Housing/Knob: Thermoplastic
 O-Ring: Silicone Rubber
 Terminal: Precious metal on phosphor bronze

Mechanical:

Switching Positions: 8, 10, 16 positions
 Operating force: 350gr-cm max.
 Life: 10.000detens

Electrical:

Max. Load Rating:
 Switching: 50mA, 24VDC
 Non Switching: 100mA, 50VDC
 Contact Resistance: 100mΩ max.
 Insulation Resistance: 1000M Ω at 100VDC
 Dielectric Strength: 250VAC for 1 minute

Environmental:

Operating Temperature: . -25°C to +80°C
 Soldering Temperature: max. 250 ± 5°C for 5 seconds

Features

Fully Sealed construction
 Low Profile , Low Cost
 Gold Plated contacts
 Molded-In terminals
 Snap-In mounting on PCB

THT BCD ROTARY Switch

Part No.: **Q27012**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.07.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 6

EDCON-COMPONENTS



Switch Code

BCD Order Code = 08S					
Position	BCD 8 Position				
	Common c contacted				
	1	2	4	8	C
0					
1					
2					
3					
4					
5					
6					
7					

BCD Order Code = 16S					
Position	BCD 16 Position				
	Common c contacted				
	1	2	4	8	C
0					
1					
2					
3					
4					
5					
6					
7					
8					
9					
A					
B					
C					
D					
E					
F					

BCD Order Code = 10C					
Position	BCD Complement 10Pos.				
	Common c contacted				
	1	2	4	8	C
0					
1					
2					
3					
4					
5					
6					
7					
8					
9					

BCD Order Code = 10S					
Position	BCD 10 Position				
	Common c contacted				
	1	2	4	8	C
0					
1					
2					
3					
4					
5					
6					
7					
8					
9					

THT BCD ROTARY Switch	
Part No.:	Q27012
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.07.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 6

EDCON-COMPONENTS




Switch Code

Technical Dimensions (mm)

PCB Layout (mm)

BCD Order Code = 16C					
Position	BCD Complement 16 Position				
	Common c contacted				
	1	2	4	8	C
0					
1					
2					
3					
4					
5					
6					
7					
8					
9					
A					
B					
C					
D					
E					
F					

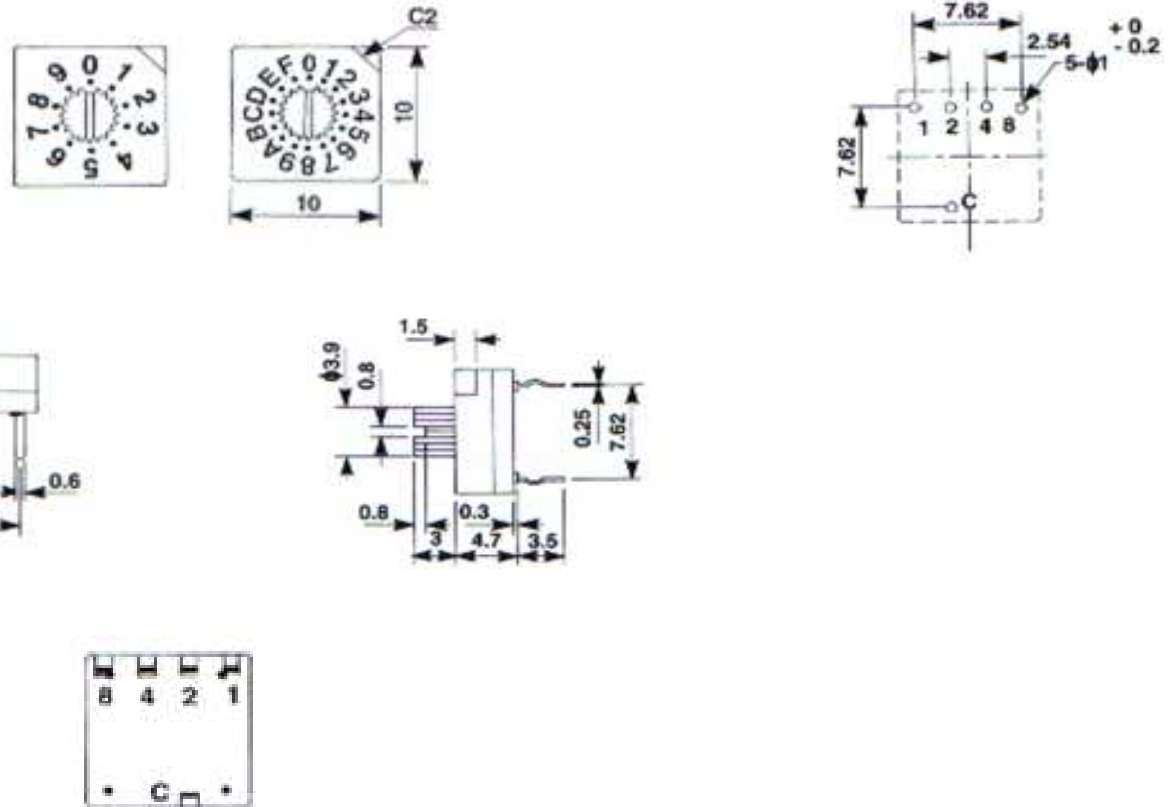


Terminal Order Code 4 = (4+1)

THT BCD ROTARY Switch	
Part No.:	Q27012
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.07.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 6

EDCON-COMPONENTS



Ordering Informations


Serie	BCD Order Code	Rotor Style	Terminal Style	ROHS	Packing Code					
-------	----------------	-------------	----------------	------	--------------	--	--	--	--	--

Q27012	10S	03	4	R	TU					
---------------	------------	-----------	----------	----------	-----------	--	--	--	--	--

10S = Type 10S	03 = 3mm Knob Type	4 = (4+1) Legs	R = ROHS Conform	TU = Tube Packing
08S = Type 08S			N = NON ROHS Conform	TY = Tray Packing
16S = Type 16S			BU = Bulk Ware	
10C = Type 10C				
16C = Type 16C				


THT BCD ROTARY Switch
Part No.: Q27012
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.07.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.	5 from 6	



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

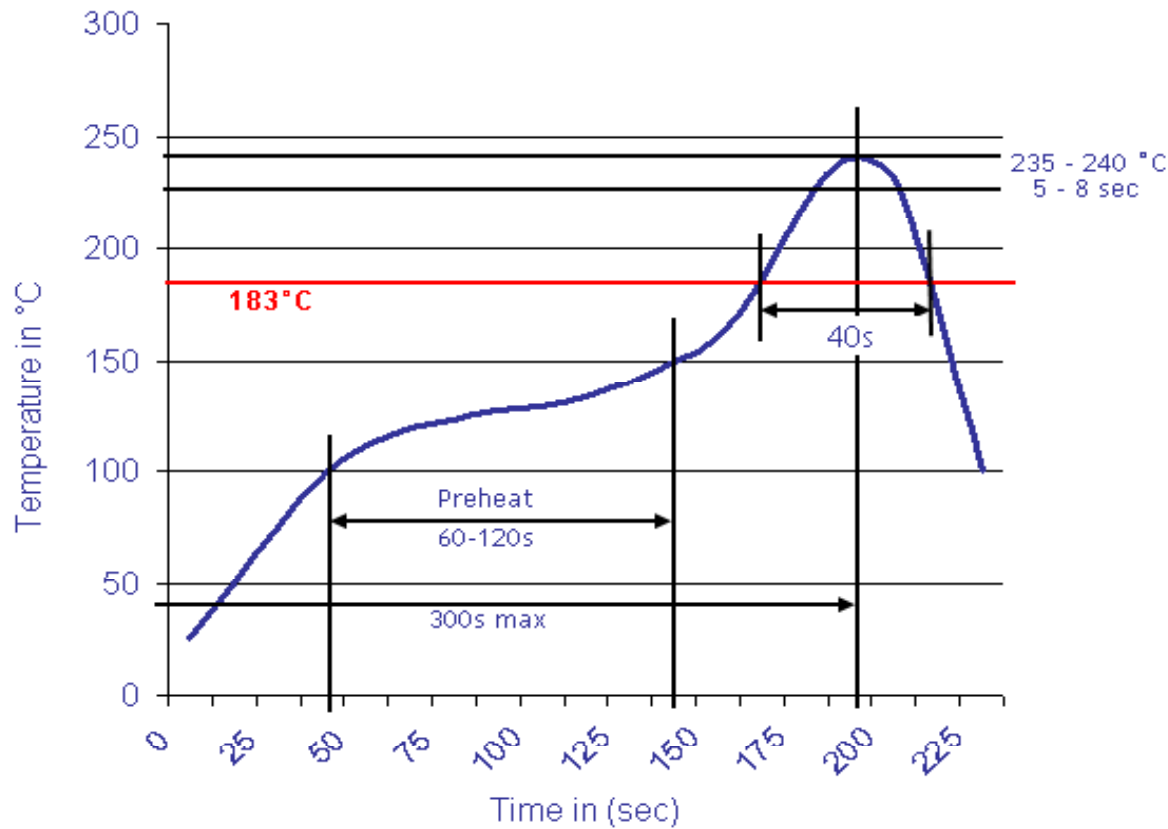

THT BCD ROTARY Switch	
Part No.:	Q27012
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.07.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.	6 from 6	