



# DATA SHEET

**Metallized polypropylene film interference suppression capacitor Class Y1 440Vac**

**Serie: I35001**

Code / Range **472= 0,0047µf**

Code / Volt **441= 440VAC**

Width **17,5 mm**

Height **14,0 mm**

Thickness **8,0 mm**

Pitch **15,0 mm**

**Metallized polypropylene film  
interference suppression  
capacitor Class Y1 440Vac**

Serie No.: **I35001**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.05.2011	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 5		




**Features**

- Metallized polypropylene structure
- Withstanding overvoltage stressing
- Excellent active and passive flame resistant abilities
- Widely used in line-by-pass antenna Coupling, interference suppression circuit, etc.

**Dimensions**

**Specifications**

Climatic Category/ passive Flammability Class	40/110/56B	
Operating Temperature Range:	. -40°C ~ +110°C	
Class	Y1	
Rated Voltage:	440VAC	
Maximum continuous AC voltage	750VAC	
Maximum continuous DC voltage	3000VDC	
Capacitance Range:	0,00047μF ~ 0,022μF	
Capacitance Tolerance:	± 10% (K), ± 20% (M)	
Voltage Proof	Between Terminals:	4000 (Vacc) (2s)
	Between Terminals to Case:	4000 (Vac) (1min)
Insulation Resistance	≥15000MΩ	( 20°C, 100V, 1min)
Dissipation Factor	≤10x10 <sup>-4</sup> (1kHz,20°C)	≤20x10 <sup>-4</sup> (10kHz,20°C)
	IEC 60384-14:2005(ed3), Y1, 440VAC, 0,00047μF ~ 0,022μF, 40/110/56B Certificate No. CQC10001044432	

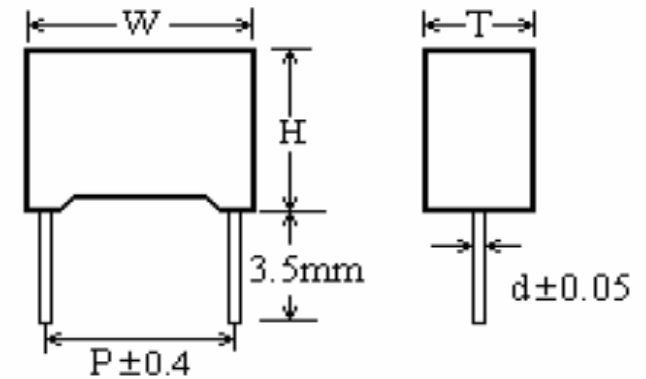

Case Dimension table				
Case Code	W ±0,4 (mm)	H ±0,4 (mm)	T ±0,4 (mm)	P (mm)
<b>A</b>	17,5	14,0	8,0	15,0

C ±0,5 (mm)	
Standard Length 3,5mm	





d ±0,05 (mm)	
d= 0,8mm	

**Metallized polypropylene film interference suppression capacitor Class Y1 440Vac**  
 Part No.: **I35001**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.05.2011	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 5		



**Lead Style Information**



**Lead Style A -Type**  
 0mm ≤P-F≤3mm

**Lead Style B -Type**  
 3mm ≤P-F≤8mm

**Lead Style C -Type**  
 3mm ≤P-F≤5mm

**Lead Style D -Type**  
 0mm ≤P-F≤3mm

**F±1,0mm; A≤5,0mm; B=3,5±0,5mm**

**Metallized polypropylene film  
 interference suppression  
 capacitor Class Y1 440Vac**  
 Part No.: **I35001**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.05.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 5

Customer:



**Ordering Informations**

Serie	Range	Tolerance	Voltage	Case Code	Pitch Code	Lead Style	Lead Length C	ROHS	Packing Code	
<b>I35001</b>	<b>472</b>	<b>M</b>	<b>441</b>	<b>A</b>	<b>6</b>	<b>A</b>	<b>35</b>	<b>R</b>	<b>BU</b>	

<b>472=</b> 0,0047µf	<b>M=</b> 20% Standard <b>K=</b> 10%	<b>441=</b> 440VAC	<b>A=</b> look Case Dimension	<b>6=</b> 15,0mm	<b>A=</b> Standard <b>B=</b> Type <b>C=</b> Type <b>D=</b> Type <b>E=</b> Type	<b>35=</b> Lead Length 3,5mm	<b>R=</b> ROHS Conform <b>N=</b> NON ROHS Conform	<b>BU=</b> Bulk Ware <b>TB=</b> Tape Box <b>IV=</b> Individual Package
-------------------------	--	-----------------------	----------------------------------	------------------	--	------------------------------------	---	---

**Metallized polypropylene film  
 interference suppression  
 capacitor Class Y1 440Vac**

Part No.: **I35001**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.05.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 5

Customer:



**Soldering Profile Curve**

**Classification Reflow Profile (JEDEC J-STD-020C)**

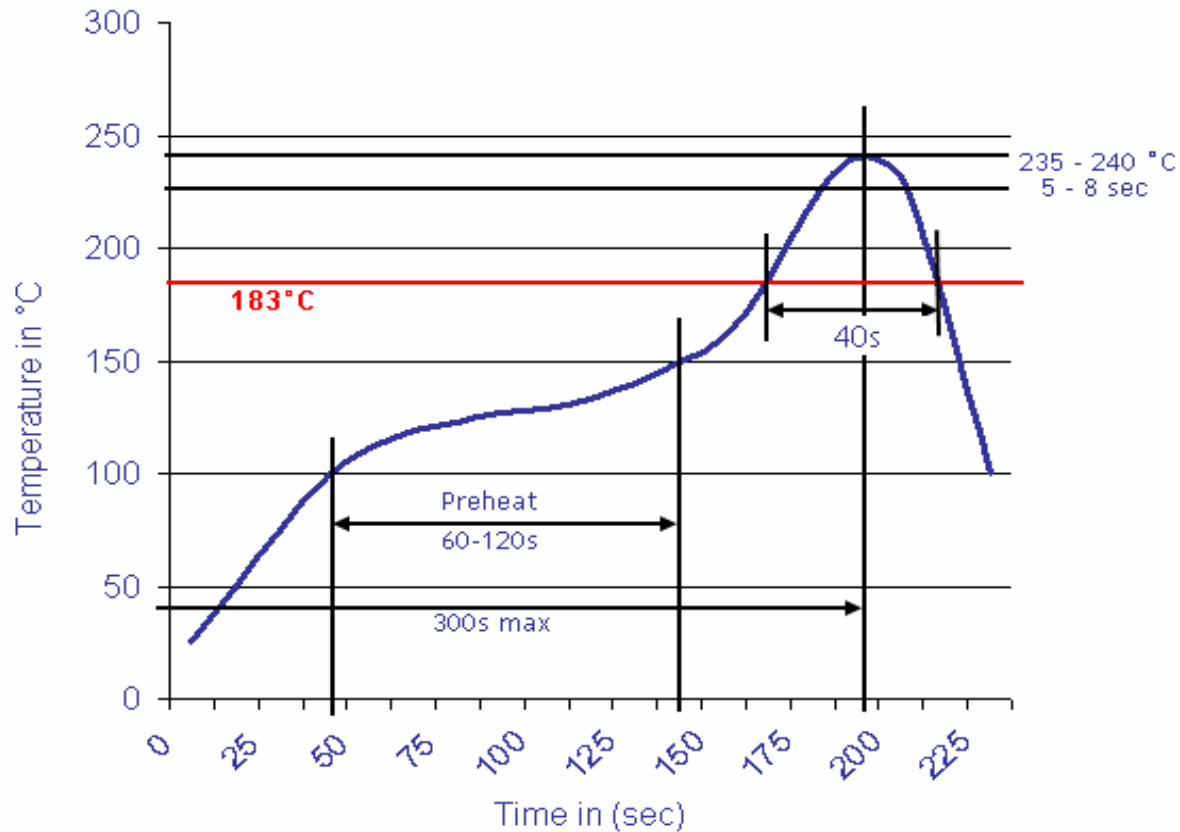

**Metalized polypropylene film  
 interference suppression  
 capacitor Class Y1 440Vac**  
 Part No.: **I35001**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.05.2011	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	5 from 5		