

EDCON-COMPONENTS




Characteristics

Item	Characteristics	Test Method
Operating Temp. Range	. -55°C ~ 155°C	
Temperature Coefficient	. +/- 100ppm 50ppm, 25ppm, 15ppm/°C	JIS-C 5202; 5,2
Short Time overload	. +/- (0,5% + 0,05 Ohm)	Rating Voltage x 2.5 or Max. Overload voltage for 5 sec. Whichever less
Pulse Overload	. +/- (0,5% + 0,05 Ohm)	Rating Voltage x 3 or Max. pulse overload voltage for 10.000 cycle (1sec. "on 25 sec "off". Whichever less
Temperature cycling	. +/- (0,5% + 0,05Ohm)	. -55°C (30min) / +85°C (30min) for 5 cycle
Load Life Humidity	. +/- (1% + 0,05 Ohm)	40°C +/- 2°C, 90%~95% R, 1000h, 1,5h "on" / 0,5h "off" cycle
Load Life	. +/- (1% + 0,05 Ohm)	70°C +/- 2°C, 1000h, 1,5h "on" / 0,5h "off" cycle
Resistance to Soldering heat	. +/- (0,5% + 0,05 Ohm)	260°C +/- 5sec, 5sec +/- 1 sec
Solderability	90% Coverage Min.	235°C +/- 5sec, 2sec +/- 0,5 sec
Bending test	. +/- (0,5% + 0,05 Ohm)	Holding point width 90mm, Bending 5mm, 1 time
Non-Combustibility	The resistor shall withstand Overload test in accordance with Article UL-94, V-0 without producing a fire hazard.	

Technical Informations

Serie	Size	Dimensions (mm)			S	
		L	D	C	Max	Min
X23002	0207	5,7 / +/-0,2	2,2 / +/-0,1	0,8 / +/-0,1	2,30	2,00

Technical Drawing Case

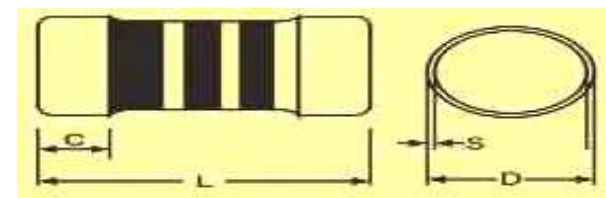

Packing Informations

Serie	Size	Tape/Reel	Bulk	Carton
X23002	0207	2000PCS	-----	-----

Metallfilm Melf Resistor Size 0207

Part No.: **X23002**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4

EDCON-COMPONENTS



Range Specification Value

Serie	Size	Ordering Code Power	Power Rating	Max Working Voltage	Max Overload Voltage	T.C.R.	Resistance Range				
							. +/- 0,1%	. +/- 0,25%	. +/- 0,5%	. +/- 1%	. +/- 5%
X23002	0207	B	0,25W	200V	400V	. +/- 15ppm . +/- 25ppm . +/- 50ppm . +/- 100ppm	100R ~ 100K	100R ~ 100K	10R ~ 560K	1,0R ~ 5,0M	0,22R ~ 2,0M
		C	0,50Ws	300V	600V		100R ~ 100K	100R ~ 100K	10R ~ 560K	1,0R ~ 5,0M	0,22R ~ 2,0M
		D	1,0Ws	400V	700V		100R ~ 100K	100R ~ 100K	10R ~ 560K	1,0R ~ 5,0M	0,5R ~ 2,0M

**Metallfilm Melf Resistor
Size 0207**

Part No.: **X23002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	Range Code	Ordering Power Code	T.C.R Code	Tolerance Code	ROHS	Packing Code				
X23002	104	B	1	A	R	TR20				

104= 100K Resistance Range look table	B= 0,25W	1= +/- 15ppm	A= Tol. +/- 0,1%	R= ROHS Conform	TR20= Tape Reel 2000PCS
	C= 0,50W	2= +/- 25ppm	B= Tol. +/- 0,25%	N= NON ROHS	
	D= 1,0W	3= +/- 50ppm	C= Tol. +/- 0,5%		BU05= Bulk Ware 500PCS
		4= +/- 100ppm	F= Tol. +/- 1%		
			J= Tol. +/- 5%		

**Metallfilm Melf Resistor
Size 0207**

Part No.: **X23002**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:




Soldering Profile Curve

Soldering Profile for Lead Soldering

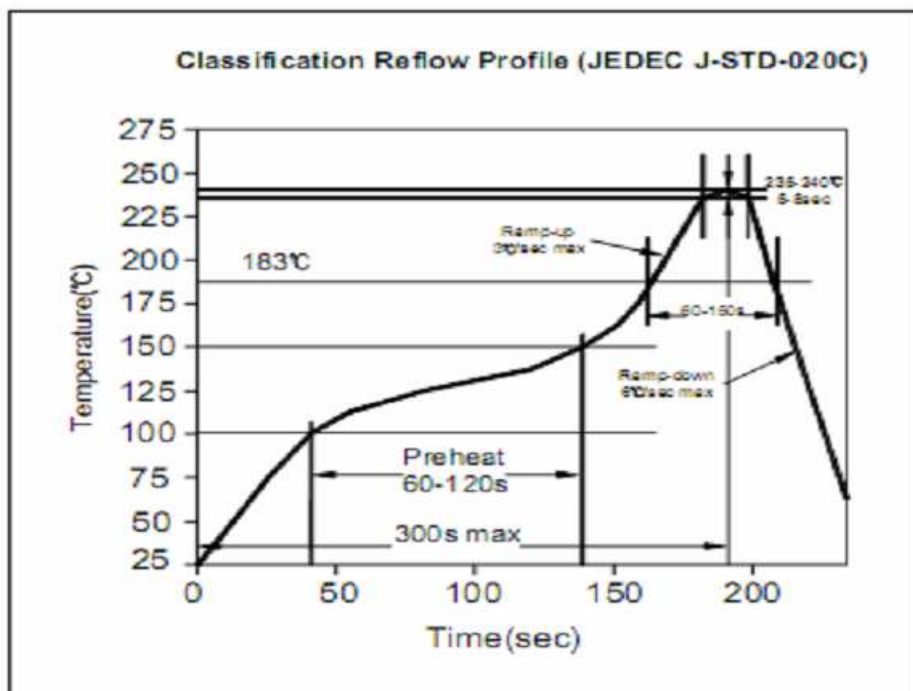

Soldering Profile for Lead Free Soldering

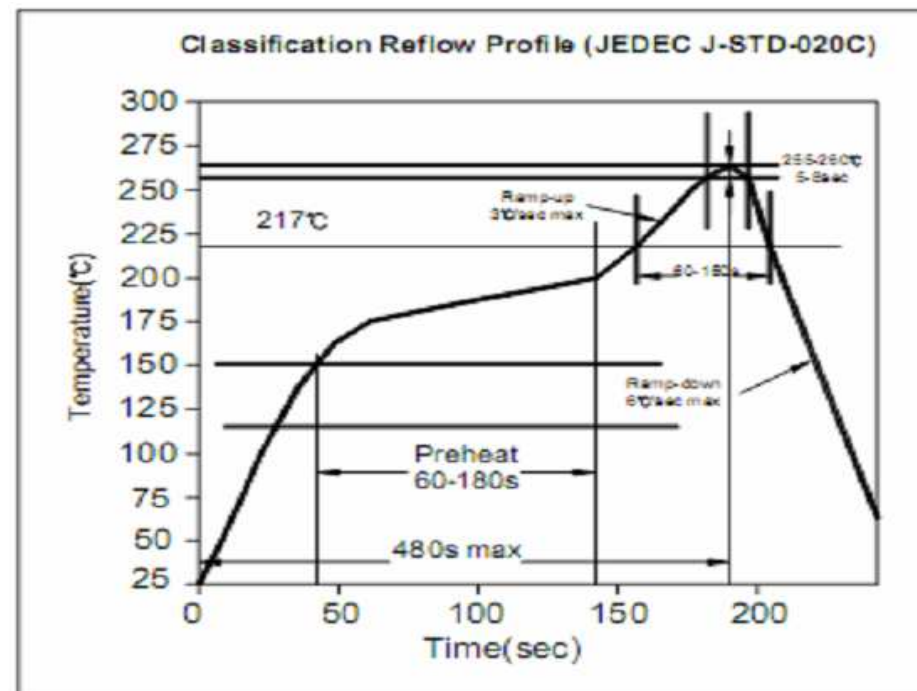

**Metallfilm Melf Resistor
Size 0207**

Part No.: **X23002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4		